EASI FILE CORP. IRVINE, CA — EFH 34

84

84-5

REPAIR EXISTING WOOD PORCH & STAIRS – THEN, PAINT ENTIRE WOOD STRUCTURE

KITCHEN AREA:
1. PROVIDE OVERCOUNTER CABINETS AS INDICATED – MOUNT NEW CABINETS: 18" ABOVE COUNTERS & SINK 30" ABOVE STOVE
2. OWNER WILL PROVIDE APPLIANCES.
3. OWNER WILL SELECT FLOOR FINISHES.

WOOD SASH WINDOWS TO BE RESTORED OR REPLACED WITH WOOD SASH WINDOWS OF IDENTICAL SIZE, SHAPE AND STYLE RAISED PANEL. WOOD AREAS TO BE REFINISHED.

CONTRACTOR SHALL PROVIDE THE LABOR, EQUIPT. & MATERIALS FOR INSTALLATION OF SINGLE SHELVES IN ALL CLOSETS AND 4 SHELVES IN LINEN CLOSET. INSTALL CLOSET RODS IN ALL CLOSETS. SHELVING TO BE #2 PINE.

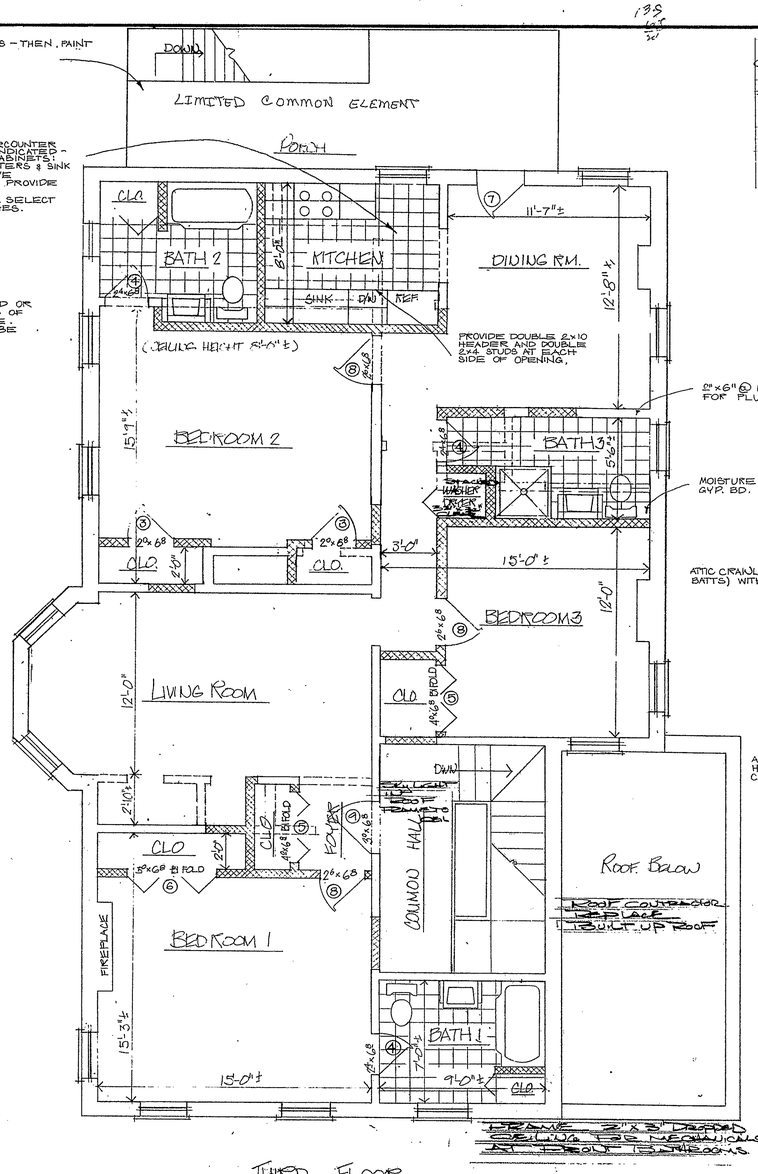

CARPENTRY CONTRACTOR FRAME A/C CONDITIONING DUCT WORK WITH 2"x 3" FRAME FOR GYP. CONTRACTOR.

ROOF CONTRACTOR REPLACE BUILT UP ROOF

FRAME 2"x 3" DROPPED CEILING FOR MECHANICAL AIR DUCT THROUGHOUT



FLOOR PLAN
UNIT A-3
1511 Sq. FT.

PLAN NORTH

THE UNDERSIGNED DOES HEREBY CERTIFY THAT THESE PLANS CONTAIN INFORMATION REQUIRED BY SECTION 39 OF THE COMMON INTEREST OWNERSHIP ACT. RELATING TO PLANS.

Feb. 87
Nov 7-24-86

3RD FLOOR PLAN

1575, 1577, & 1579 MAIN STREET
HARTFORD, CONNECTICUT

6

DATE: JULY 1985 | SCALE: 1/4"=1'-0" | SHEET 6 OF

Condo Plans #84

RECD. VIA UPS
FEB 18 9 26 AM '87
TOWN & CITY CLERK
HARTFORD
VOL. PAGE