



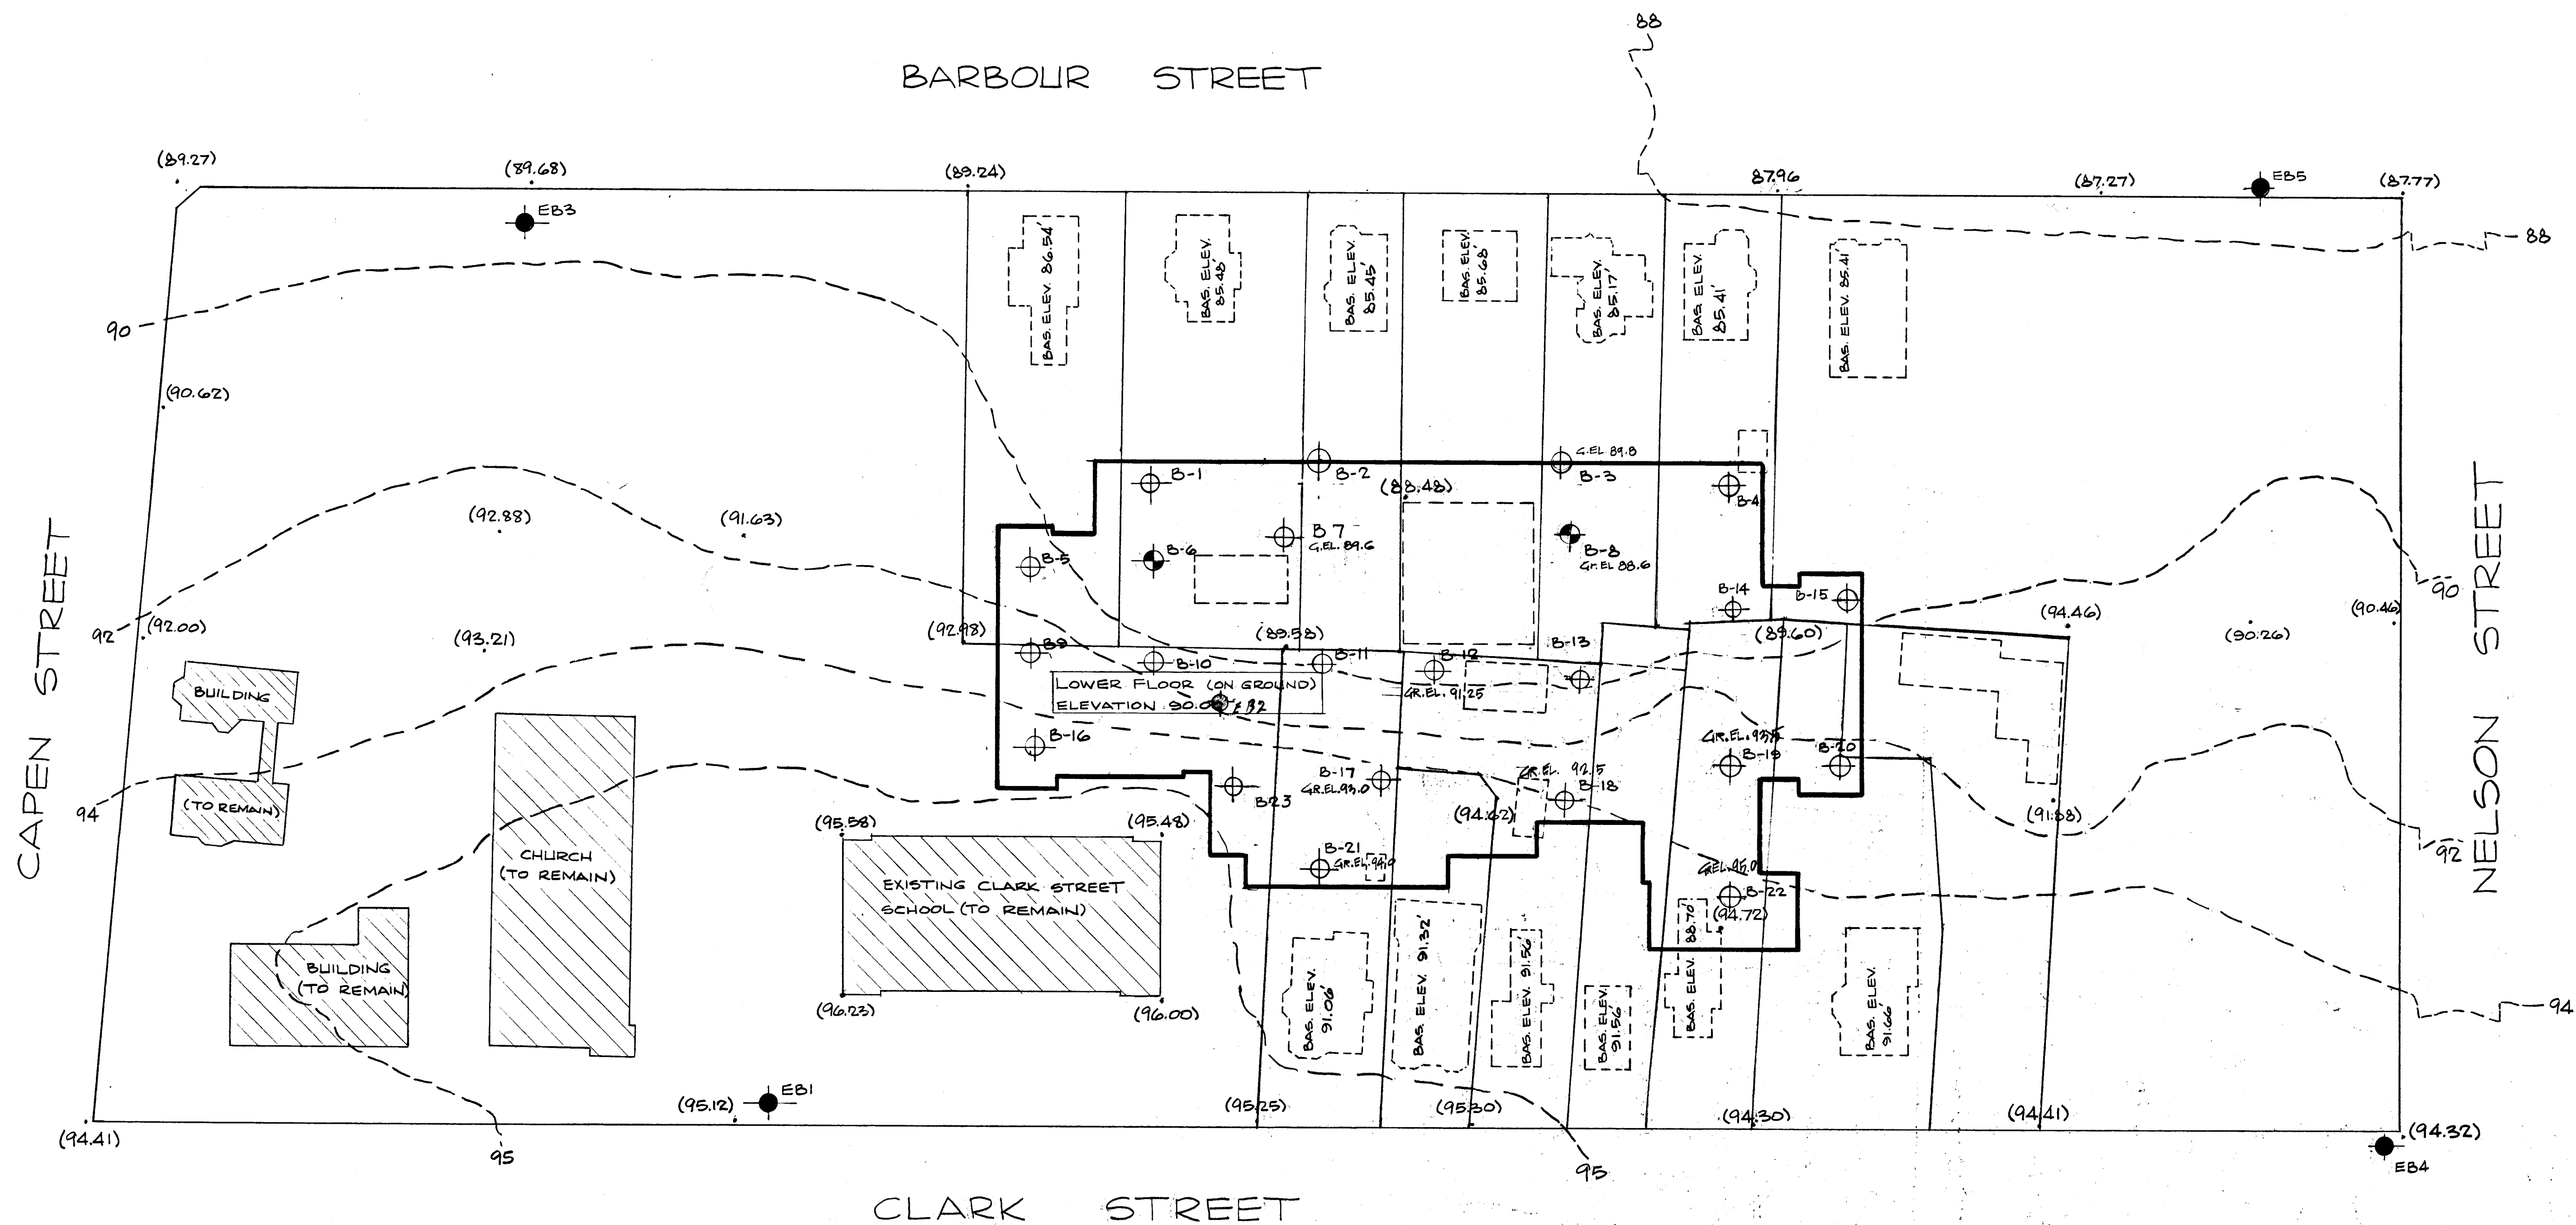

PROPOSED SOIL BORING PROGRAM


SCALE: 1" = 40'

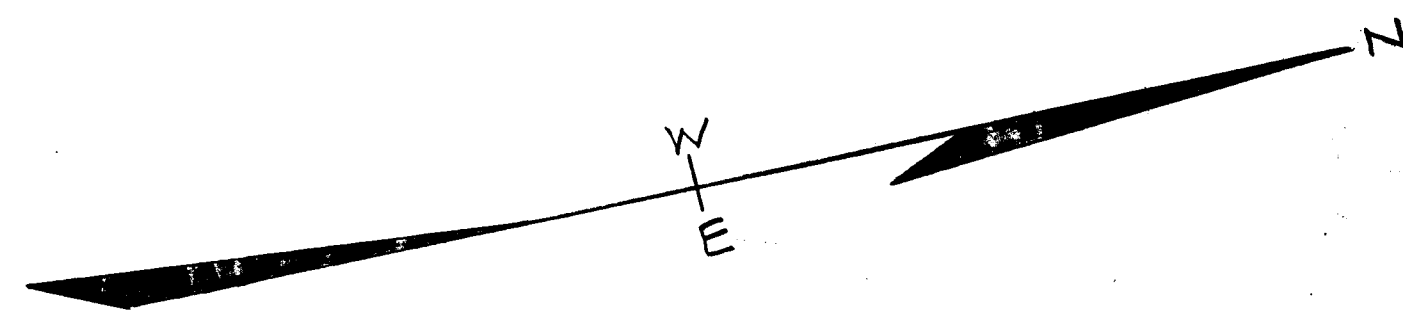

NOTES:

1. BORINGS MADE DURING PRELIMINARY SURVEY. DATA IS AVAILABLE FOR INSPECTION AT THE ENGINEERING DEPARTMENT OF THE CITY OF HARTFORD.
2. STANDARD BORINGS TO BE MADE IN THIS PROGRAM. ALL SHALL BE TO 20 FT. DEPTH.
3. BORINGS TO BE MADE TO 80 FT. DEPTH, 3" ϕ UNDISTURBED SAMPLER. TAKE 3 SAMPLES PER BORING. THE FIRST SHALL BE TAKEN SOON AFTER CONTACT WITH SOFT CLAY. THE OTHER TWO SAMPLES SHALL BE TAKEN AT 15 FT. INTERVALS. AFTER 80 FT. USE AN OPEN-END PIPE PROBE FOR AN ADDITIONAL 40 FT. MAX. OR UNTIL A FIRM SOIL IS ENCOUNTERED.
4. CONTINUOUS SAMPLING SHALL BE MADE FOR THE FIRST 10 FEET OF ALL BORINGS.
5. CONTOURS SHOWN ARE EXISTING, AND WILL BE FINISHED GRADES OUTSIDE OF NEW BUILDING.
6. BUILDINGS OUTSIDE OF IMMEDIATE AREA OF NEW SCHOOL NOT SHOWN.

BORING	Nº	GROUND ELEVATION
1		89.7
2		89.6
3		89.8
4		90.7
5		91.2
6		90.0
7		89.6
8		88.6
9		94.1
10		94.33
11		92.0
12		91.25
13		91.0
14		89.6
15		88.75
16		95.1
17		93.0
18		92.50
19		93.50
20		92.75
21		94.0
22		95.0
23		95.25
24		



ADDITIONAL TEST BORING, OCT. 2, 1968.

August 27 - 1968.

CLARK STREET
ELEMENTARY SCHOOL
HARTFORD
CONNECTICUT

BORING B-1

CAUDILL, ROWLETT, SCOTT
+ BUTTERFIELD + ASSOCIATES
ASSOCIATED ARCHITECTS

Drawn by: 09886-G