

[illegible]


NOTES:

1. ALL PANELS SHALL BE CIRCUIT BREAKER TYPE. MULTIPLE-POLE BRANCH CIRCUITS SHALL BE COMMON TRIP TYPE.
2. ALL PANELS SHALL HAVE ENCLOSING DOOR WITH LOCK. ALL LOCKS TO BE KEYED ALIKE PROVIDE TYPED CIRCUIT DIRECTORY IN EACH DOOR
3. FLUSH MOUNTED PANELS SHALL BE INSTALLED IN EXISTING PANEL BOXES.
4. ALL BREAKERS AND PANELS SHOWN ARE BASED ON GENERAL ELECTRIC CO.
5. PROVIDE HANDLE LOCKING DEVICES FOR ALL BREAKERS CONTROLLING EMERGENCY LIGHTING.

[illegible][illegible]

NOTES:

1. LETTER INDICATES FIXTURE TYPE e.g. "A" - SEE "FIXTURE SCHEDULE"
2. COMBINATION OF LETTER & NUMBER INDICATES PANEL & CIRCUIT e.g. "A2" (PANEL "A" CIR *2)

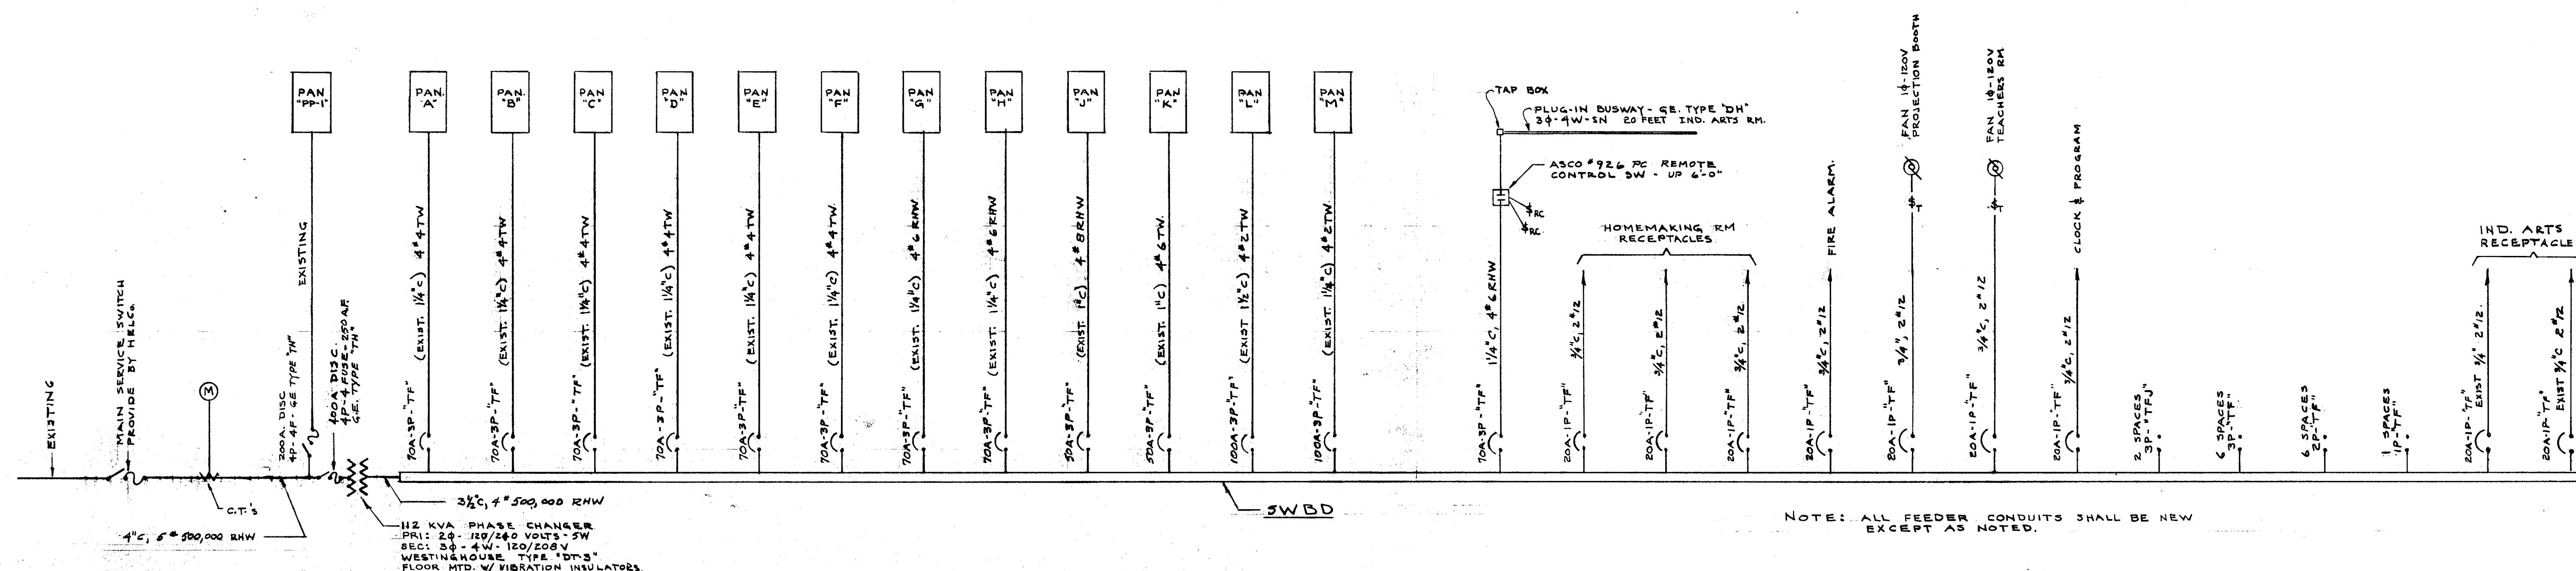

POWER RISER DIAGRAM

NO SCALE

VERIFY EXISTING
CONDITIONS AND
DIMENSIONS AT
BUILDING

CITY OF HARTFORD, CONNECTICUT DEPARTMENT OF ENGINEERING		
ELECTRICAL ALTERATIONS FOR RICHARD J. KINSELLA SCHOOL 42 CHARTER OAK AVE. HARTFORD CONN		
SUBMITTED <i>Raymond J. Benson</i>	RECOMMENDED <i>Demetrius T. Trivelp</i>	APPROVED <i>Robert H. Benson</i>
	CITY ARCHITECT	CITY ENGINEER
DESIGN <i>R.G.B.</i> DRAWN <i>R.G.B.</i>	DATEBOOK NO. 09773-E	
TRACED _____ CHECK _____	DATE APRIL 24, 1963	