
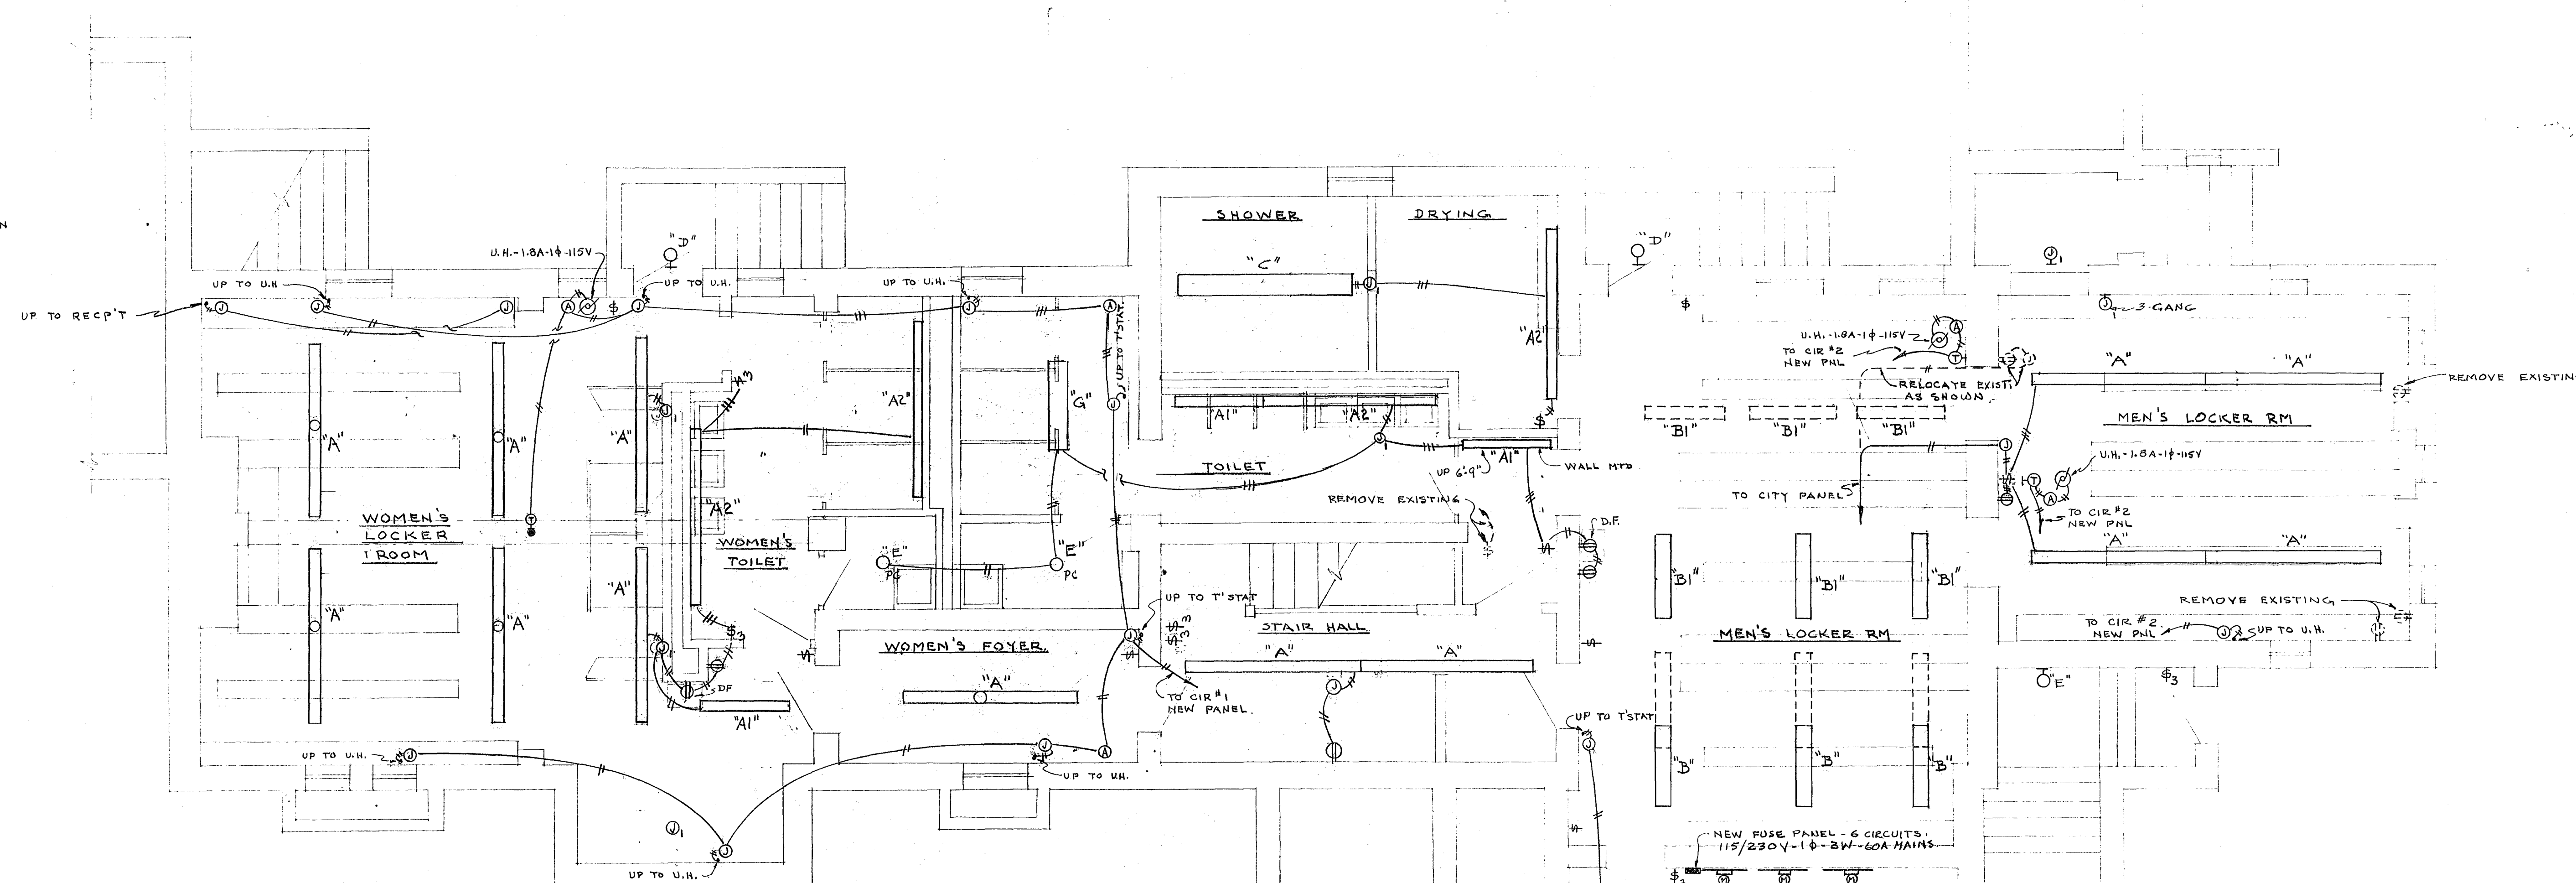




1. REMOVE ALL EXISTING LIGHTING FIXTURES EXCEPT AS INDICATED
2. PROVIDE NEW LIGHTING FIXTURES WHERE SHOWN
3. EXISTING WIRING TO REMAIN.
4. PROVIDE NEW WIRING AS INDICATED AND/OR REQUIRED. SURFACE RACEWAYS SHALL BE USED FOR NEW WIRING EXCEPT IN BOILER ROOM WHERE EMT SHALL BE USED. CONDUCTORS SHALL BE #12 TW MINIMUM.
7. PROVIDE NEW 4 CIRCUIT FUSE PANEL IN BOILER RM. AND CONNECT TO CITY METER. PANEL TO BE FOR NEW CIRCUITS.
8. PROVIDE NEW WIRING DEVICES (SWITCHES, RECEPTACLES) THROUGHOUT
9. REMOVE EXISTING RACEWAYS WHICH NO LONGER WILL BE USED DUE TO ALTERATIONS.
10. ALL EXISTING MOTORS, APPLIANCES, ETC. AND THEIR WIRING SHALL REMAIN.
11. ALL EXISTING METERS, PANEL & SERVICE EQUIPMENT SHALL REMAIN.



SCALE $\frac{1}{4}" = 1' - 0"$

SYMBOL LIST.	
SYMBOL	DESCRIPTION.
○	CEILING OUTLET.
	FLUORESCENT FIXTURE.
HO	WALL BRACKET.
①	JUNCTION BOX.
\$	SINGLE POLE SWITCH H&H #1991 UP 4'-6"
\$ ₃	THREE-WAY SWITCH H&H #1993 UP 4'-6"
	DUPLEX RECEPTACLE H&H #5262 UP 18"
	EXISTING FLUORESCENT FIXTURE.
○ _{PC}	CEILING OUTLET W/ PULL CHAIN FIXTURE.
—#—	INDICATES NEW WIRING
⊗	MOTOR - FURNISHED & INSTALLED BY OTHERS - WIRED BY ELEC. CONTR.
Ⓐ	AQUASTAT " " " " " " " " " "
HO ⊕	THERMOSTAT - FURNISHED BY OTHERS - INSTALLED & WIRED BY ELEC. CONTR. UP 5'-0"
\$ _{TP}	MANUAL MOTOR STARTER - " " " " " " " " " "
①	JUNCTION BOX - NEW
⓪	JUNCTION BOX - EXISTING
Ⓜ	MOTORIZED VALVE - FURNISHED & INSTALLED BY OTHERS - WIRED BY ELEC. CONTR.
Ⓣ	LOW TRANSFORMER - 1/2 4V - FURNISHED BY OTHERS - INSTALLED & WIRED BY ELEC. CONTR.
\$ _{OB}	OIL BURNER SWITCH - AH # 27062" - UP 5'-6"

<u>FIXTURE SCHEDULE</u>			
<u>TYPE</u>	<u>MANUFACTURER & CATALOG NO.</u>	<u>LAMPS</u>	<u>REMARKS</u>
A	LITHONIA # 8TUN 140 RS	TWO - F40 CW	CEILING MTD.
A1	LITHONIA # UN 140 RS	ONE - F40 CW	CEILING MTD. OR WALL MTD.
A2	LITHONIA # 8TUN 140 RS	TWO - F40 CW	WALL MTD -UP 6'-9"
D	EXISTING FIXTURE	TWO - F40 CW	RELOCATE AS SHOWN - PROVIDE NEW LAMP.
B1	" "	TWO - F40 CW	TO REMAIN AS IS - PROVIDE NEW LAMPS.
C	LITHONIA # 8TWA 240RH	FOUR - F40 CW	CEILING MOUNTED
D	STONCO # SG 61601	ONE - 100/1F	MOUNTED ON EXISTING OUTLET BOX
E	H&H # 827	ONE - 60/1F	BOX MOUNTED
F	H&H # 827	ONE - 100/1F	BOX MOUNTED
G	LITHONIA # UN 240	TWO - F40 CW	CEILING MOUNTED

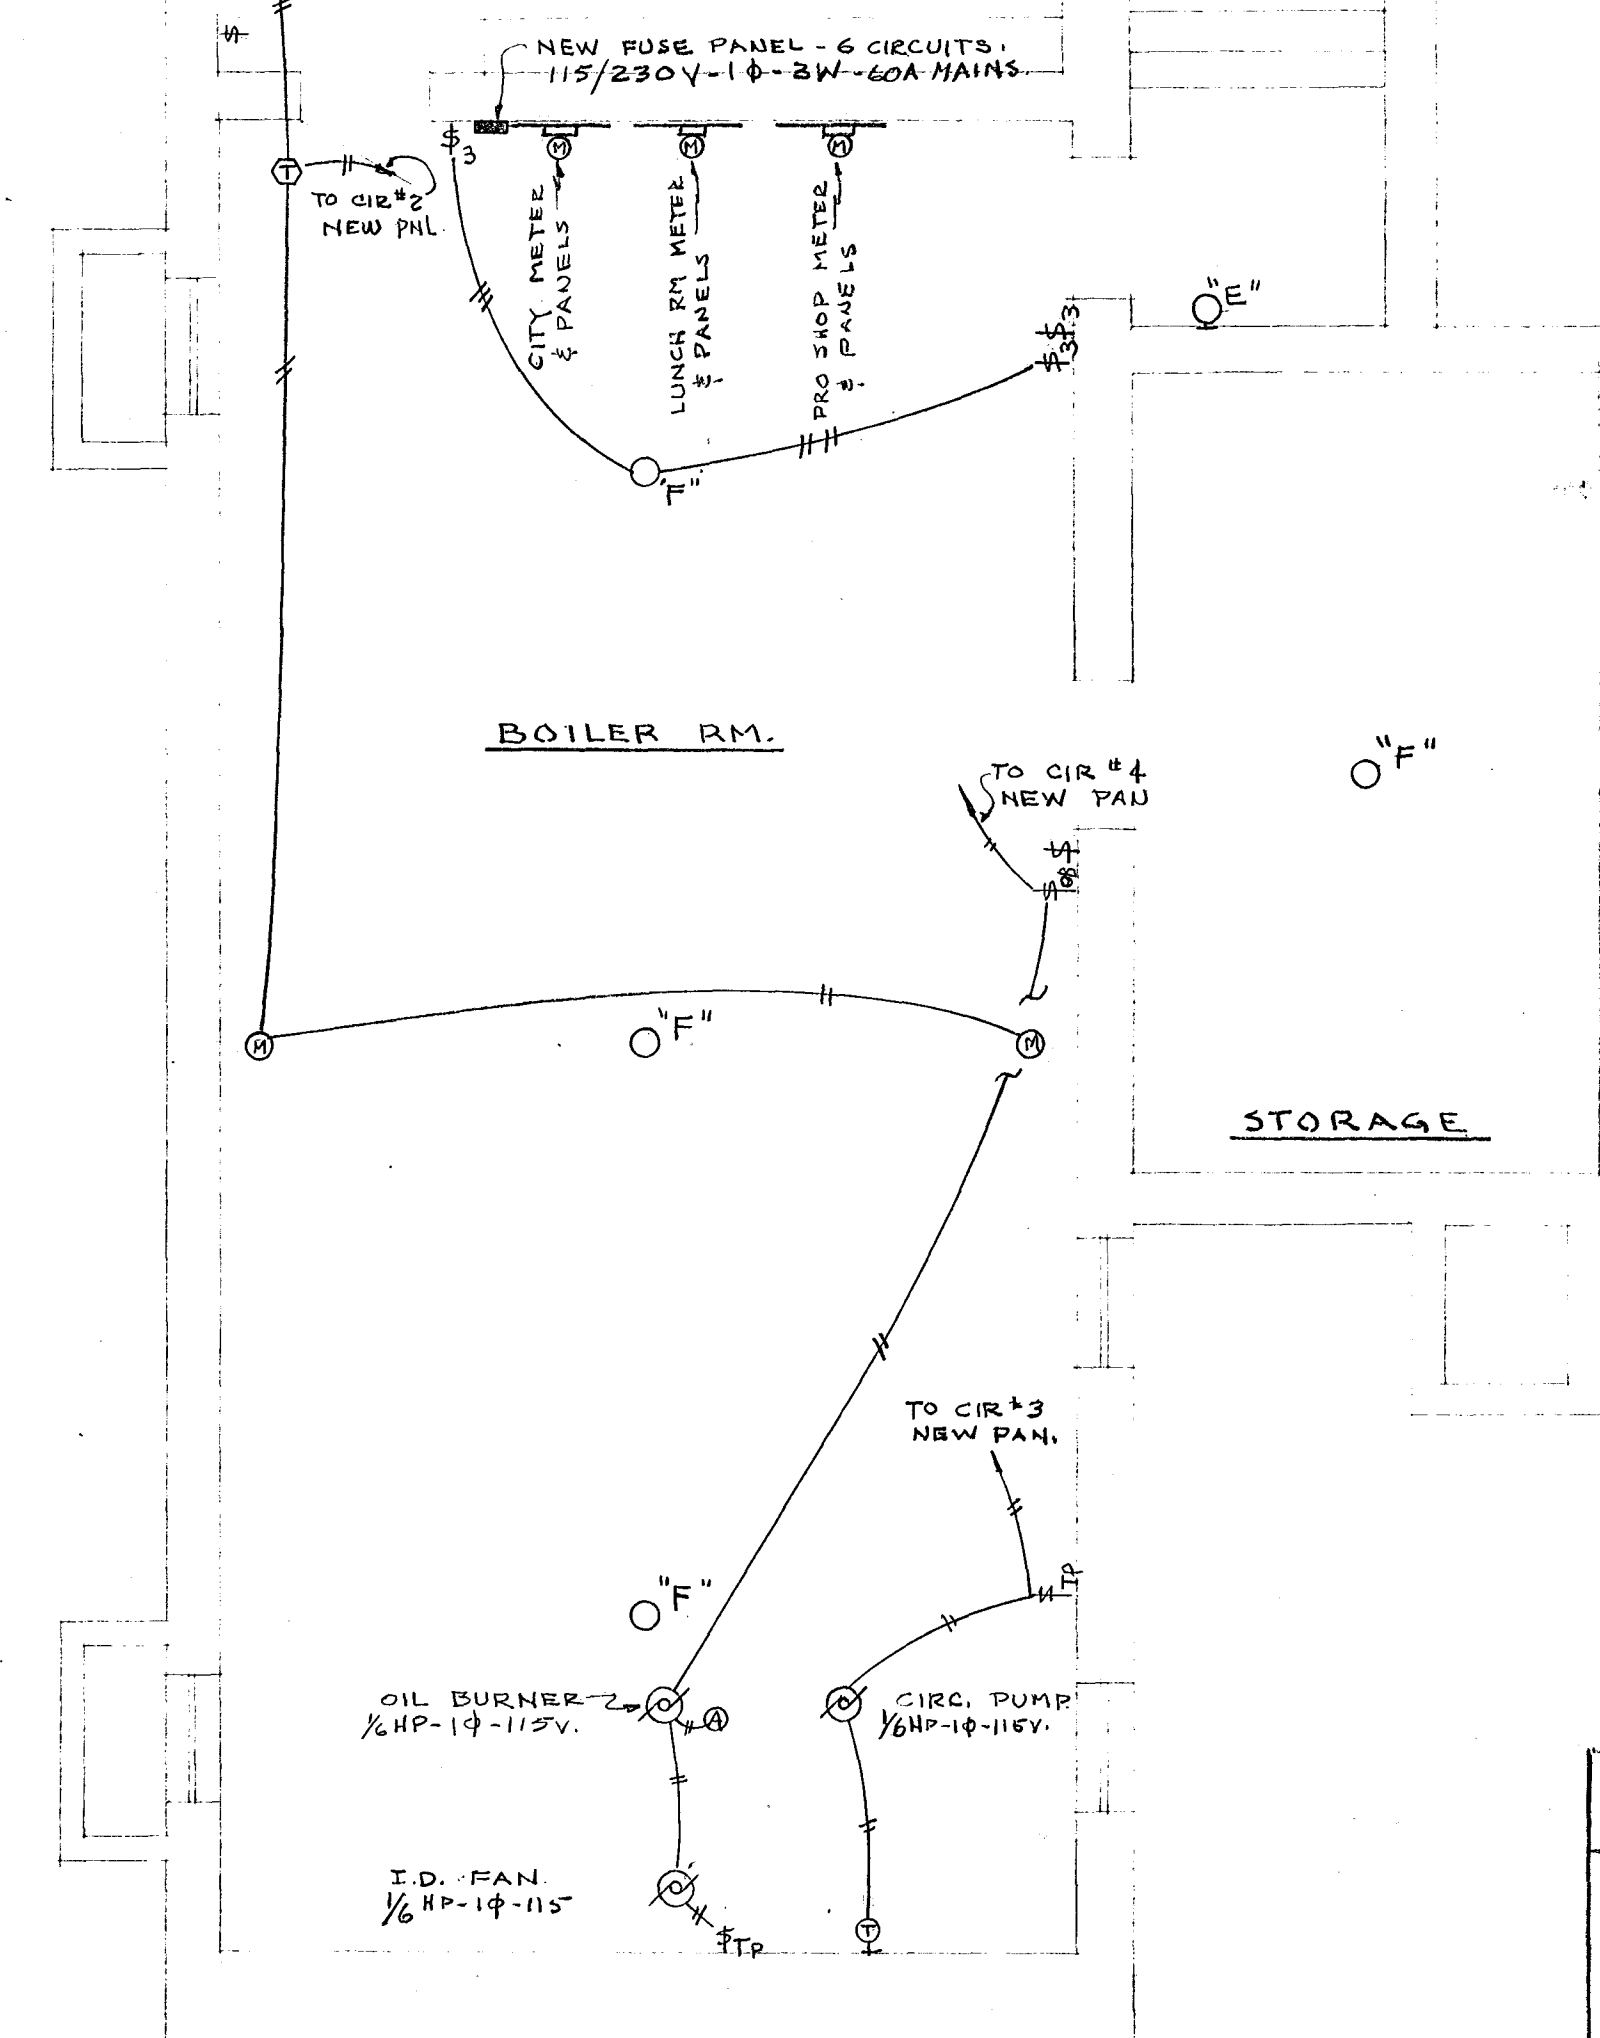

VERIFY EXISTING
CONDITIONS AND
DIMENSIONS AT
BUILDING

ELECTRICAL	E
------------	---

CITY OF HARTFORD, CONNECTICUT
DEPARTMENT OF ENGINEERING

ALTERATIONS TO

KENEY PARK CLUB HOUSE
WINDSOR CONNECTICUT

SUBMITTED	RECOMMENDED	APPROVED
11	11	11

<i>Raymond J. Bannon</i>	<i>Daniel J. Tesei</i>	<i>Peter H. Bannon</i>
CITY ARCHITECT	CITY ARCHITECT	CITY ENGINEER

DESIGN R.G.B. DRAWN R.G.B. DAYBOOK NO. 09943-G

TRACED _____ CHECK _____ DATE OCT. 31, 1966