


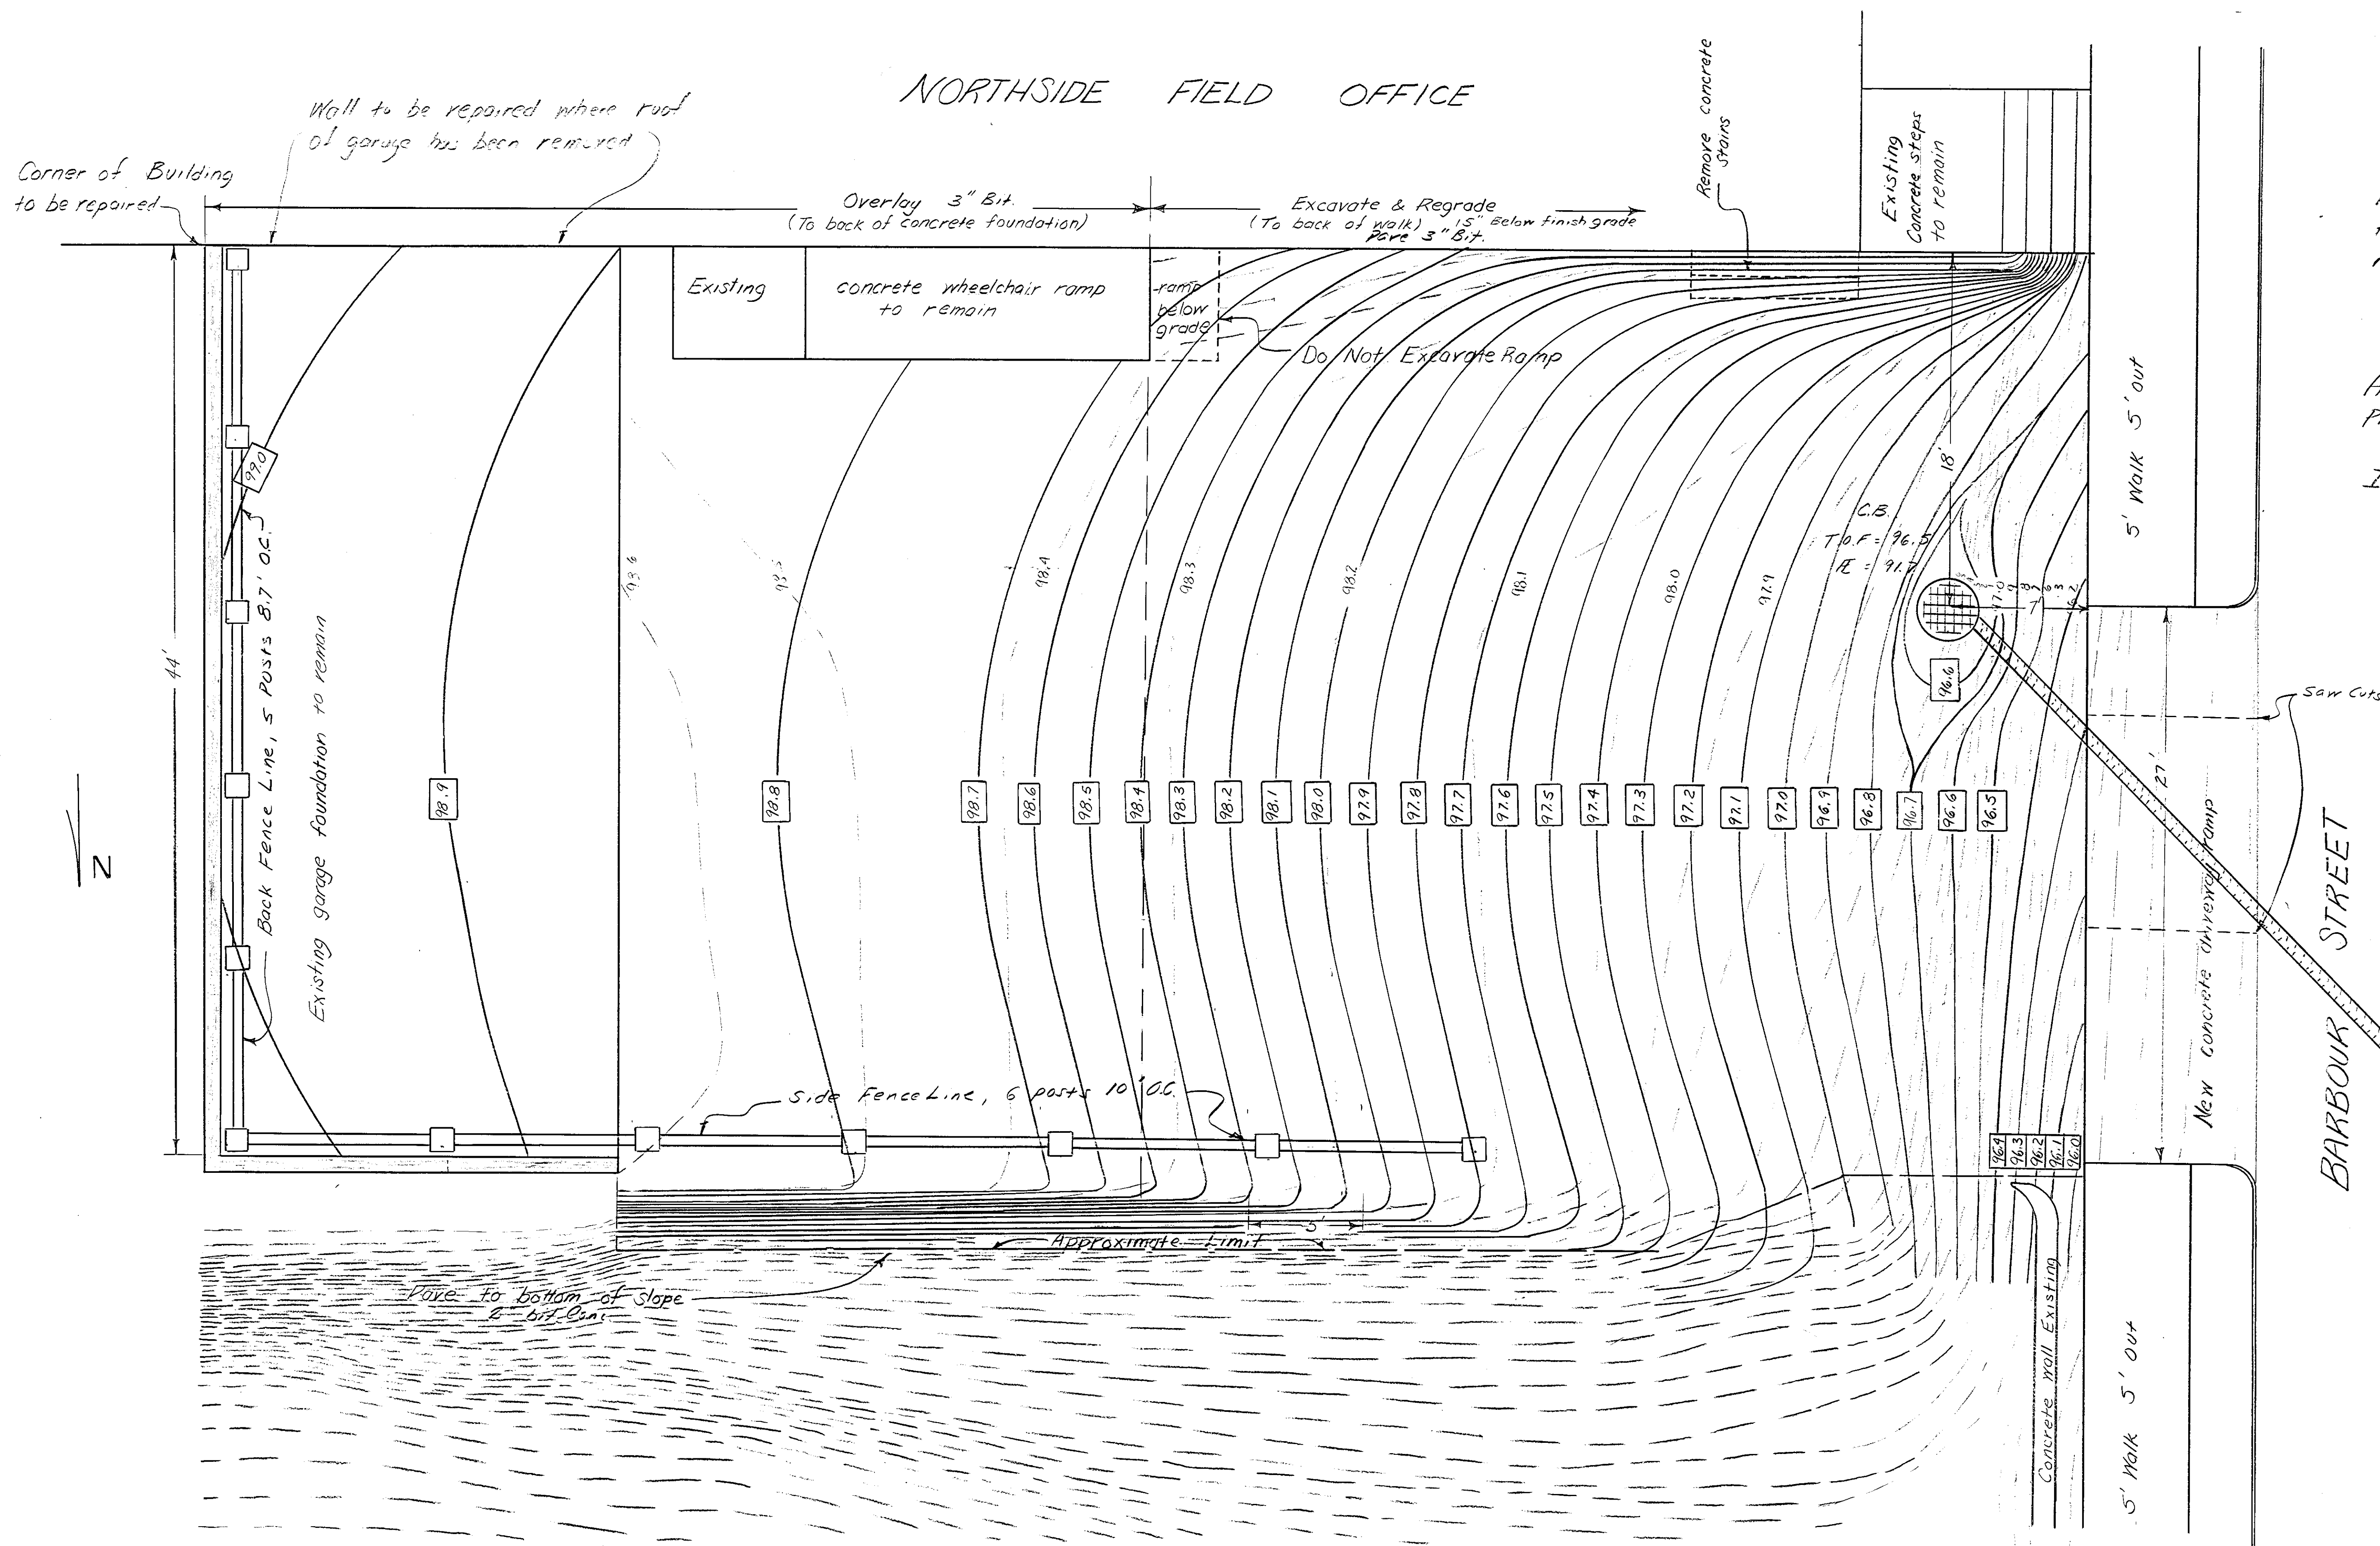

NOTES

New Catch Basin Elevation: Top of Frame - 96.50
Approximate Location:
18' From Bldg.
7' From Back of Walk.

All Grades Shown in Boxes are Proposed and assumed

Items of Work to be Done

- 1) Install Catch Basin and 10" PVC Drain Pipe
- 2) Remove Small Set of Steps
- 3) Excavate 1/2 of Parking lot to Limit shown and cover with 12" processed stone sub-base
- 4) Install Post & Beam Guardrail
- 5) Pave Lot with 1 1/2" Premixed base and 1 1/2" Surface Course
- 6) Install New 8" Reinforced Concrete Driveway Ramp
- 7) Repair Building

M.H.
T.O.F. = Existing Elev.
B.O.F. = 8.7' Below T.O.F.

MDC Elevations

	T.O.F.	B.O.F.
M.H.	80.70 ±	70.62 ±
C.B.	84.00 ±	79.20 ±

REVISIONS: 2/3/82
10/14/82

CITY OF HARTFORD, CONNECTICUT
DEPARTMENT OF PUBLIC WORKS
BUREAU OF ENGINEERING SERVICES

NORTHSIDE FIELD OFFICE

PARKING LOT IMPROVEMENTS

SUBMITTED Greenwood DIVISION ENGINEER	RECOMMENDED James E. Long CHIEF OF ENG. SERV.	APPROVED James E. Long ASST. DIR. & CIV. ENG.
DRAWN W.J.K.	SCALE 1" = 4'	DAYBOOK NO. 010792
CHECKED		DATE 5/5/82

Notebook #909