
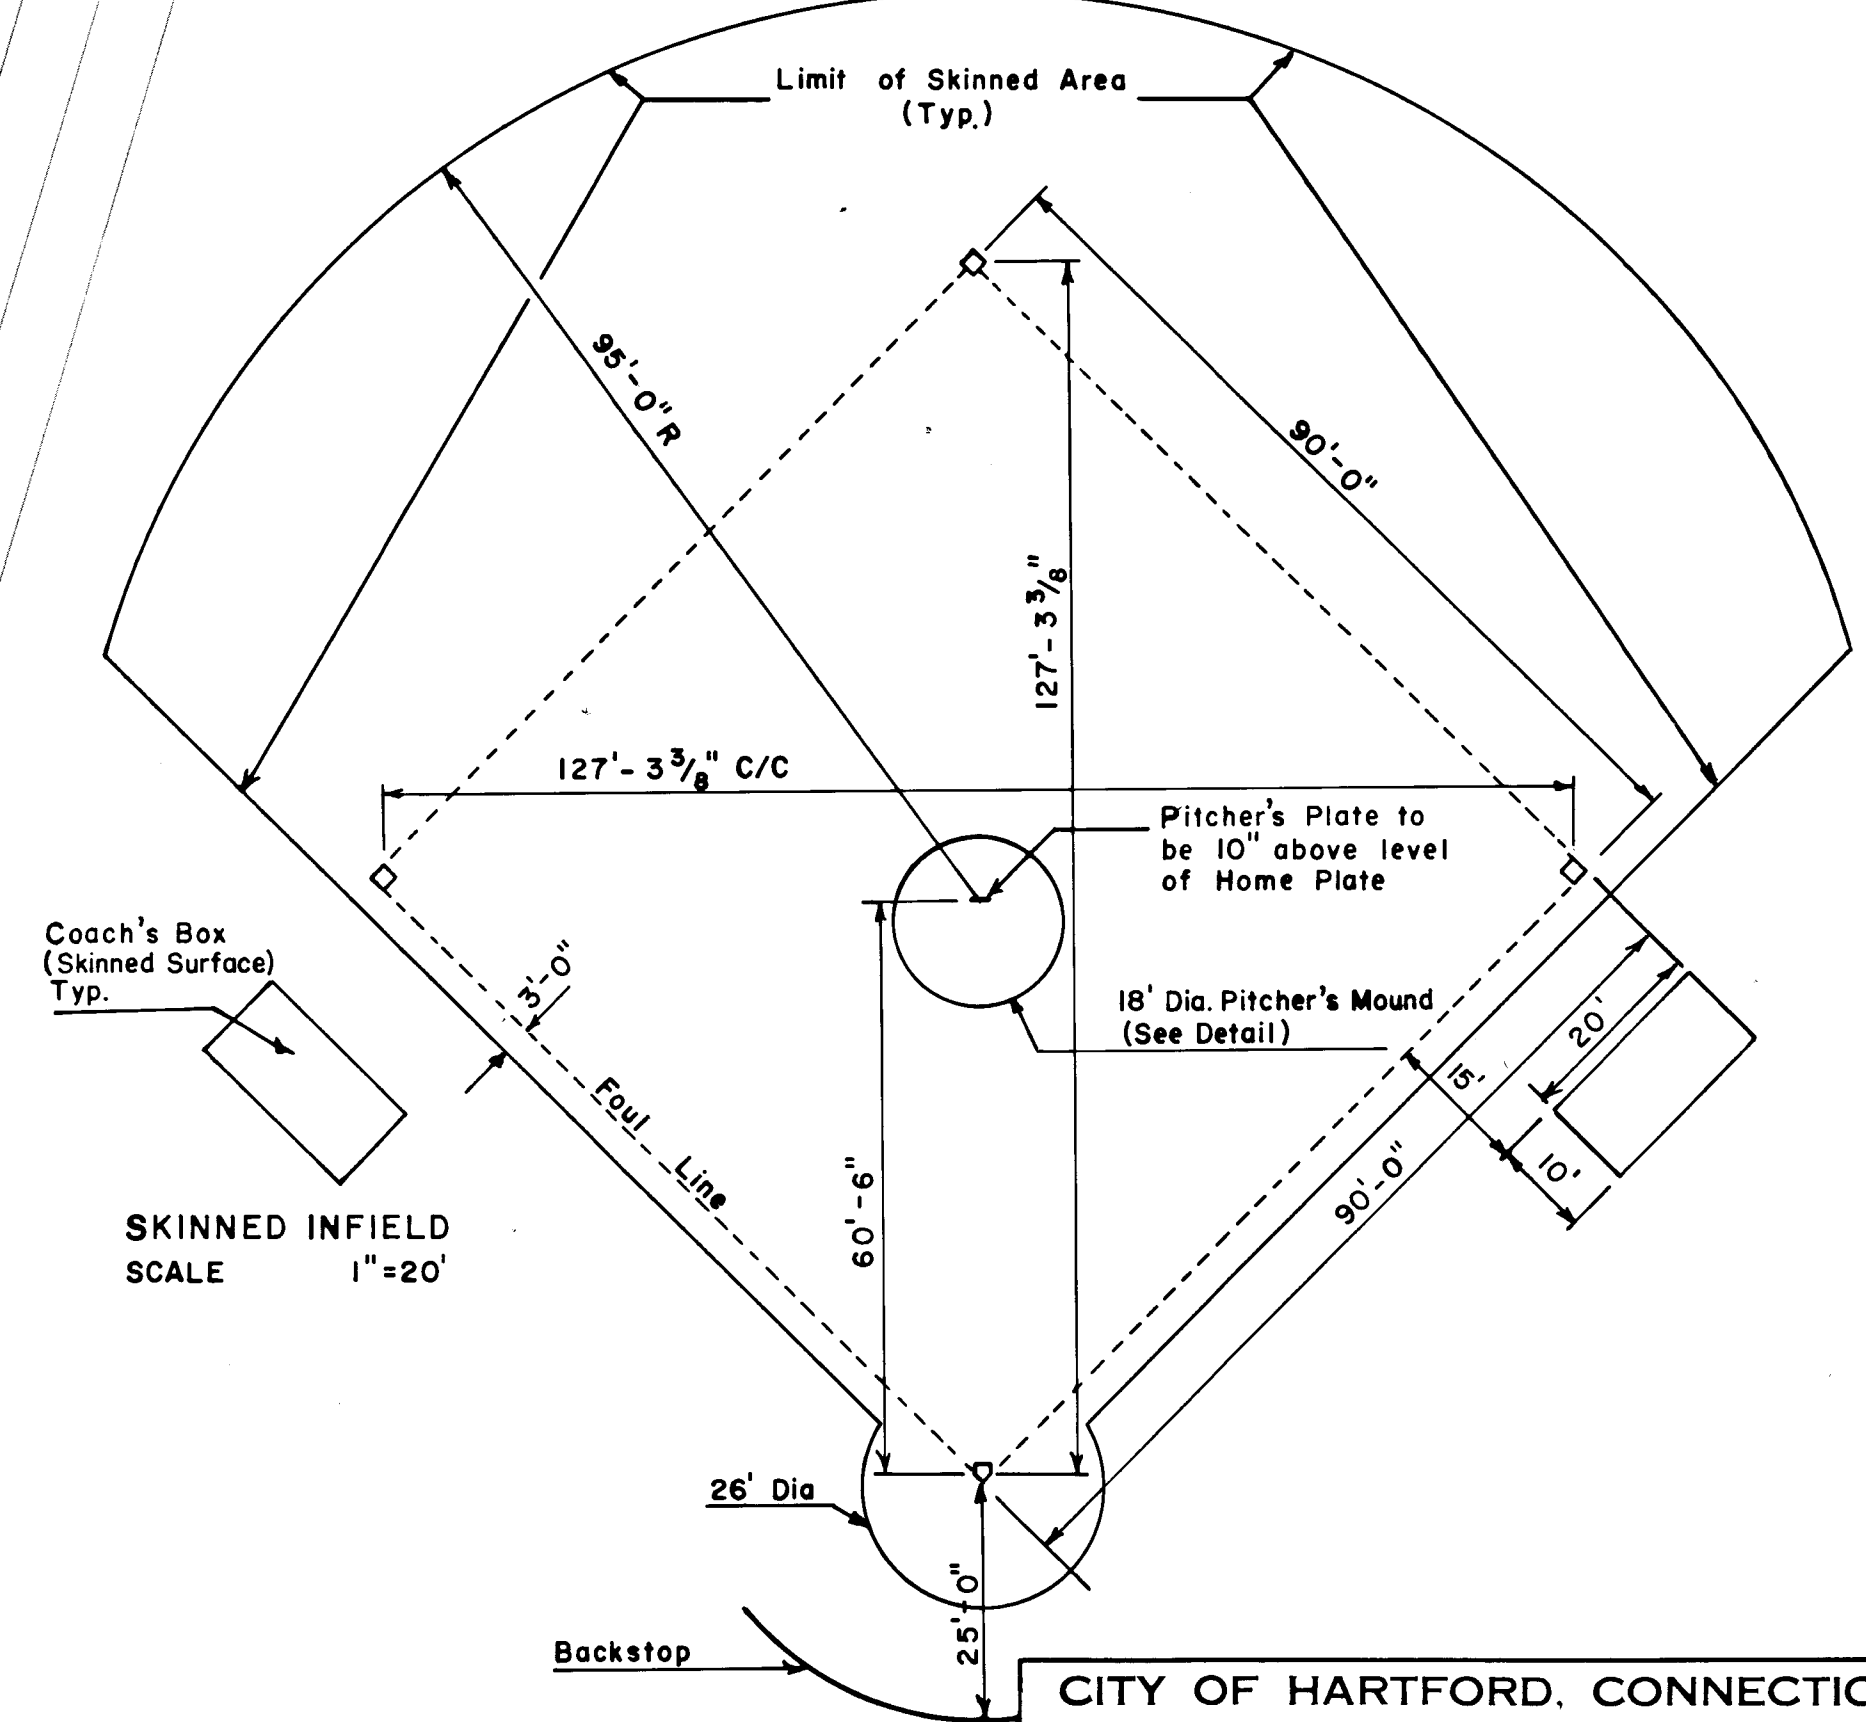
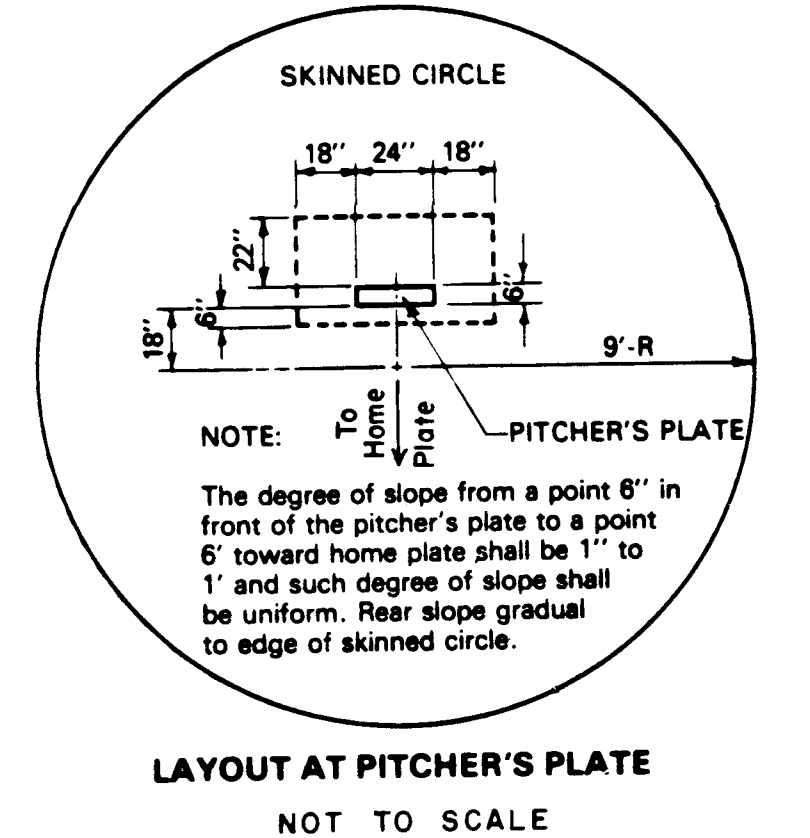


1 86/553

1 86/553

1 86/553

1 86/553

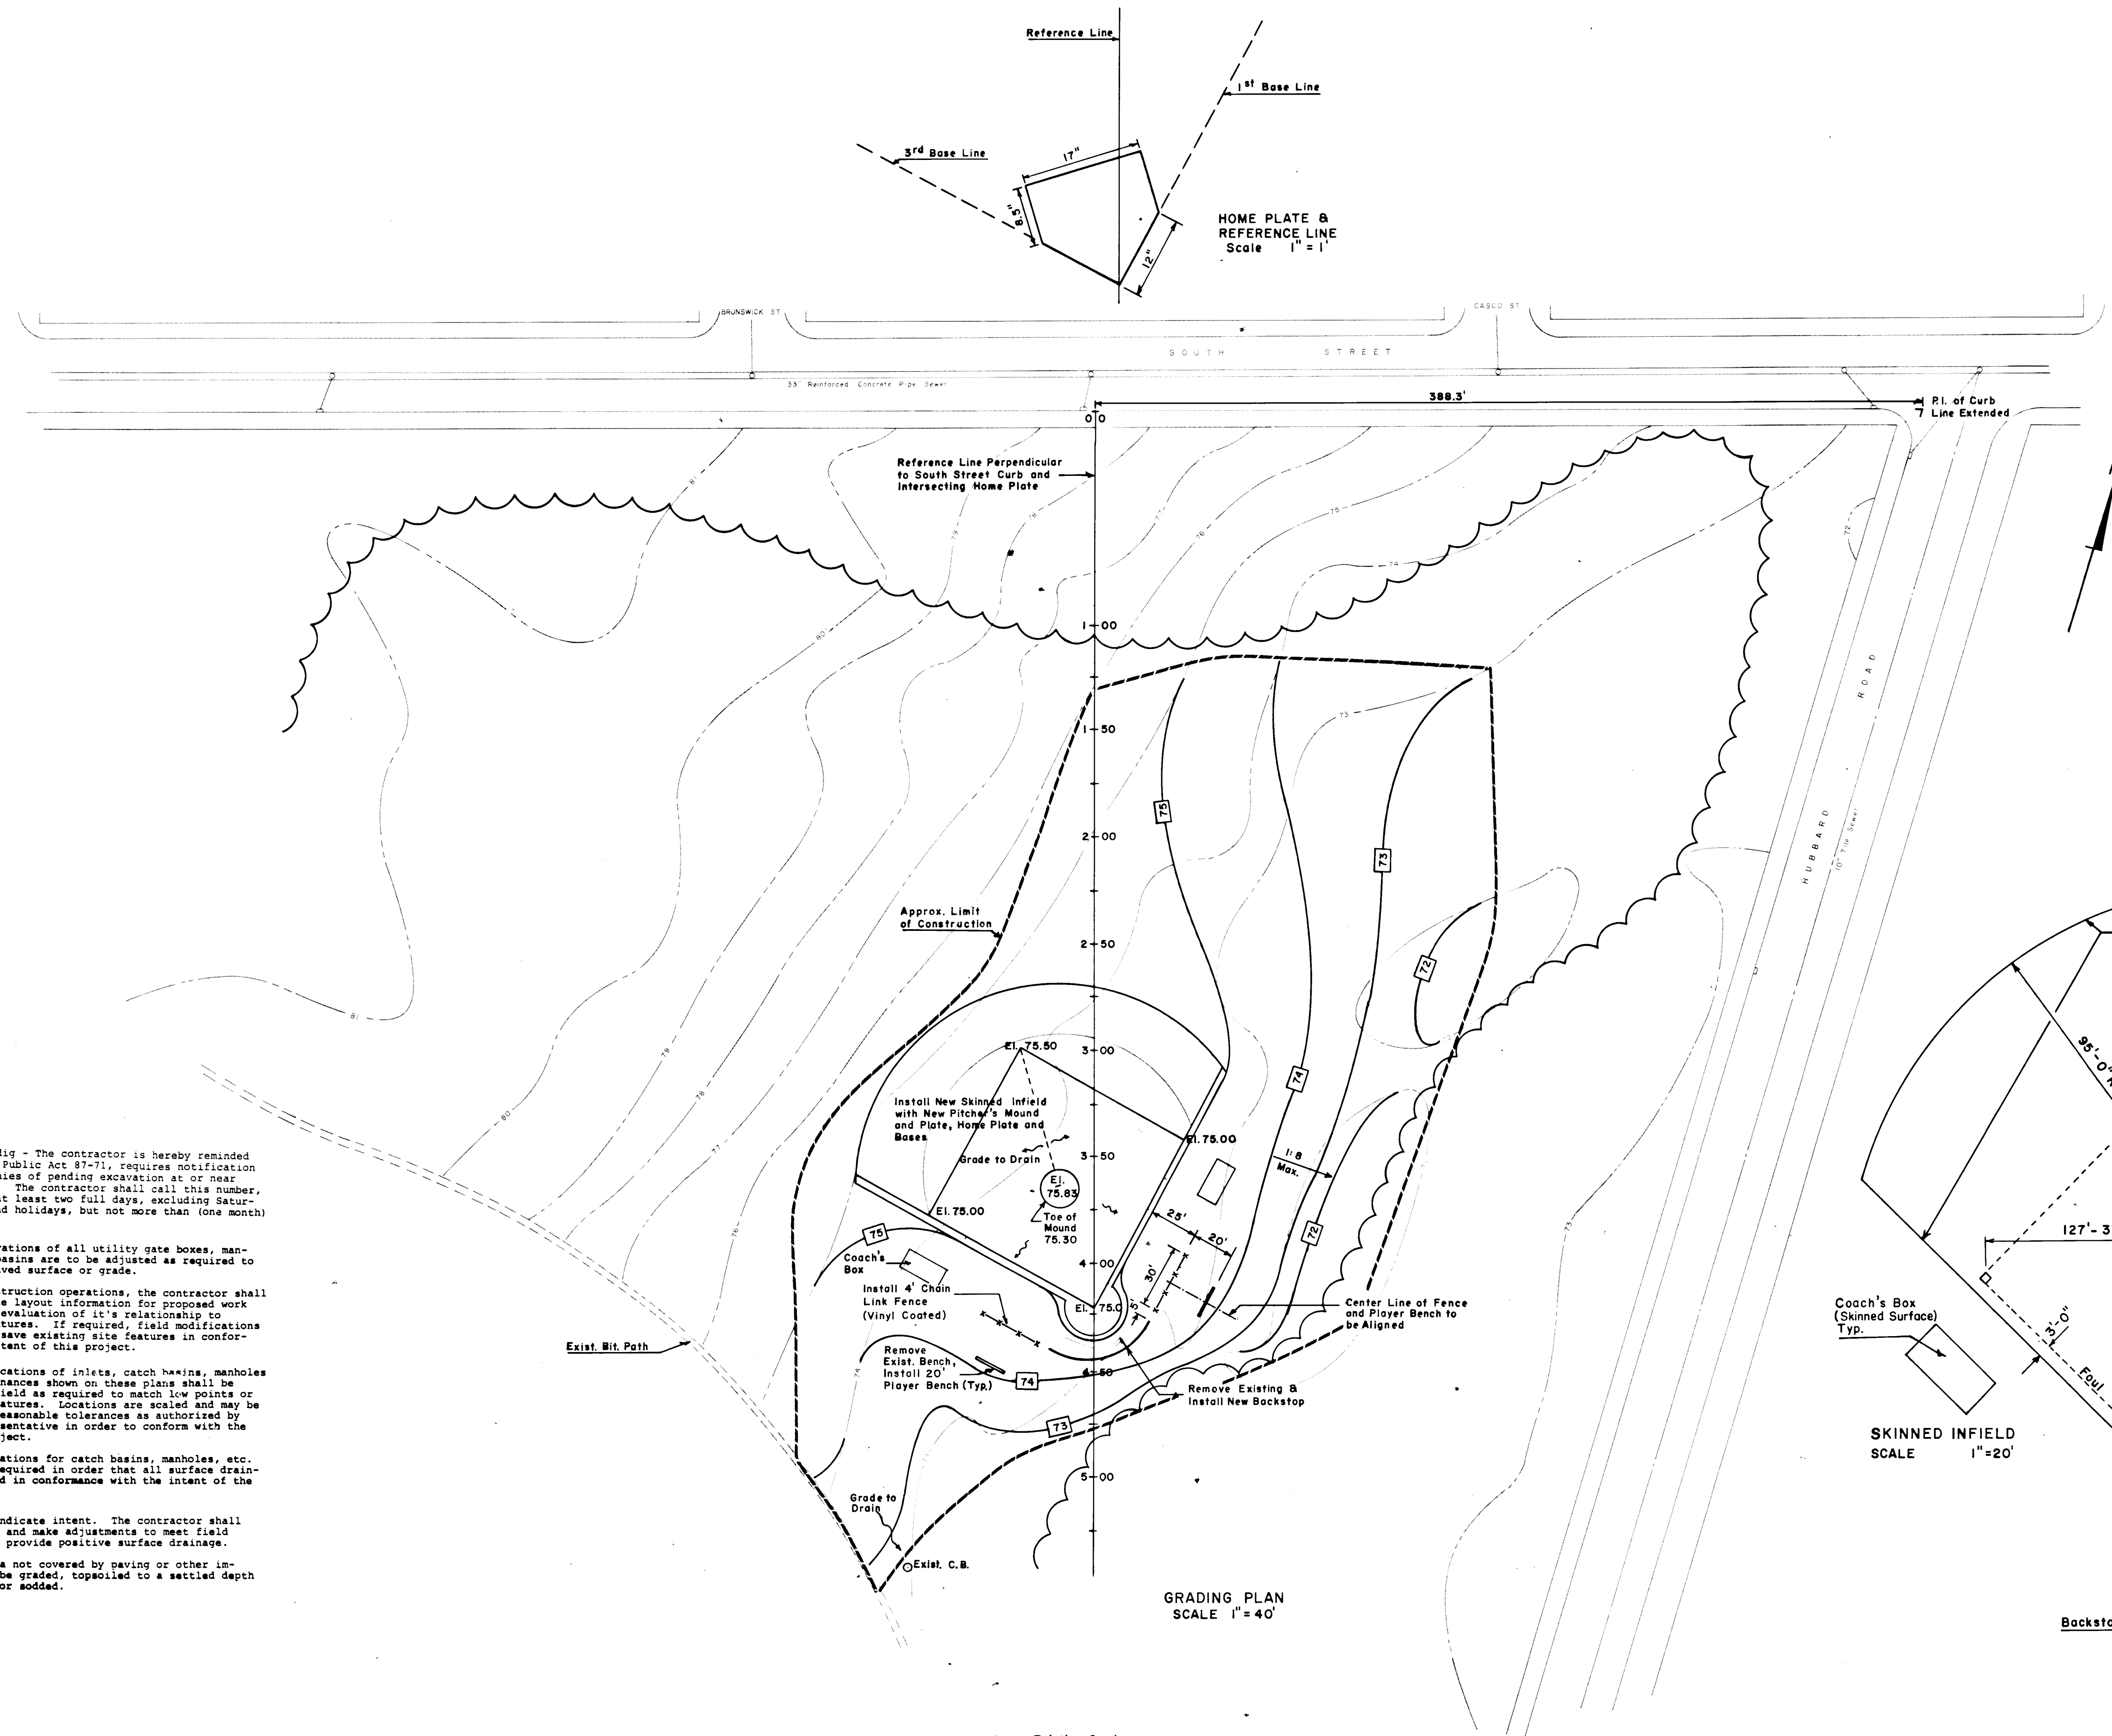

1. Call before you dig - The contractor is hereby reminded that pursuant to Public Act 87-71, requires notification to utility companies of pending excavation at or near public utilities. The contractor shall call this number, 1-800-922-4455, at least two full days, excluding Saturdays, Sundays and holidays, but not more than (one month) thirty days.
2. Rim or frame elevations of all utility gate boxes, manholes and catch basins are to be adjusted as required to match finished paved surface or grade.
3. Prior to any construction operations, the contractor shall establish adequate layout information for proposed work to allow for the evaluation of it's relationship to existing site features. If required, field modifications shall be made to save existing site features in conformance with the intent of this project.
4. The horizontal locations of inlets, catch basins, manholes and other appurtenances shown on these plans shall be adjusted in the field as required to match low points or other finished features. Locations are scaled and may be adjusted within reasonable tolerances as authorized by the owner's representative in order to conform with the intent of the project.
5. Top of frame elevations for catch basins, manholes, etc. shall be set as required in order that all surface drainage is intercepted in conformance with the intent of the grading shown.
6. Proposed grades indicate intent. The contractor shall verify elevations and make adjustments to meet field conditions and to provide positive surface drainage.
7. All disturbed area not covered by paving or other improvements shall be graded, topsoiled to a settled depth of 6" and seeded or sodded.

--- Existing Grade
--- Proposed Grade
--- Tree Line

Approved
Bernard J. ... 5-29-90
Director

SHEET
8 OF 11

CITY OF HARTFORD, CONNECTICUT DEPARTMENT OF PUBLIC WORKS BUREAU OF ENGINEERING SERVICES		
BASEBALL FIELD IMPROVEMENTS AT GOODWIN PARK		
SUBMITTED <i>Robert H. ...</i> PROJECT ENGINEER	RECOMMENDED <i>James E. ...</i> DIVISION MANAGER	APPROVED <i>William P. ...</i> CITY ENGINEER
DRAWN RDS	SCALE AS NOTED	DAYBOOK NO. 011203 H
CHECKED	DATE MAY 1990	