

CP-63C MIDDLETOWN QUAD, FILE
CONNECTICUT GEODETIC SURVEY
NEW HAVEN, CONN.

#14-443.

DISTANCES AND DIRECTIONS TO REFERENCE MARKS

COMP. VOL. 101

STATION NO.: 2609

TOWN: Hartford

COUNTY: Hartford

DATE: Mar. 8, 1940

OBJECT	DIST. FT.	DIRECTION	PLANE AZIMUTH
Moh. #2608	744.88	0 00 00	0 0 0
R.M. #1	36.00	125 41 00	330 48 49.8
R.M. #2	14.48	318 57 00	
R.M. #3	35.62	345 53 00	

STATION MARK IS U.S.C. & G.S. & STATE SURVEY BRONZE DISK
STAMPED: 2609, set in the top of a reinforced concrete

post, the top flush with the ground.


The station is on the west side of Conn. #9 (Wethersfield Avenue) and north of Bolton Street at the northwest corner of their intersection in Hartford. It is in the grassed plot, between the sidewalk and the driveway to the Sunoco Service Station, 4 feet west of west edge of the sidewalk on Wethersfield Avenue, and 16 feet northwest of the fire alarm box at the corner of Bolton Street.

R.M. #1: Northwest of station; The southeast corner of the south gas pump in front of the service station on the west side of the highway.

R.M. #2: Southeast of station; the northwest corner of the iron grating over a catch basin, at the northwest corner of Wethersfield Avenue and Bolton Street.

R.M. #3: Southeast of station; The center of a S.N.E.T. Co. iron manhole cover, at the center line intersection of Wethersfield Avenue and Bolton Street.

PLANE COORDINATES (FEET)	ELEVATION
X 621,805.34	FEET:
Y 326,883.74	METERS:

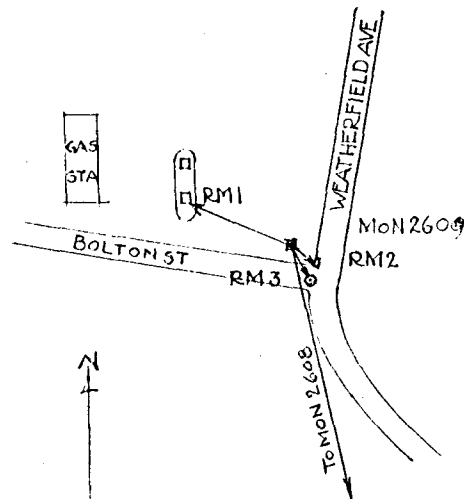

September 1959

022-35