


Asphalt Edge of Header to be 12.4 ft
from Curbor Approximately 2 ft from Rail

Note: Concrete in Header to be
of 1-3-6 Mixture, to be built of
Same Materials and at same Time
as Base for Pavement

3"x3" Strip to be held in Place
by Cleat nailed to Plank on
Opposite Side of Header

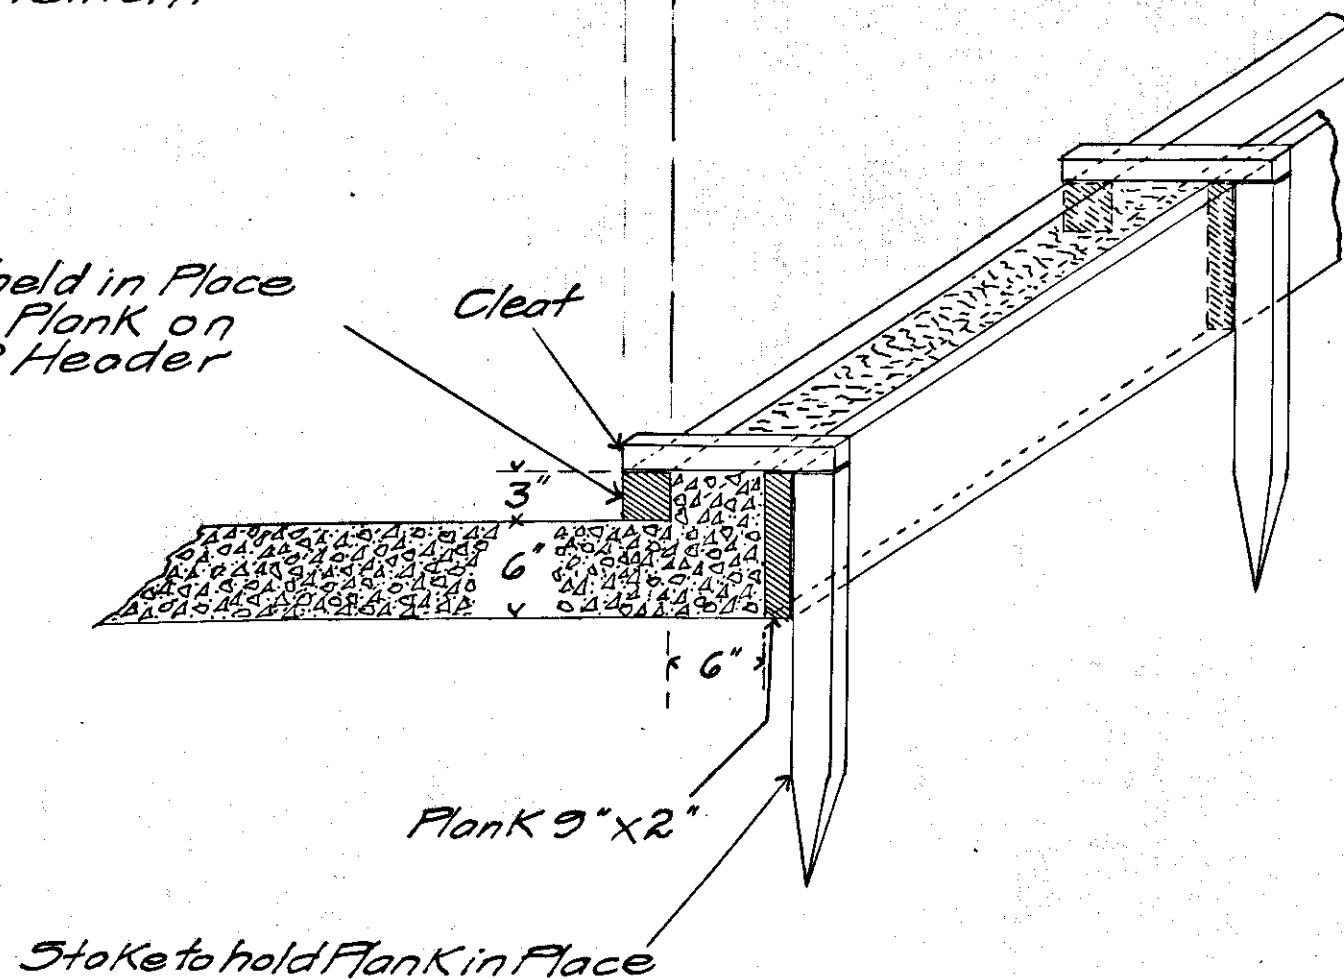

Department of Engineering
Hartford Conn.
Day Book No. 04579

Sketch
Showing Typical Details
For
Concrete Header
Windsor Avenue