


NOTES:

STEEL FRAMING —
 CENTER LINE OF ALL EXTERIOR WALL COLUMNS OR RANGERS TO BE SET IN 0 FROM FACE OF WALL UNLESS OTHERWISE NOTED.
 STEEL BEAMS IN EXTERIOR WALLS SHALL BE OFF SET ON COLUMNS SO THAT THE OUTSIDE EXTREMITY OF THEIR OUTER FLANGE IS 4" FROM EXTERIOR FACE OF WALL.
 CENTER LINE OF ALL VERTICAL TRUSS MEMBERS LOCATED ALONG EXTERIOR WALLS SHALL BE SET IN 0 FROM FACE OF WALL INCLUDING RESPECTIVE END COLUMNS AS NOTED ON PLANS. DIMENSIONS ON 1/4" SCALE PLANS.
 DIMENSIONS ARE TAKEN TO THE FOLLOWING POINTS:
 (A) CENTER OF COLUMN.
 (B) EXTERIOR FACE OF BUILDING.
 (C) FACE OF ROUGH MASURK.
 (D) FACE OF VERTICAL FURRING IN BACK OF PLASTER FIN.
 (E) OUTSIDE OF METAL-PLATE PARTITION IN BACK OF PLASTER FIN.
 FIREPROOFING —
 STRUCTURAL COLUMNS IN STACK AREA TO BE ENCASED IN VERMICULITE PLASTER. REMAINING COLUMNS ENCASED IN 2" MIN. CONG. COLUMNS IN SHIPPING AREA, SHIPPING EXTENSION, CARPENTRY, BINDING & MENDING, AND STACK AREA TO HAVE STEEL ANGLES 4x4x1/2" 6" HIGH AS CORNER GUARDS.
 CABINETS —
 CABINETS, COUNTERS, ETC. MARKED (C) ON PLANS ARE INCLUDED IN CONTRACT. CABINETS, COUNTERS, ETC. NOT SO INDICATED, DETAILED OR SPECIFIED, ARE NOT INCLUDED IN CONTRACT.
 PARTITIONING —
 UNLESS OTHERWISE SHOWN, PARTITIONING EXISTING IS 2" MIN. UP TO 8' OF THE FOLLOWING WIDTHS:
 1. EXTERIOR WALL BRICK 8" MIN. TURNING AT CORNERS WITH METAL STUDS.



BASEMENT PLAN
 SCALE 1/8" = 1'-0"

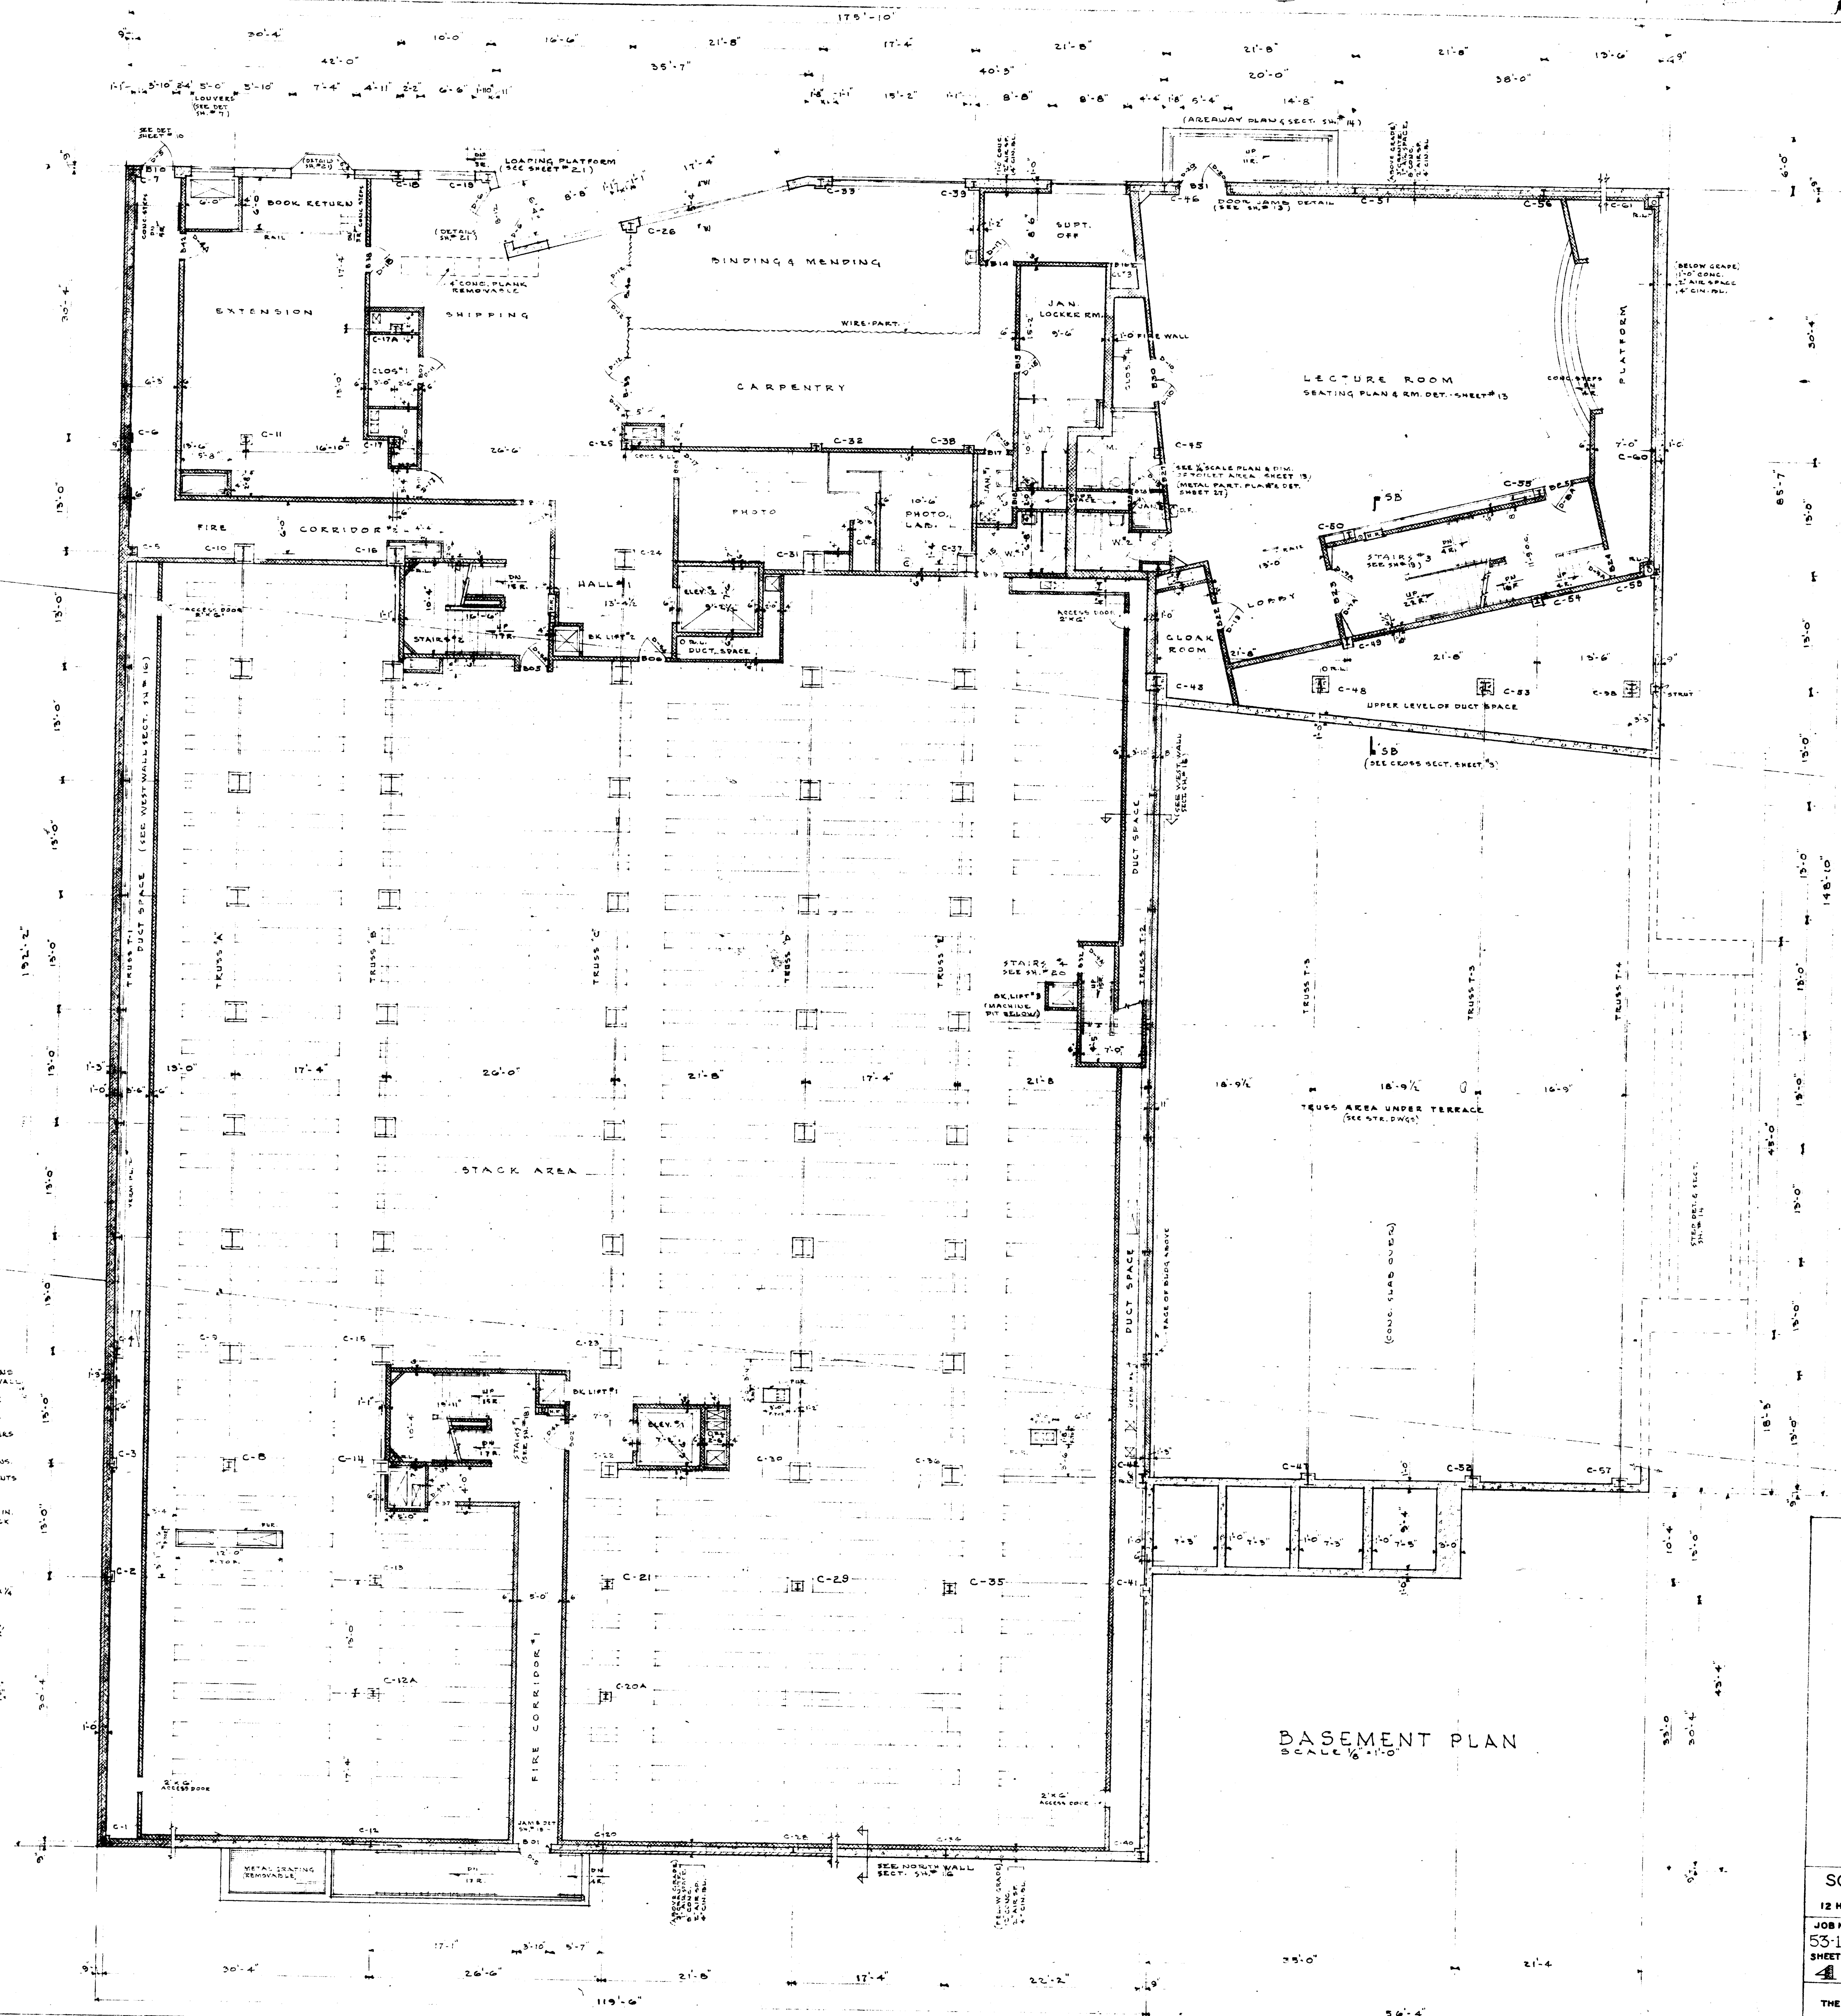

SCHULTZ & GOODWIN
 ARCHITECTS
 12 HAYNES STREET, HARTFORD, CONN.
 JOB NO. DATE: 6/15/54
 531A DRAWN BY: J.G.G.
 SHEET NO. TRACED BY: J.G.G.
 CHECKED BY: J.G.G.
 BUILDING FOR
 THE HARTFORD PUBLIC LIBRARY
 CITY OF HARTFORD - OWNER