

PLANT MATERIAL LIST

ITEM	QUAN.	BOTANICAL NAME	COMMON NAME	CALIPER	BRANCH HEIGHT	TOTAL HEIGHT	FRUIT COLOR	CANES PER PLANT	ROOTS	DIA. OF BALL
1.	2	<i>Liquidambar styraciflua</i>	Sweet Gum	3"-3 1/2"	7'	14'-16'	Brown Bark	1	3/8"	36"
2.	2	<i>Morus nigra</i>	Black Mulberry	1 1/2"-2"	6'	8'-10'	Red	1	3/8"	24"
3.	82	<i>Yucca cordifolia densiflora</i>	Dense Japanese Yucca	2'-2 1/2' 3rd.			Red	2/8"	2 1/8"	12"


FURNITURE LIST

ITEM	NAME	QUANTITY	MODEL	MANUFACTURER OR EQUAL	REMARKS
1.	Cast Stone Bench (6' long)	7	No. 448	Kenneth Lynch Plastics, Inc.	Neutral Color
2.	Cast Stone Bench (8' long)	2	No. 448	Kenneth Lynch Plastics, Inc.	Neutral Color


1. All areas located within the Contract Limit Line not otherwise shown, to be covered with suitable permanent surfacing or planting beds, or that are in any way disturbed by the grading or construction materials of this contract shall be filled with Merion Blue-grass seed.
2. Planting bed for shrub hedge shall be prepared to a depth of 18 inches by 36 inches wide and back-filled with approved clean friable agricultural topsoil and dressed with 4 inches of Garden Bark as manufactured by Weyerhaeuser Company or equal using regular size particles.
3. Topsoil or new sodded areas shall be not less than 6 inches deep.
4. Pits for new trees shall be dug at least 6 inches deeper than the depth of the ball and 24 inches wider than the diameter.

GENERAL NOTES AND SPECIFICATIONS

5. All planting of trees, shrubs and sodding shall be done in accordance with the standard practices of the Trade including application of lime and fertilizer to the topsoil all as is recommended by the American Nurseryman's Association.
6. All plant material shall comply with and be handled in accordance with specifications and instructions as set forth in the American Standard for Nursery Stock publication as currently approved by the American Standards Association, Inc.
7. Install all paved areas with not less than 2% percent drainage slope toward the existing street curbs to insure a positive surface drainage.
8. All newly planted trees 3 inches or larger in caliper shall be triple-guyed and secured to stakes, banded and mulched with regular grade Garden Bark as manufactured by Weyerhaeuser Company, Inc. or equal to a depth of 9 inches.
9. Caliper measurements of trees to be taken not less than 6 inches above the natural grade level of the trunk.
10. All plant material to be root-pruned nursery grown stock in a vigorous, healthy growing condition free of disease, infestation and damage.
11. All plant material must be inspected and tagged by the City Landscape Architect before delivery to the site.
12. Remove all existing paving located within the Contract Limit Line from the site.
13. Dismantle existing chain link fence located along the street line, circumventing the entire Park area, approximately 310' linear feet, and store as directed by the City Landscape Architect at the City Park Maintenance Yard.

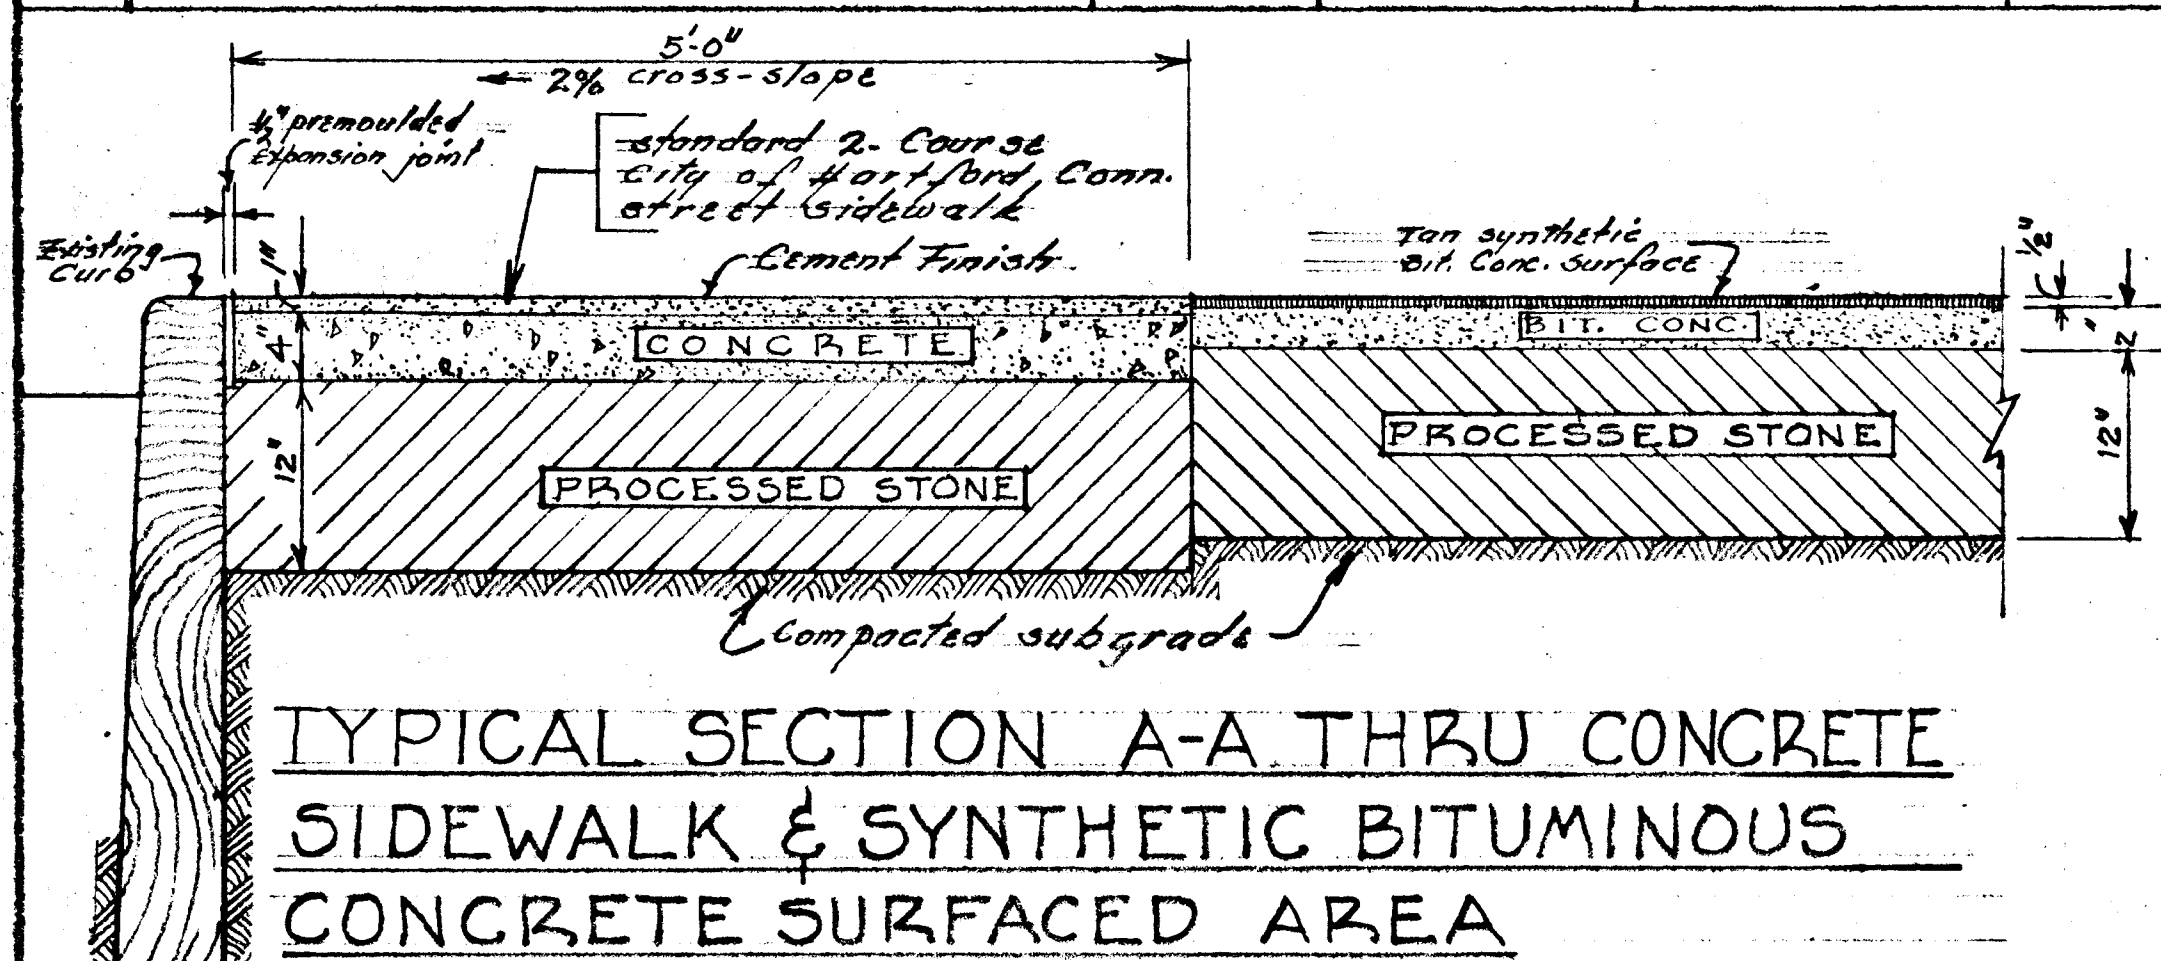

SCALE 1" = 1'-0"

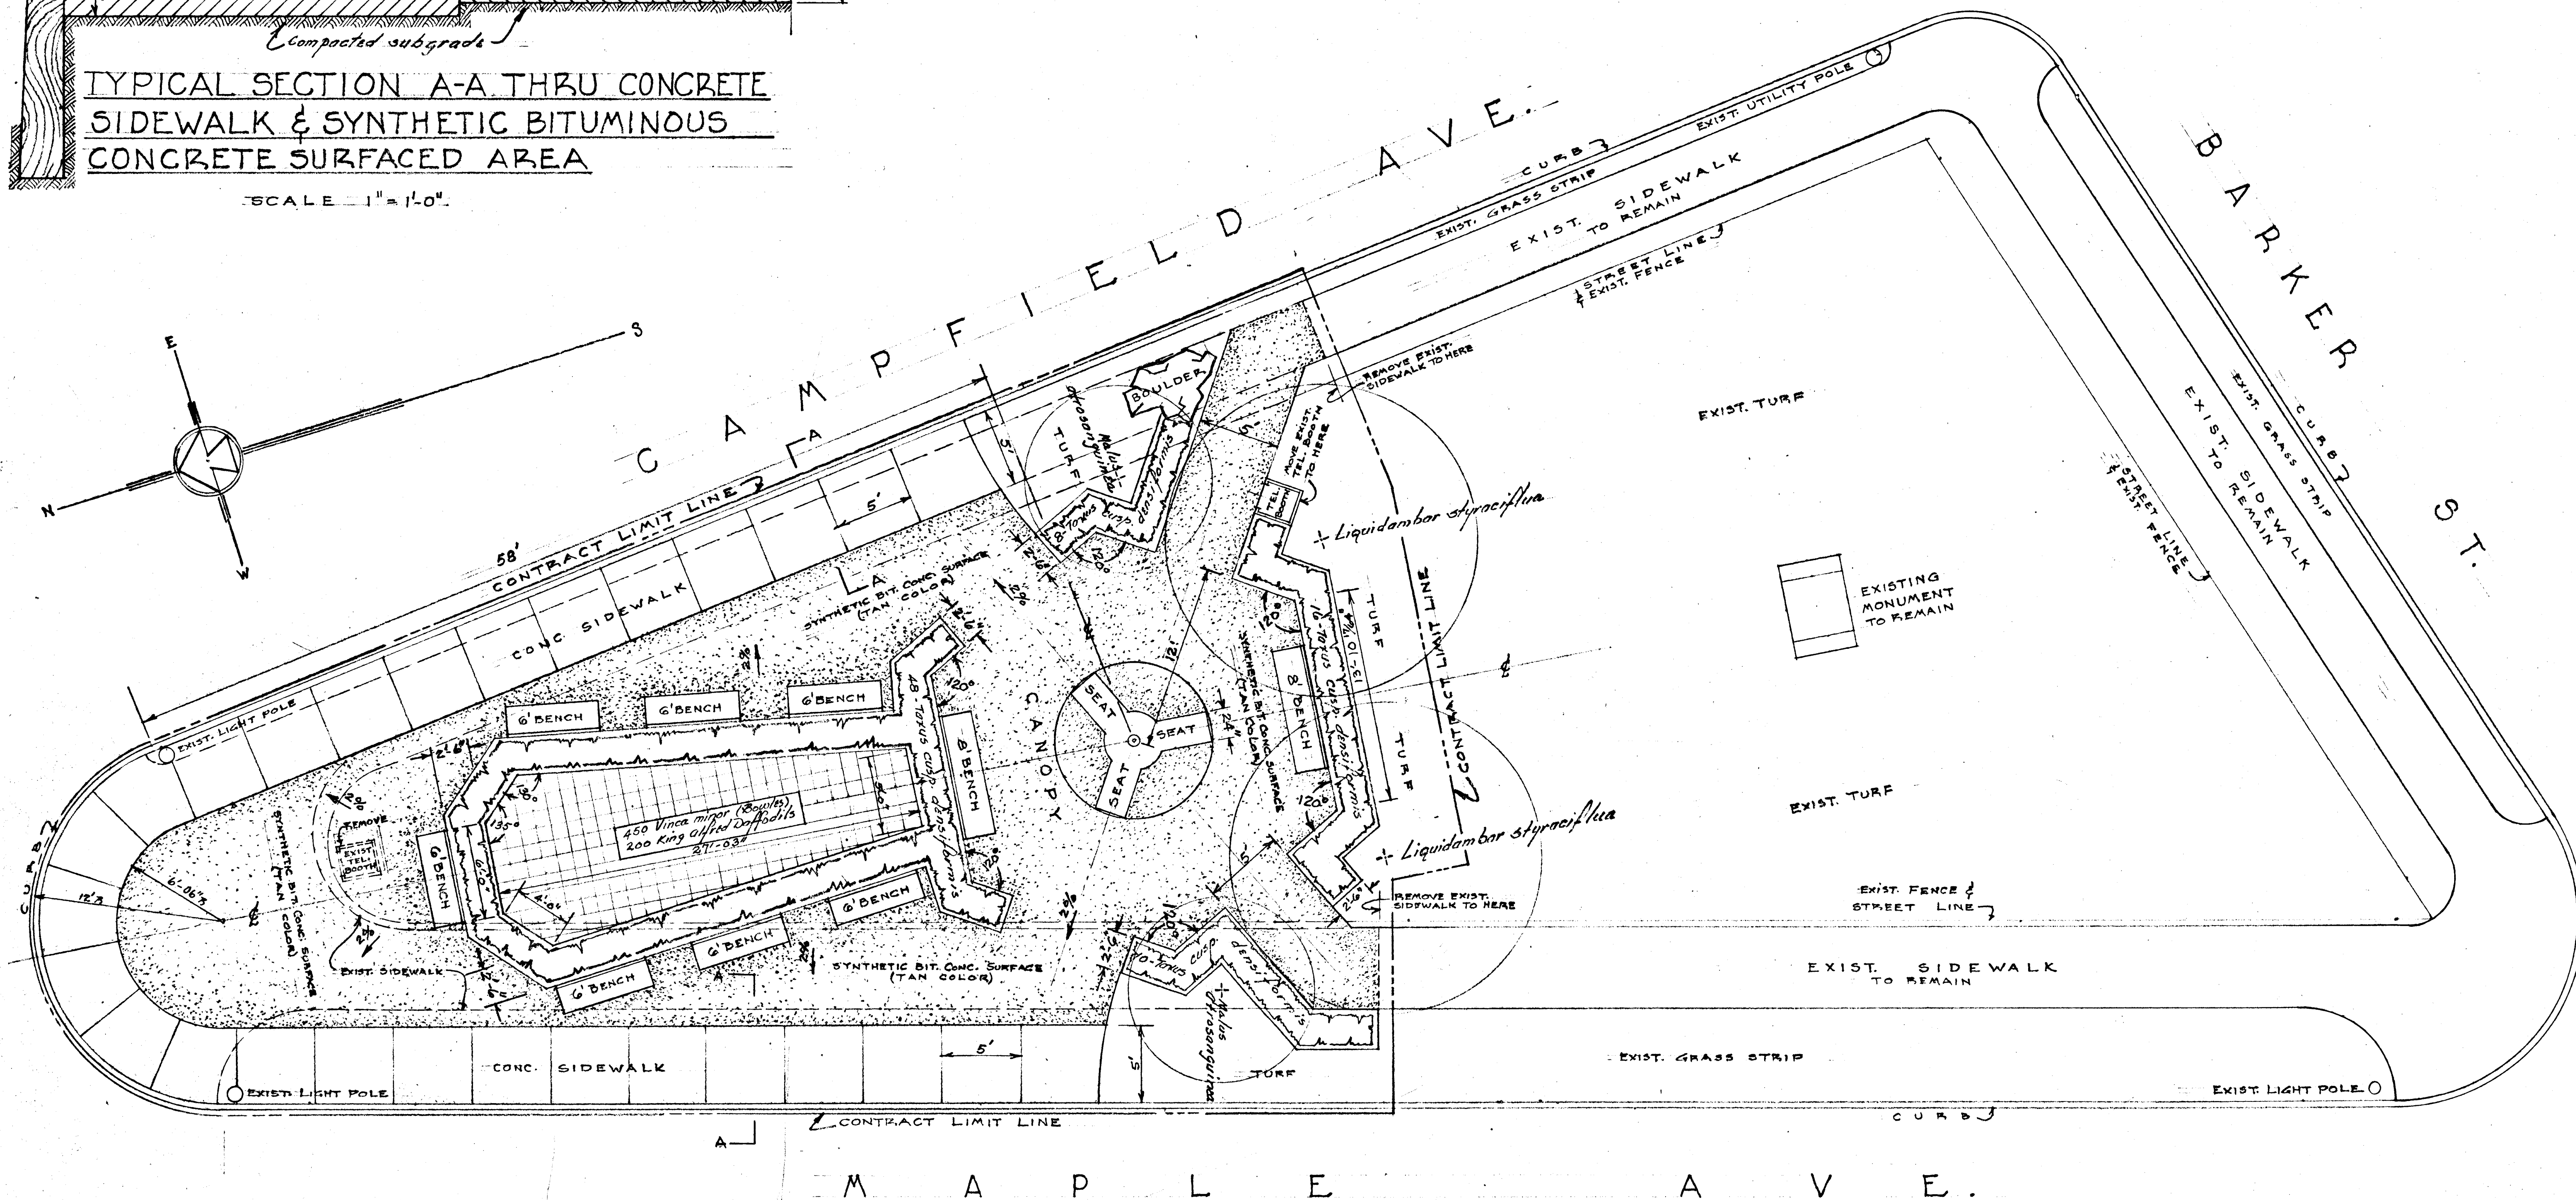

LEGEND

- 2% Two percent cross-slope
- (-/-) Proposed Tree (this contract)
- Conc. Concrete
- Proposed evergreen hedge (this contract)
- Exist. Existing
- Contract Limit Line
- Bit. Conc. Bituminous Concrete

NOTE:

Install longitudinal expansion joint 2'-0" from face of curb where and as ordered by the Engineer.

PROPOSED PLAZETTE AREA ST. AUGUSTINES TRIANGLE

CITY OF HARTFORD DEPT. OF PARKS & RECREATION
DESIGNED BY Art Hoffmann
CITY LANDSCAPE ARCHITECT
SCALE 1" = 5'
DATE 6 Nov, 1970

CITY OF HARTFORD, CONNECTICUT
DEPARTMENT OF ENGINEERING

SITE IMPROVEMENTS LAWNS & PLANTING

SUBMITTED M. M. Clark
DIVISION ENGINEER
RECOMMENDED Kenneth E. Berg
ASST. CITY ENG.
APPROVED James S. Hoffman
CITY ENGINEER
DESIGN A.H. DRAWN A.H.
TRACED A.H. CHECK
DAYBOOK NO. 010229
DATE JAN 1971