


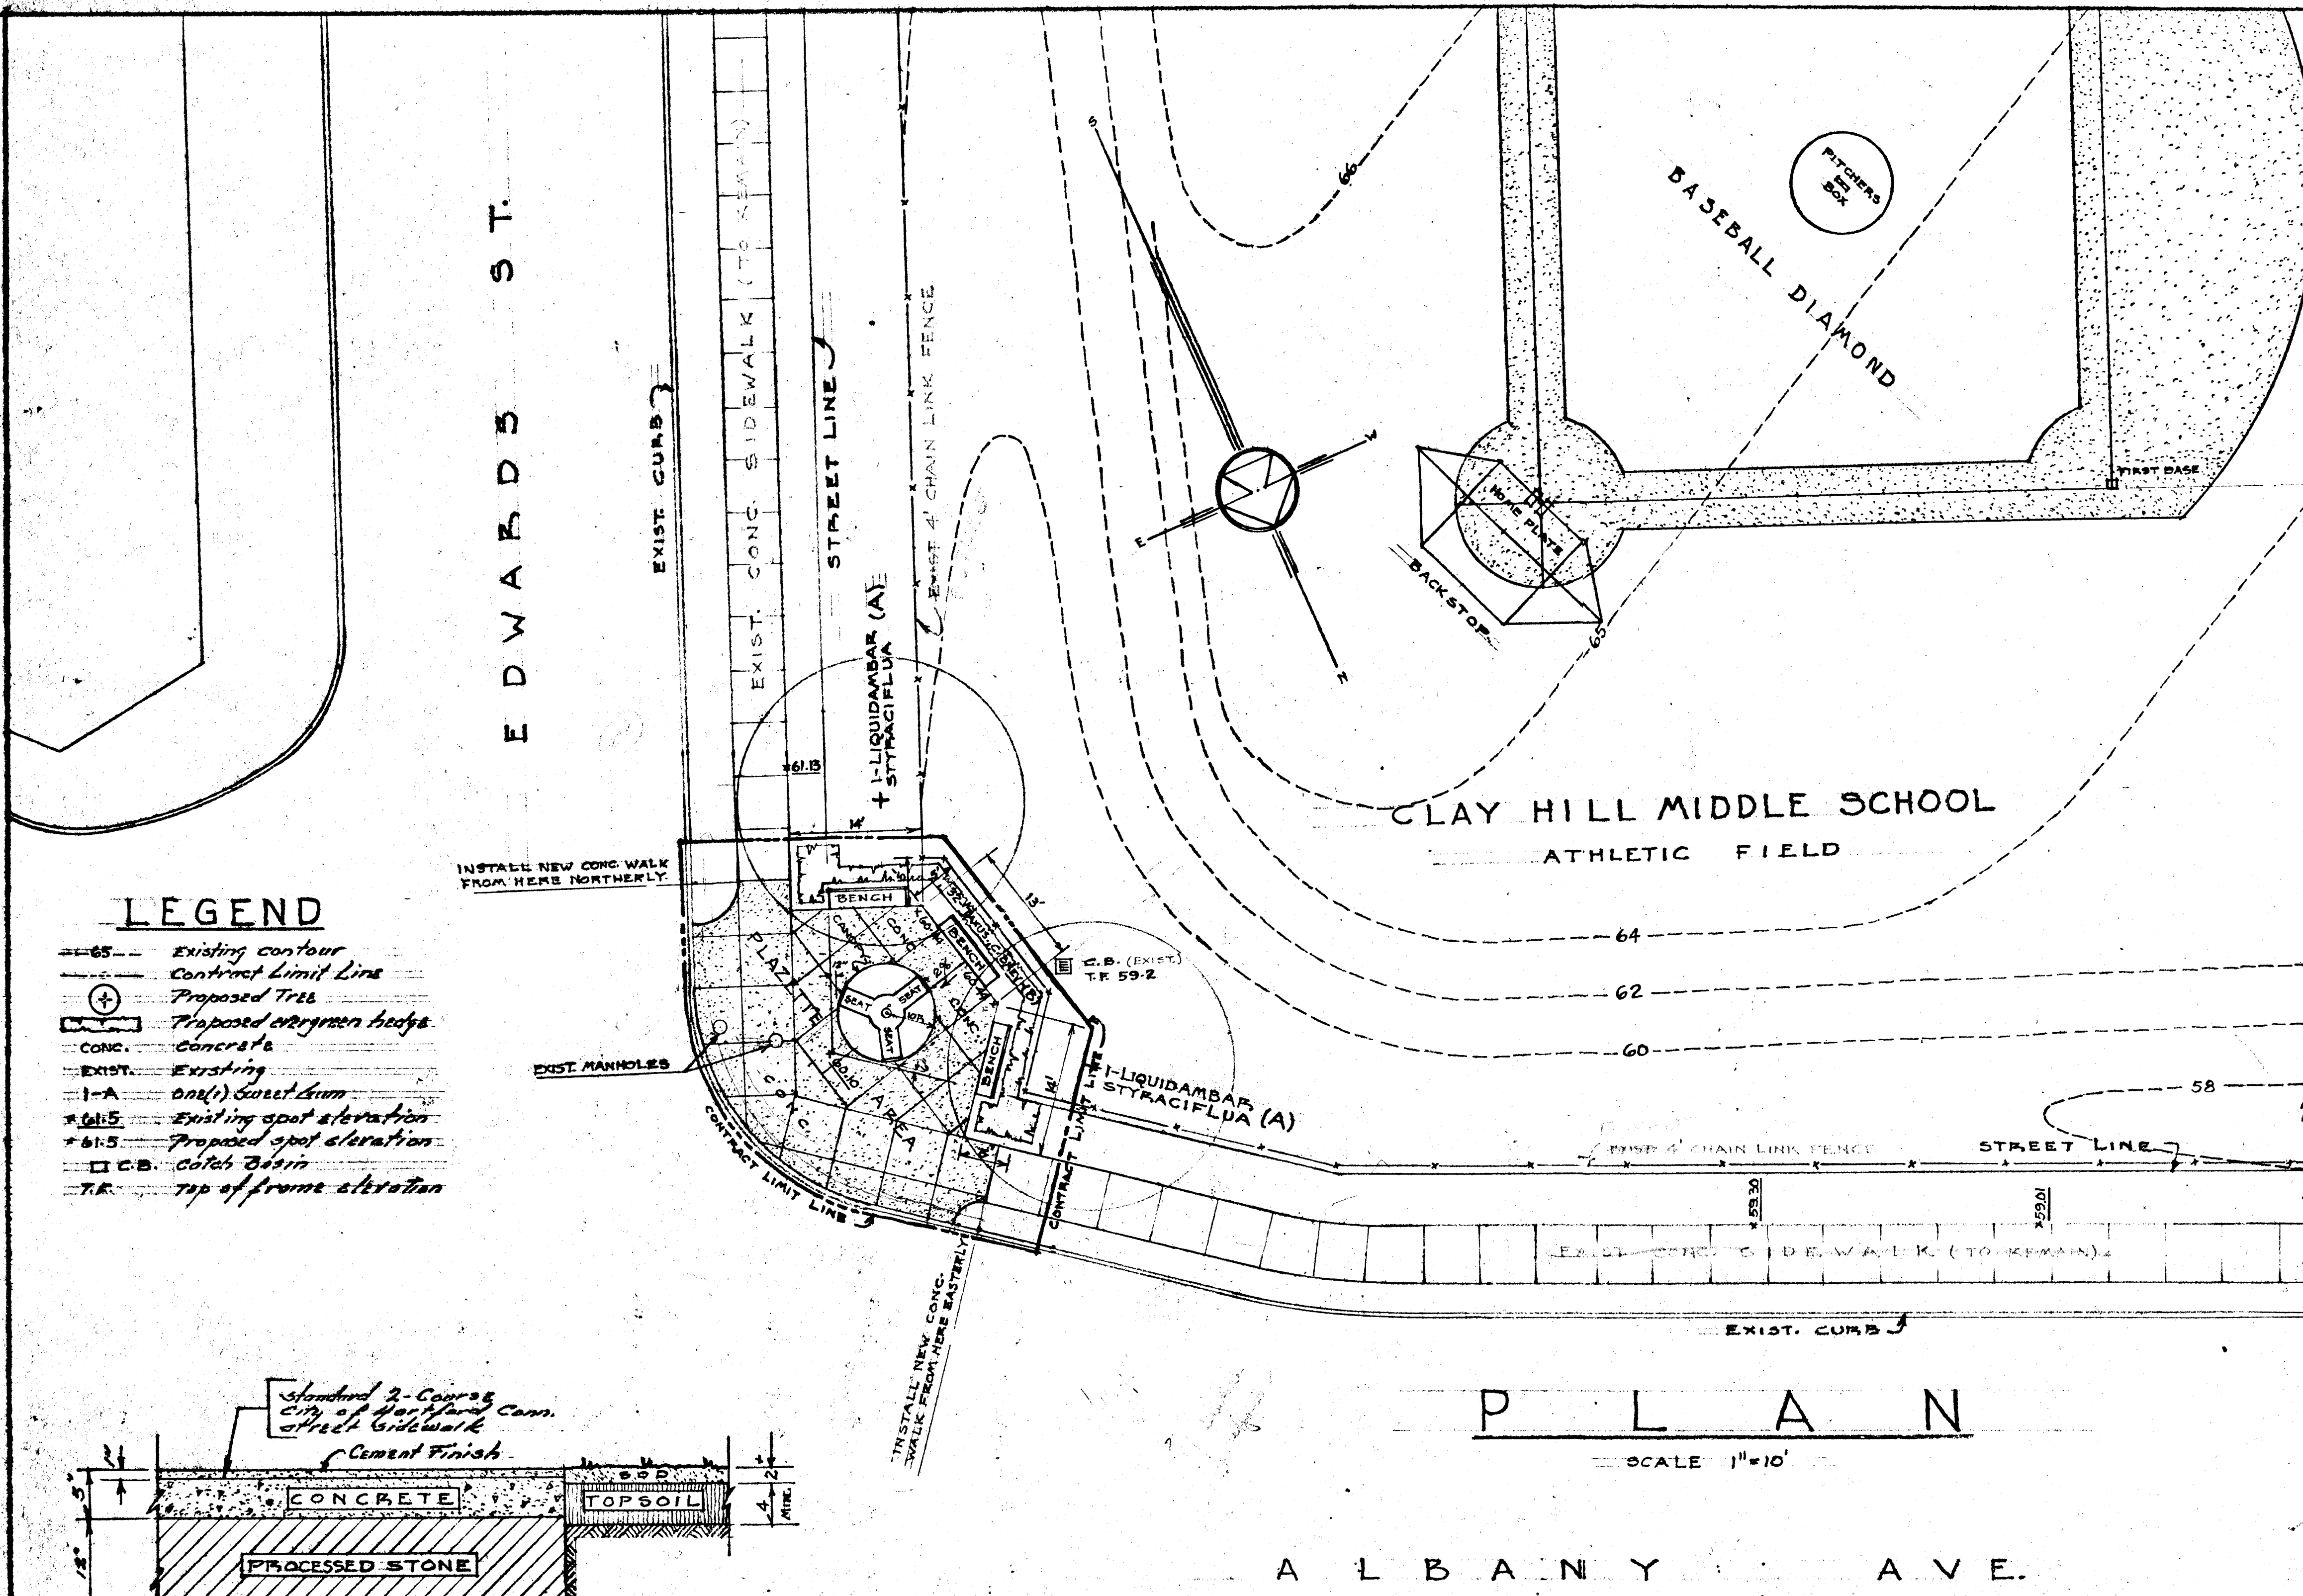


GENERAL NOTES AND SPECIFICATIONS

1. All areas not otherwise shown to be covered with concrete walk site improvement surfacing and located within the space outlined by the Contract Limit Line that are in any way disturbed by grading and construction maneuvers of this Contract shall be turfed with merion Blue Grass sod.
2. Planting bed for shrub hedge shall be prepared to a depth of 18 inches by 24" wide and backfilled with approved clean, friable agricultural type topsoil. Trees with #4 Weyerhaeuser Garden Bark.
3. Top soil at new sodded areas shall be not less than 4 inches deep.
4. Pits for new trees shall be dug at least 6 inches deeper than the depth of the ball and 24 inches wider than the diameter.
5. All planting of trees, shrubs, and sodding shall be done in accordance with the standard practices of the trade as is recommended by the American Nurseryman's Association.
6. All plant material shall comply with and be handled in accordance with specifications and instructions as set forth in the American Standard for Nursery Stock Publication as currently approved by the American Standards Association, Inc.
7. Spot and contour elevations shown on the Plan are approximate. Install new concrete slab walk at Plazette Area with not less than a 2% (percent) drainage slope toward the existing street curb to insure a positive surface drainage.
8. All newly planted trees shall be triple guyed and securely staked, sauced and mulched with regular grade Weyerhaeuser Garden Bark or equal to a depth of 7 inches and as otherwise directed by the City Landscape Architect.
9. Caliper measurement of trees to be taken not less than 6" above the natural grade level at the trunk.
10. All plant material to be root pruned nursery grown stock in a vigorous, healthy growing condition free of disease, infestation and damage.
11. All plant material must be inspected and tagged by the City Landscape Architect before delivery to the site.

LEGEND

- 65 — Existing contour
- — — Contract Limit Line
- ⊕ Proposed Tree
- ⊕ Proposed evergreen hedge
- CONC. Concrete
- EXIST. Existing
- 1-A One (1) Sweet Gum
- * 61.5 Existing spot elevation
- * 61.5 Proposed spot elevation
- C.B. Catch Basin
- T.R. Top of frame elevation

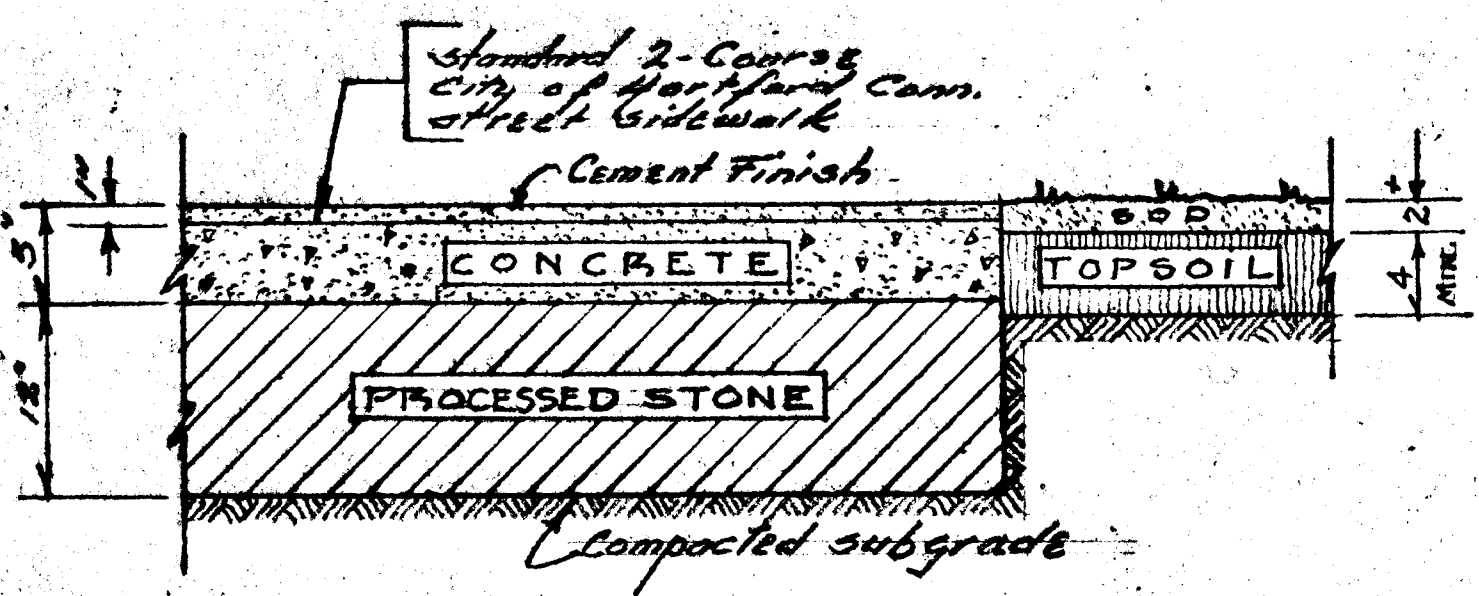

TYPICAL SECTION THRU
NEW CONCRETE SLAB
WALK AT PLAZETTE AREA

SCALE 1" = 1'-0"

NOTE:

Install longitudinal expansion joint 2'-0" from face of curb or at other locations as ordered by the Engineer.

PLANT MATERIAL LIST										
ITEM	CODE	BOTANICAL NAME	COMMON NAME	QUAN.	CALIPER	BRANCH HEIGHT	TOTAL HEIGHT	FRUIT COLOR	CONES PER PLANT	ROOTS
LARGE TREES										
1.	A	Liquidambar styraciflua	Sweet Gum	2	3"-3 1/2"	7'	14'-16'	Brownish	1	3/8"
2.	B	Torus cuspidata densiformis	Chinese Japanese Elm	32	2"-2 1/2"			Red	20-25	1/2"
FURNITURE LIST										
ITEM	NAME		QUANTITY	MODEL	MANUFACTURER OR EQUAL	REMARKS				
1.	Park Bench (Permanent, Angle leg) yellow		3	No. 165-006	Longer Rec. Prod.	8' long, (Wt. 111 lbs)				

A PLAZETTE AREA

COR. EDWARDS ST. & ALBANY AVE.

CITY OF HARTFORD DEPT. OF PARKS & RECREATION

DESIGNED BY Art Hoffmann

CITY LANDSCAPE ARCHITECT

SCALE: AS SHOWN

CITY OF HARTFORD, CONNECTICUT DEPARTMENT OF ENGINEERING		
SITE IMPROVEMENTS AND LAWNS & PLANTING		
SUBMITTED M. M. Oline DIVISION ENGINEER	RECOMMENDED L. M. Oline ASST. CITY ENG.	APPROVED J. E. Oline CITY ENGINEER
DESIGN A.H. DRAWN	A.H.	DAYBOOK NO. 010230
TRACED A.H. CHECK		DATE JAN. 1971