

- 1 (C) EXISTING DRIVEWAY RAMP TO REMAIN
(D) CONSTRUCT 8" REINFORCED CONC. SIDEWALK ON NEW FOUNDATION
(C) CONSTRUCT 8" REINFORCED CONC. DRIVEWAY RAMP ON NEW FOUNDATION
(1) RELAY FLAGSTONE WALK
98.69 EXISTING GRADE
(98.66) PROPOSED GRADE

2 ELEVATIONS ARE BASED ON METROPOLITAN DISTRICT COMMISSION (MDC) DATUM

3 RIM OR FRAME ELEVATIONS OF ALL UTILITY GATE BOXES, HANDHOLES, MANHOLES AND CATCH BASINS ARE TO BE ADJUSTED AS REQUIRED TO MATCH PROPOSED FINISHED PAVED SURFACES


4 CALL BEFORE YOU DIG - THE CONTRACTOR IS HEREBY REMINDED THAT PURSUANT TO PUBLIC ACT 87-71 REQUIRES NOTIFICATION TO UTILITY COMPANIES OF PENDING EXCAVATION AT OR NEAR THE LOCATION OF PUBLIC UTILITIES. THE CONTRACTOR SHALL CALL THIS NUMBER 1-800-922-4455 AT LEAST 48 HOURS, EXCLUDING SATURDAYS, SUNDAYS AND HOLIDAYS, BUT NOT MORE THAN THIRTY DAYS (ONE MONTH) PRIOR TO EXCAVATION

BENCH RUN	
ELEV.	DESCRIPTION
93.40	CMS @ SOUTHWEST CORNER OF FARMINGTON AVE. & NO. BEACON ST.
100.50	NORTH FLANGE BOLT ON HYDRANT STA. 44+54
103.52	NORTH FLANGE BOLT ON HYDRANT STA. 74+49
105.88	NORTH FLANGE BOLT ON HYDRANT STA. 104+67.5 (SE CORNER OF NO. BEACON ST. & CONE ST.)
108.84	PK NAIL IN SNET POLE #1262 E. SIDE STA. 15+63
108.63	CMS @ SOUTHEAST CORNER OF FERN ST. & NO. BEACON ST.
111.17	PK NAIL IN SNET POLE #1266 EAST SIDE STA. 20+49.8
116.87	SOUTHEAST FLANGE BOLT ON HYDRANT STA. 22+72.6
122.30	NORTH FLANGE BOLT ON HYDRANT STA. 28+50
123.00	CHISEL CUT NORTHWEST CORNER OF BROWNSTONE #212 NO. BEACON ST.
126.10	NORTH FLANGE BOLT ON HYDRANT STA. 30+60
122.15	CMS @ SOUTHEAST CORNER OF ELIZABETH ST. & NO. BEACON ST.

CITY OF HARTFORD, CONNECTICUT
DEPARTMENT OF PUBLIC WORKS
ENGINEERING SERVICES

NORTH BEACON STREET
PLAN & PROFILE
STA. 1+00 TO STA. 5+50

SUBMITTED		RECOMMENDED	APPROVED
PROJECT ENGINEER		MANAGER	CITY ENGINEER
DRAWN	RDG.	SCALE: HORIZ. 1" = 20' VERT. 1" = 2'	DAYBOOK NO. 011147 DATE JULY 1992 FILE NAME NOBEACON.DWG
CHECKED			SHEET 7 OF 13

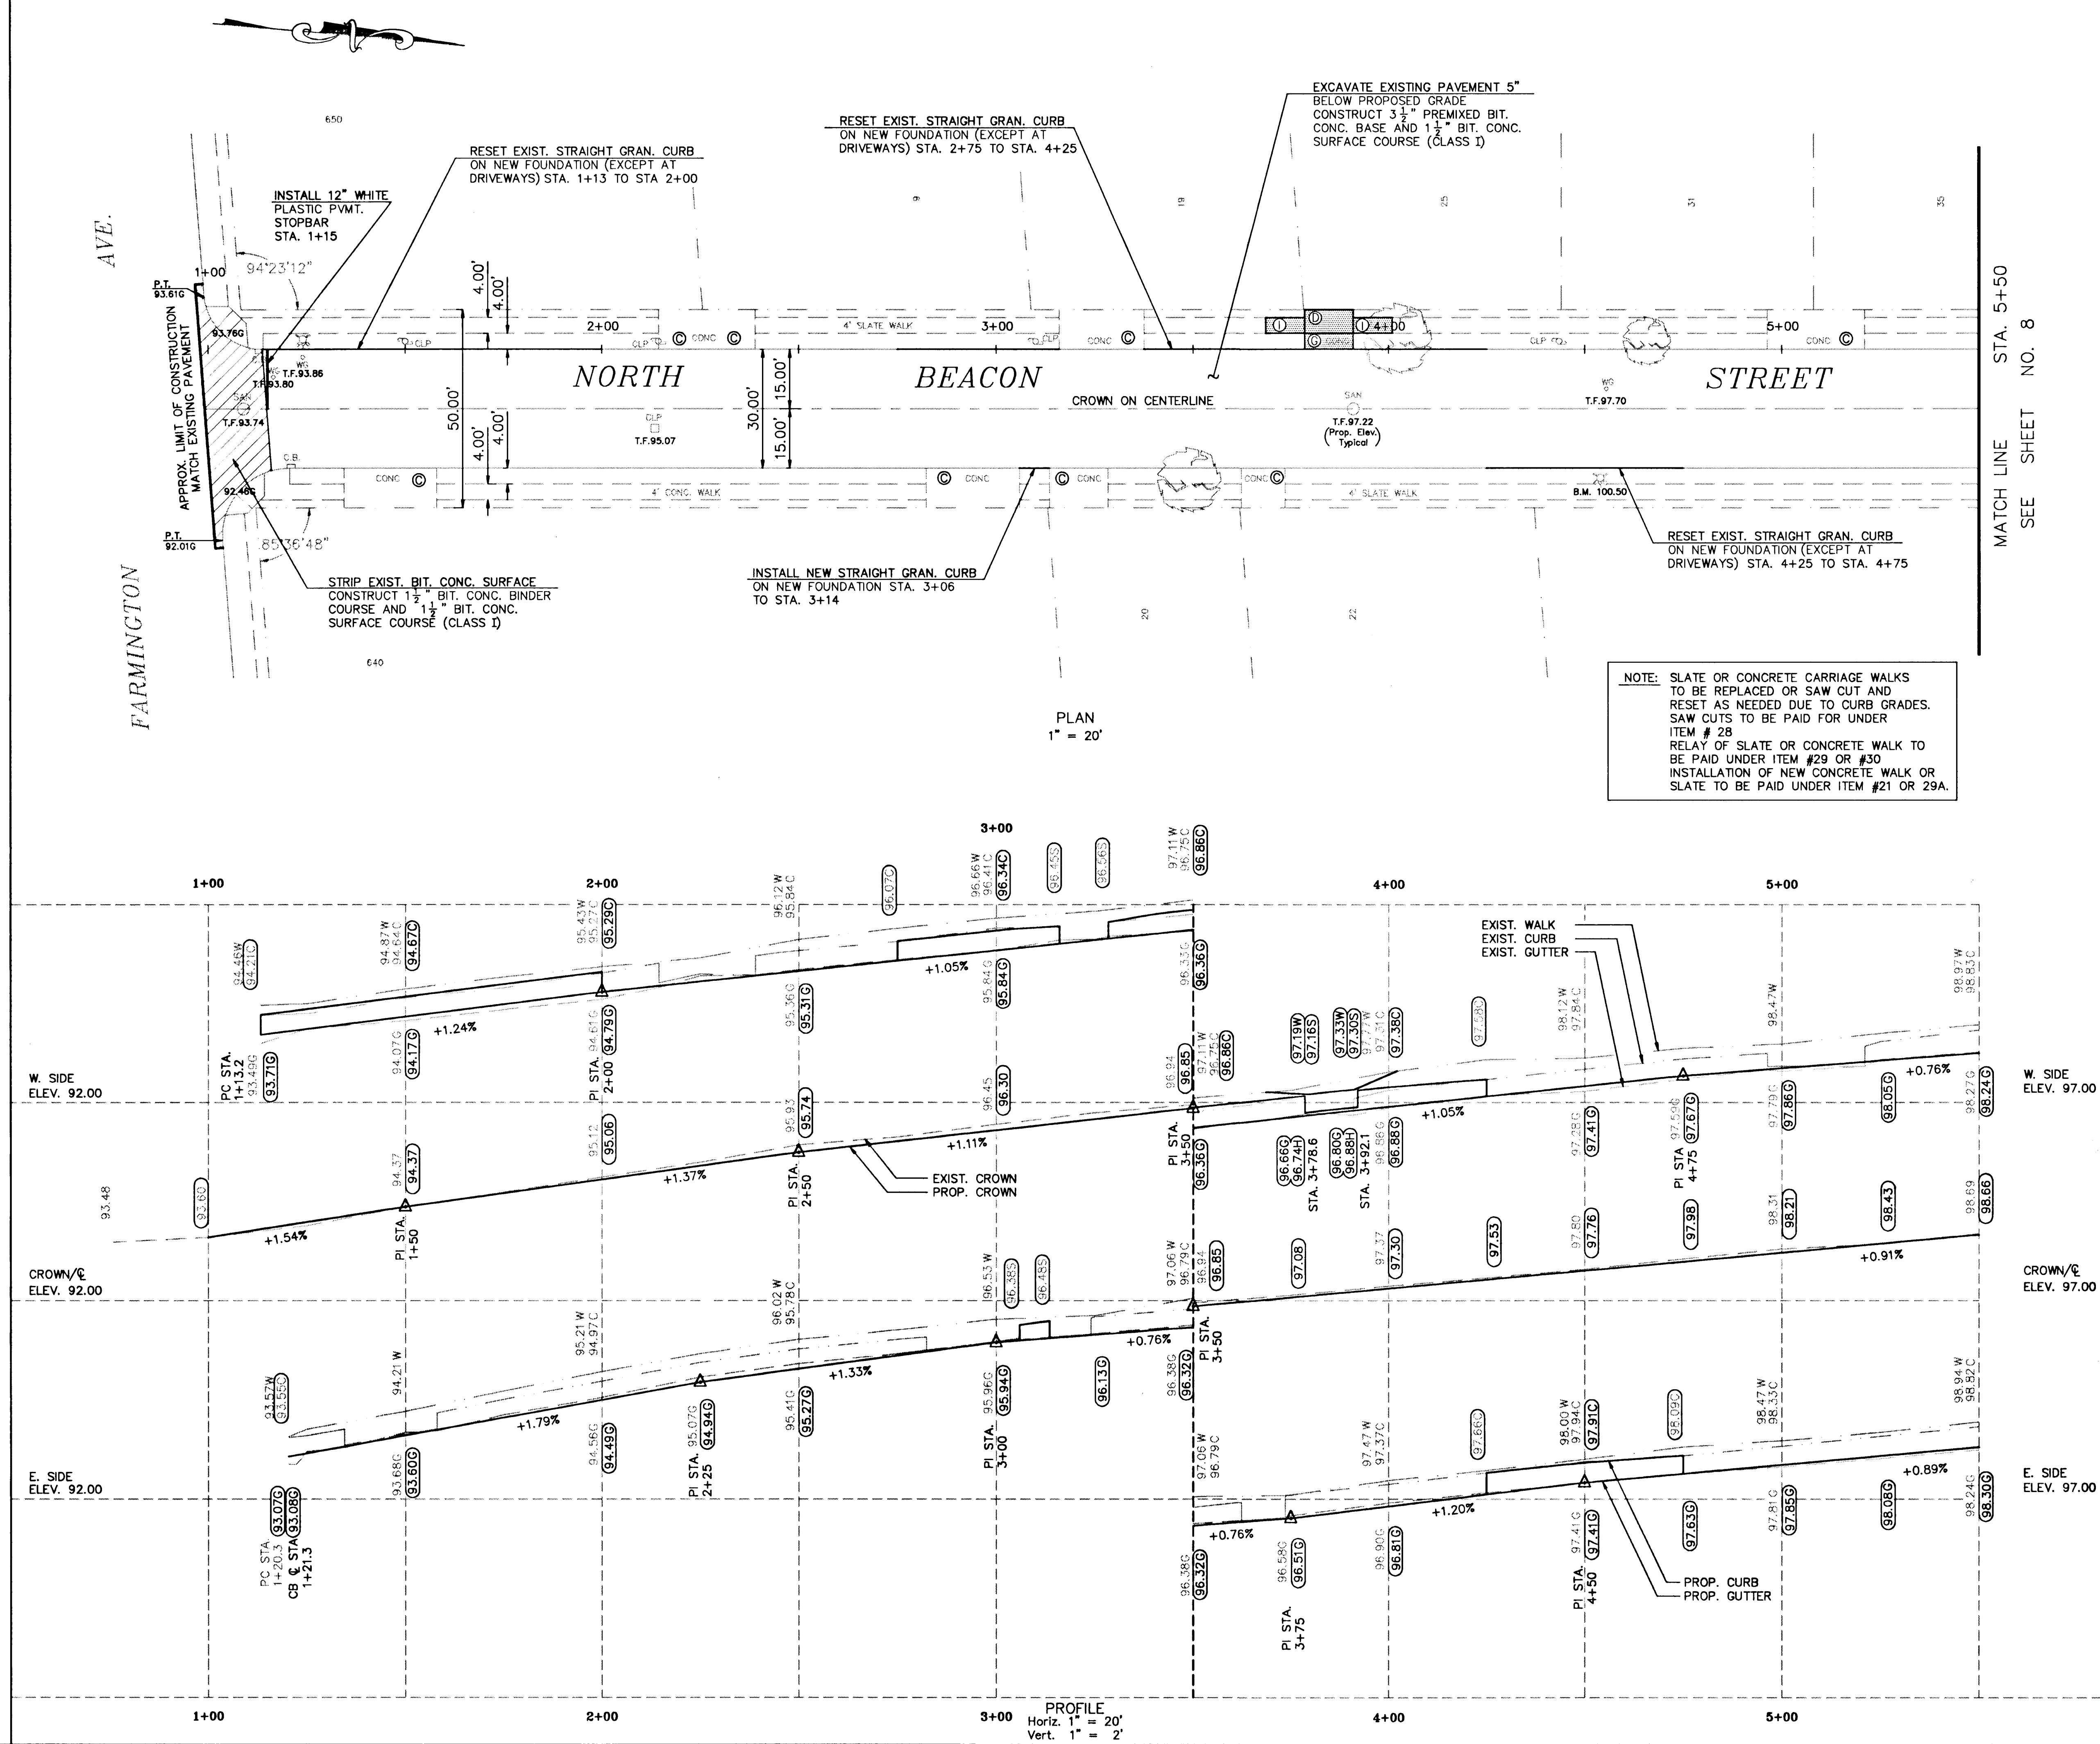

MATCH LINE STA. 5+50
SEE SHEET NO. 8