
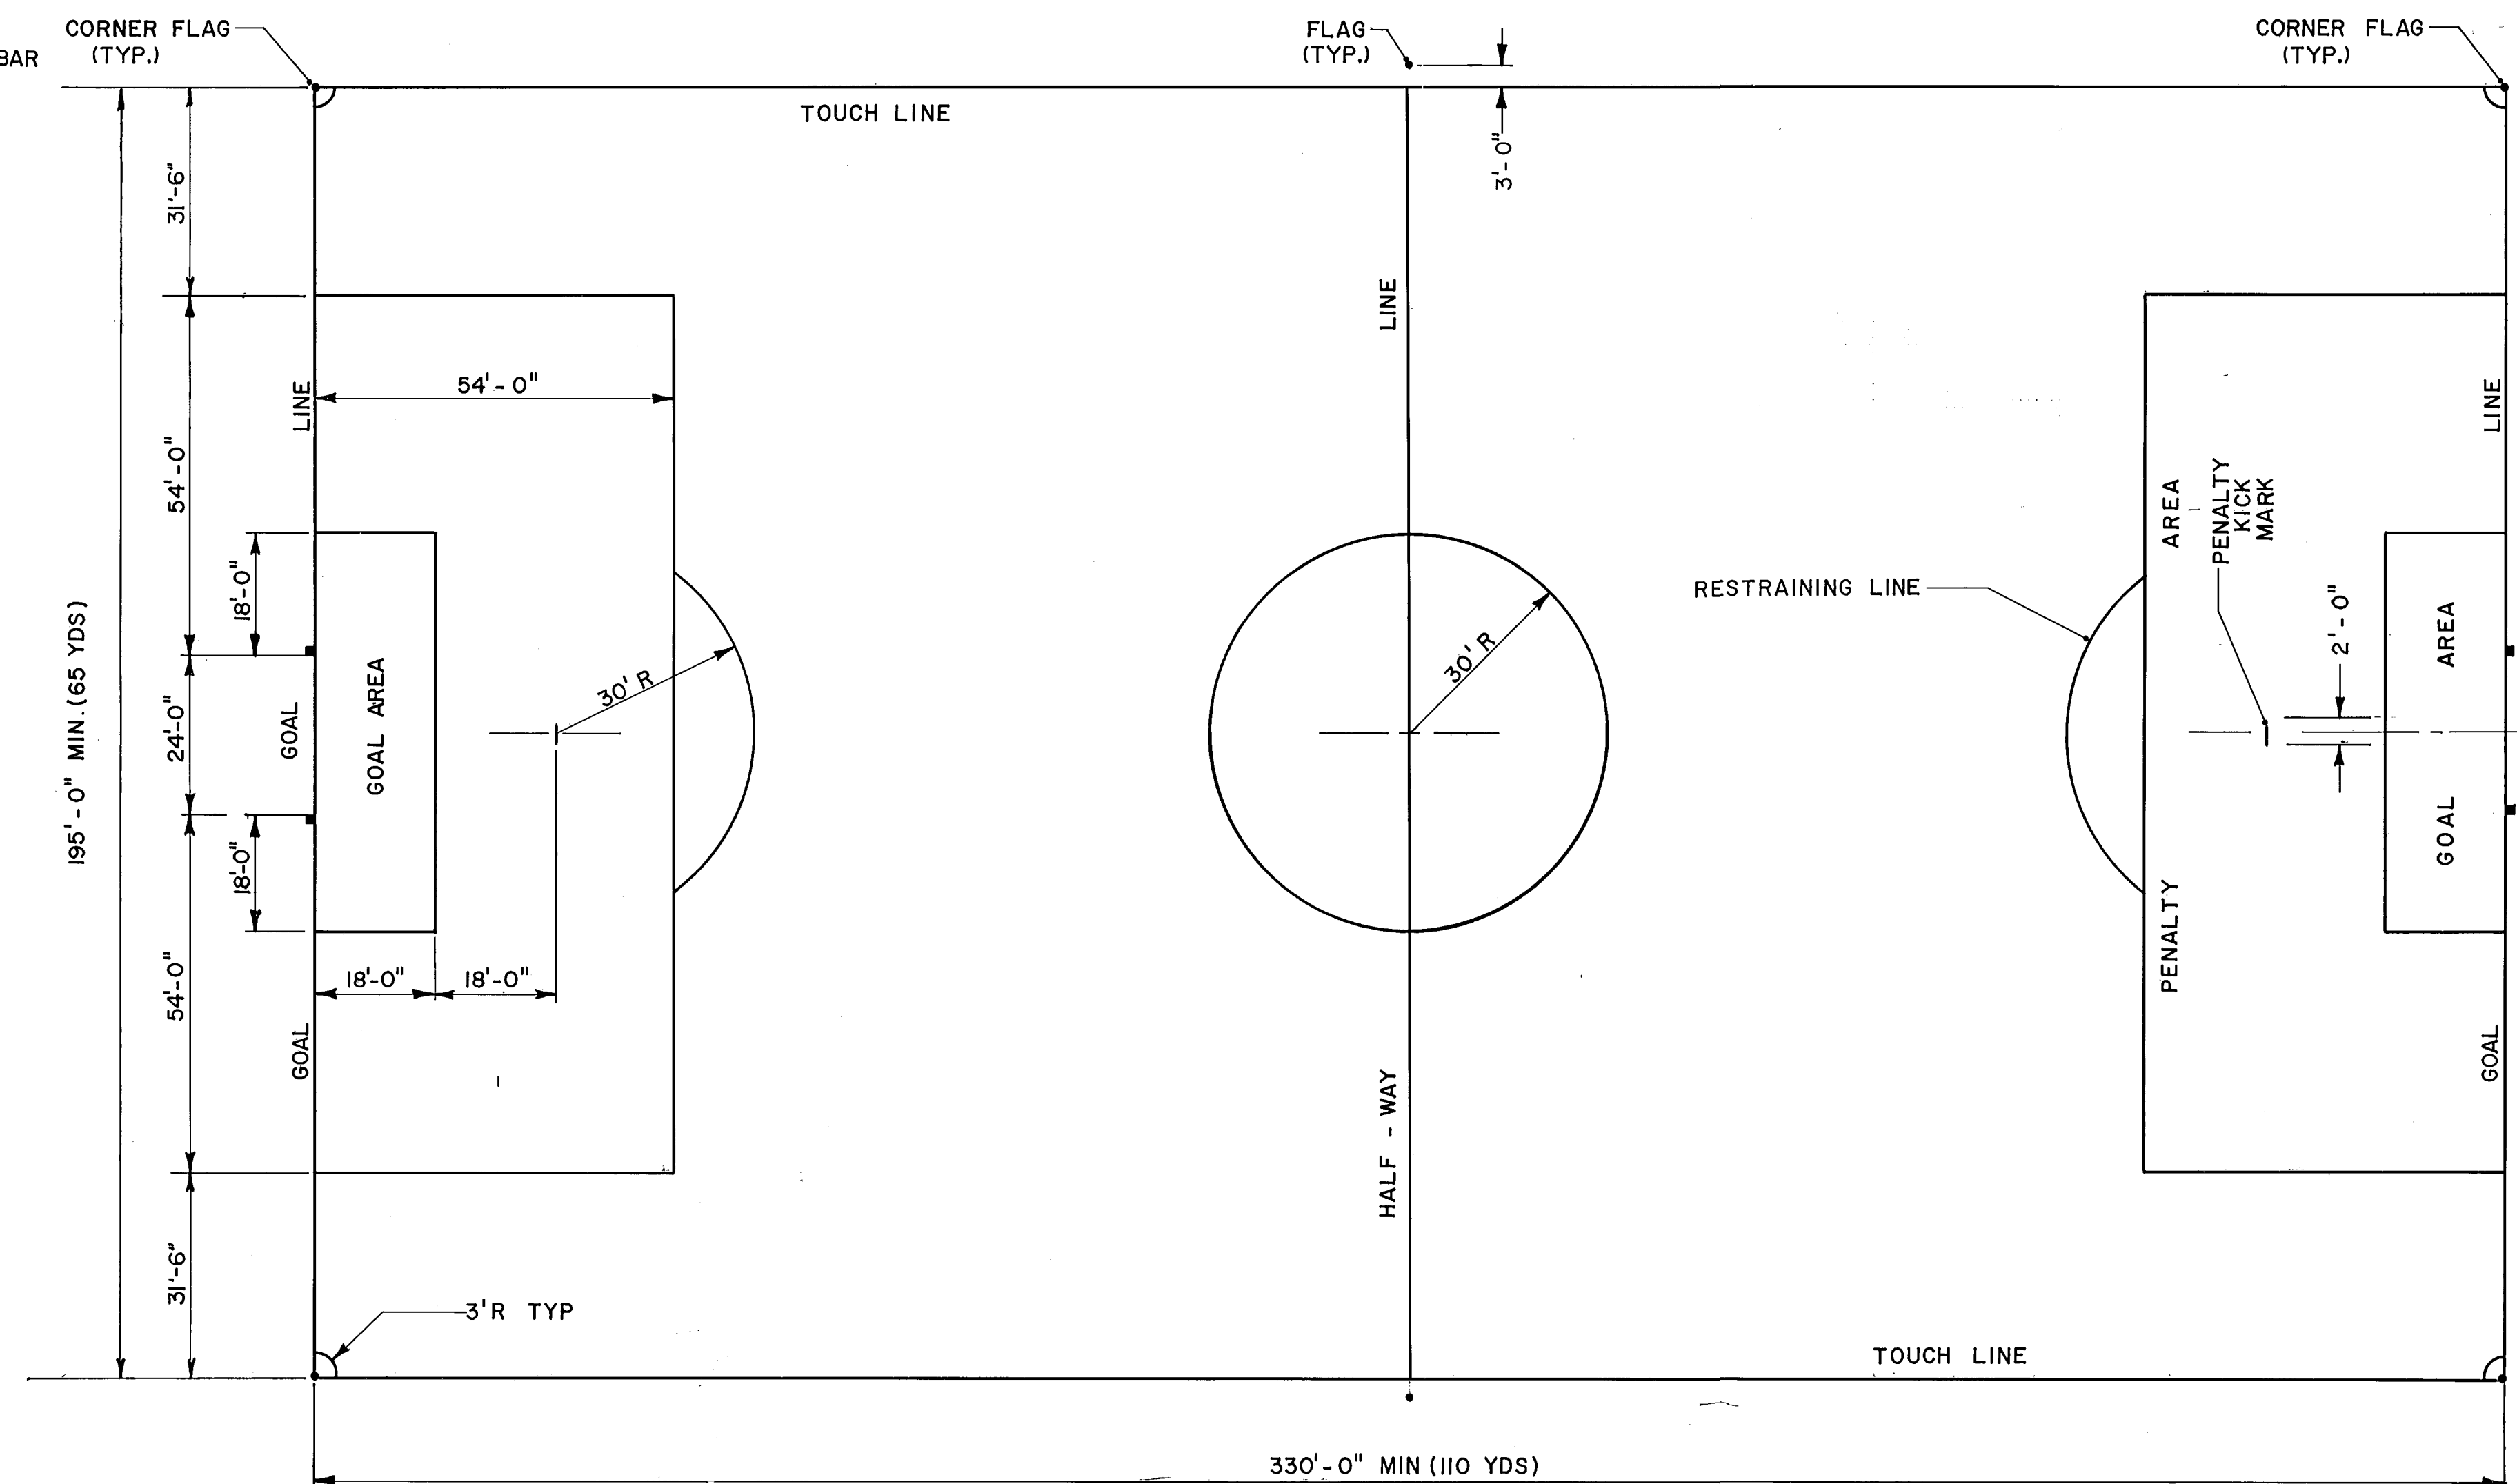
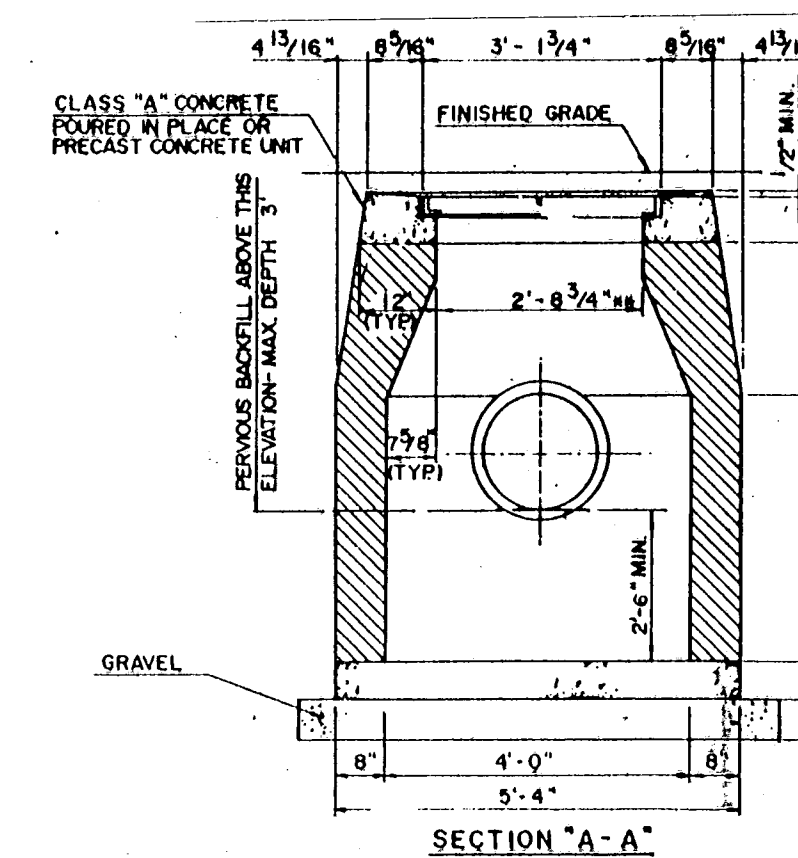
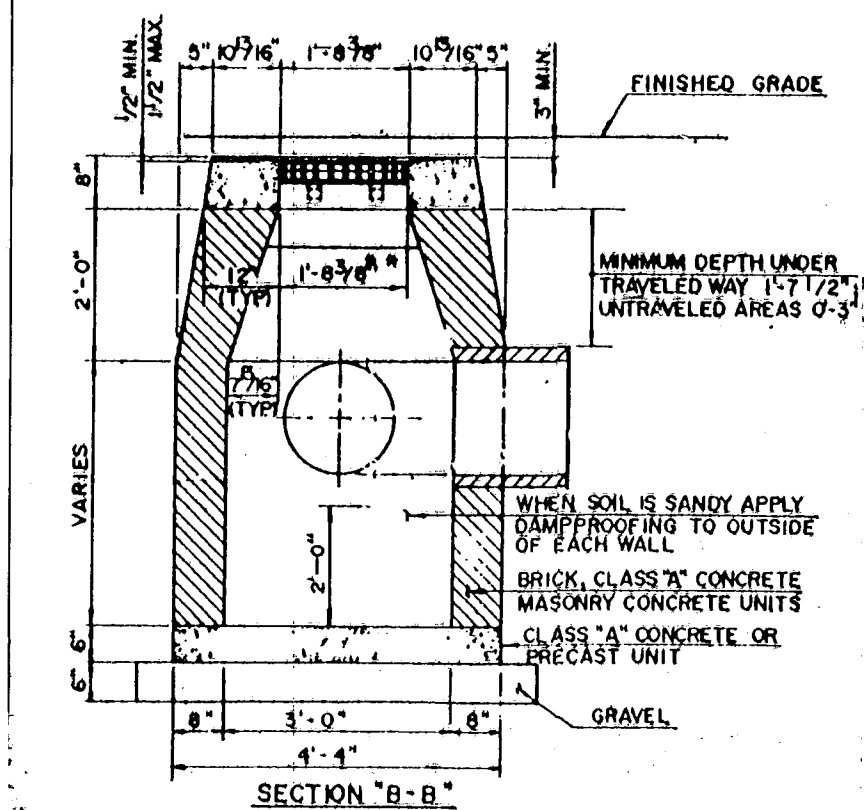


- ## GENERAL NOTE FOR SOCCER FIELD:
1. ALL DIMENSIONS ARE TO THE INSIDE EDGE OF LINES.
 2. ALL LINES SHALL BE 2" WIDE AND MARKED WITH A WHITE NON-TOXIC MATERIAL WHICH IS NOT INJURIOUS TO THE EYES OR SKIN.
 3. THE GOALPOSTS AND CROSSBAR SHALL PRESENT A FLAT SURFACE TO THE PLAYING FIELD, NOT LESS THAN FOUR INCHES NOR MORE THAN FIVE INCHES IN WIDTH.
 4. NETS SHALL BE ATTACHED TO THE POSTS, CROSSBAR AND GROUND BEHIND THE GOAL.
 5. THE TOP OF THE NET MUST EXTEND BACKWARD 2'-0" LEVEL WITH THE CROSSBAR.

NOTES

- 1 WALLS OF ALL CATCH BASINS OVER 10 FT DEEP TO BE INCREASED TO 12" THICKNESS INSIDE DIMENSIONS TO MAINTAIN THE SAME
- 2 PROVIDE 2" DIA. WEIRPINS IN EACH WALL AT LOWEST INVERT ELEVATION.
- 3 WHERE BRICK OR MASONRY CONCRETE UNITS ARE USED, CORRELLING WILL BE PERMITTED. MAX. ALLOWED CORREL TO BE 1" PROJECTION SHALL EXCEED INSIDE OF LIMITS NOTED BY **
- 4 PRECAST CONCRETE CATCH BASIN UNITS MAY BE UTILIZED.
- 5 WHERE PRECAST CONCRETE UNIT IS USED FOR MAIN, THE TOP OF THE UNIT SHALL BE AT LEAST 6" BELOW THE BOTTOM OF THE PIPE OUTLETTING FROM THE CATCH BASIN.
- 6 WHERE TYPE "C" CATCH BASIN IS CONSTRUCTED IN PAVEMENT AREA, THE NORMAL CROSS SLOPE SHALL BE BETTER AND MAY BE VARIED TO MATCH CROSS SLOPE OF GRATE.

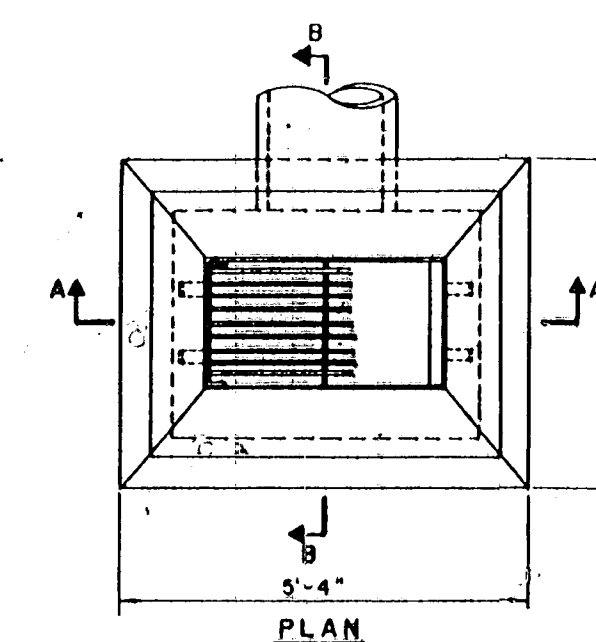

DETAIL OF TYPE C-L-CATCH BASIN
SCALE: NONE

CITY OF HARTFORD, CONNECTICUT DEPARTMENT OF PUBLIC WORKS BUREAU OF ENGINEERING SERVICES		
STANDARD FIELD LAYOUT & MISCELLANEOUS DETAILS FOR COLUMBUS (SOUTH END) PARK		
SUBMITTED <i>James J. Quinn</i> PROJECT ENGINEER	RECOMMENDED <i>James J. Quinn</i> DIVISION MANAGER	APPROVED <i>Stephen Quinn</i> CITY ENGINEER, E&S
DRAWN: <u>ALG</u> CHECKED: <u>H.O.</u>	SCALE AS NOTED	DAYBOOK NO. 011220C DATE AUGUST 1990