

GENERAL NOTES

ELEVATIONS ARE BASED ON METROPOLITAN DISTRICT COMMISSION (MDC) DATUM

RIM OR FRAME ELEVATIONS OF ALL UTILITY GATE BOXES, HANDHOLES, MANHOLES AND CATCH BASINS ARE TO BE ADJUSTED AS REQUIRED TO MATCH PROPOSED FINISHED PAVED SURFACES



CALL BEFORE YOU DIG - THE CONTRACTOR IS HEREBY REMINDED THAT PURSUANT TO PUBLIC ACT 87-71 REQUIRES NOTIFICATION TO UTILITY COMPANIES OF PENDING EXCAVATION AT OR NEAR THE LOCATION OF PUBLIC UTILITIES. THE CONTRACTOR SHALL CALL THIS NUMBER: 1-800-922-4455 AT LEAST 48 HOURS, EXCLUDING SATURDAYS, SUNDAYS AND HOLIDAYS, BUT NOT MORE THAN THIRTY DAYS (ONE MONTH) PRIOR TO EXCAVATION

5" EXCAVATION LISTED IN BIDDING DOCUMENTS NOT SHOWN ON PLANS. 5" EXCAVATION WILL BE USED IN LIEU OF 17" EXCAVATION IF FIELD CONDITIONS SHOW ADEQUATE STONE BASE.

- ② SAWCUT BETWEEN EXISTING RAMPED SECTION AND SIDEWALK, AND CONSTRUCT NEW 8" REINFORCED CONC. DRIVEWAY RAMP
- ③ CONSTRUCT 8" REINFORCED CONC. SIDEWALK ON NEW FOUNDATION
- ④ CONSTRUCT 2" BIT. CONC. SURFACE ON NEW FOUNDATION, EXCEPT AT DRIVEWAYS AND RAMPS
- ⑤ TOPSOIL, SEEDING, FERTILIZING & MULCHING
- ⑥ CONSTRUCT 8" REINFORCED CONC. DRIVEWAY RAMP ON NEW FOUNDATION
- ⑦ CONSTRUCT 5" CONC. SIDEWALK ON NEW FOUNDATION EXCEPT AT DRIVEWAYS

BENCH MARKS

- EL. 92.03 TOP OF SW FLANGE BOLT ON HYDRANT AT NW CORNER AFFLECK AND WARD STA. 0+96.4
- EL. 89.58 TOP OF EAST FLANGE BOLT ON HYDRANT WEST SIDE STA. 2+9.5

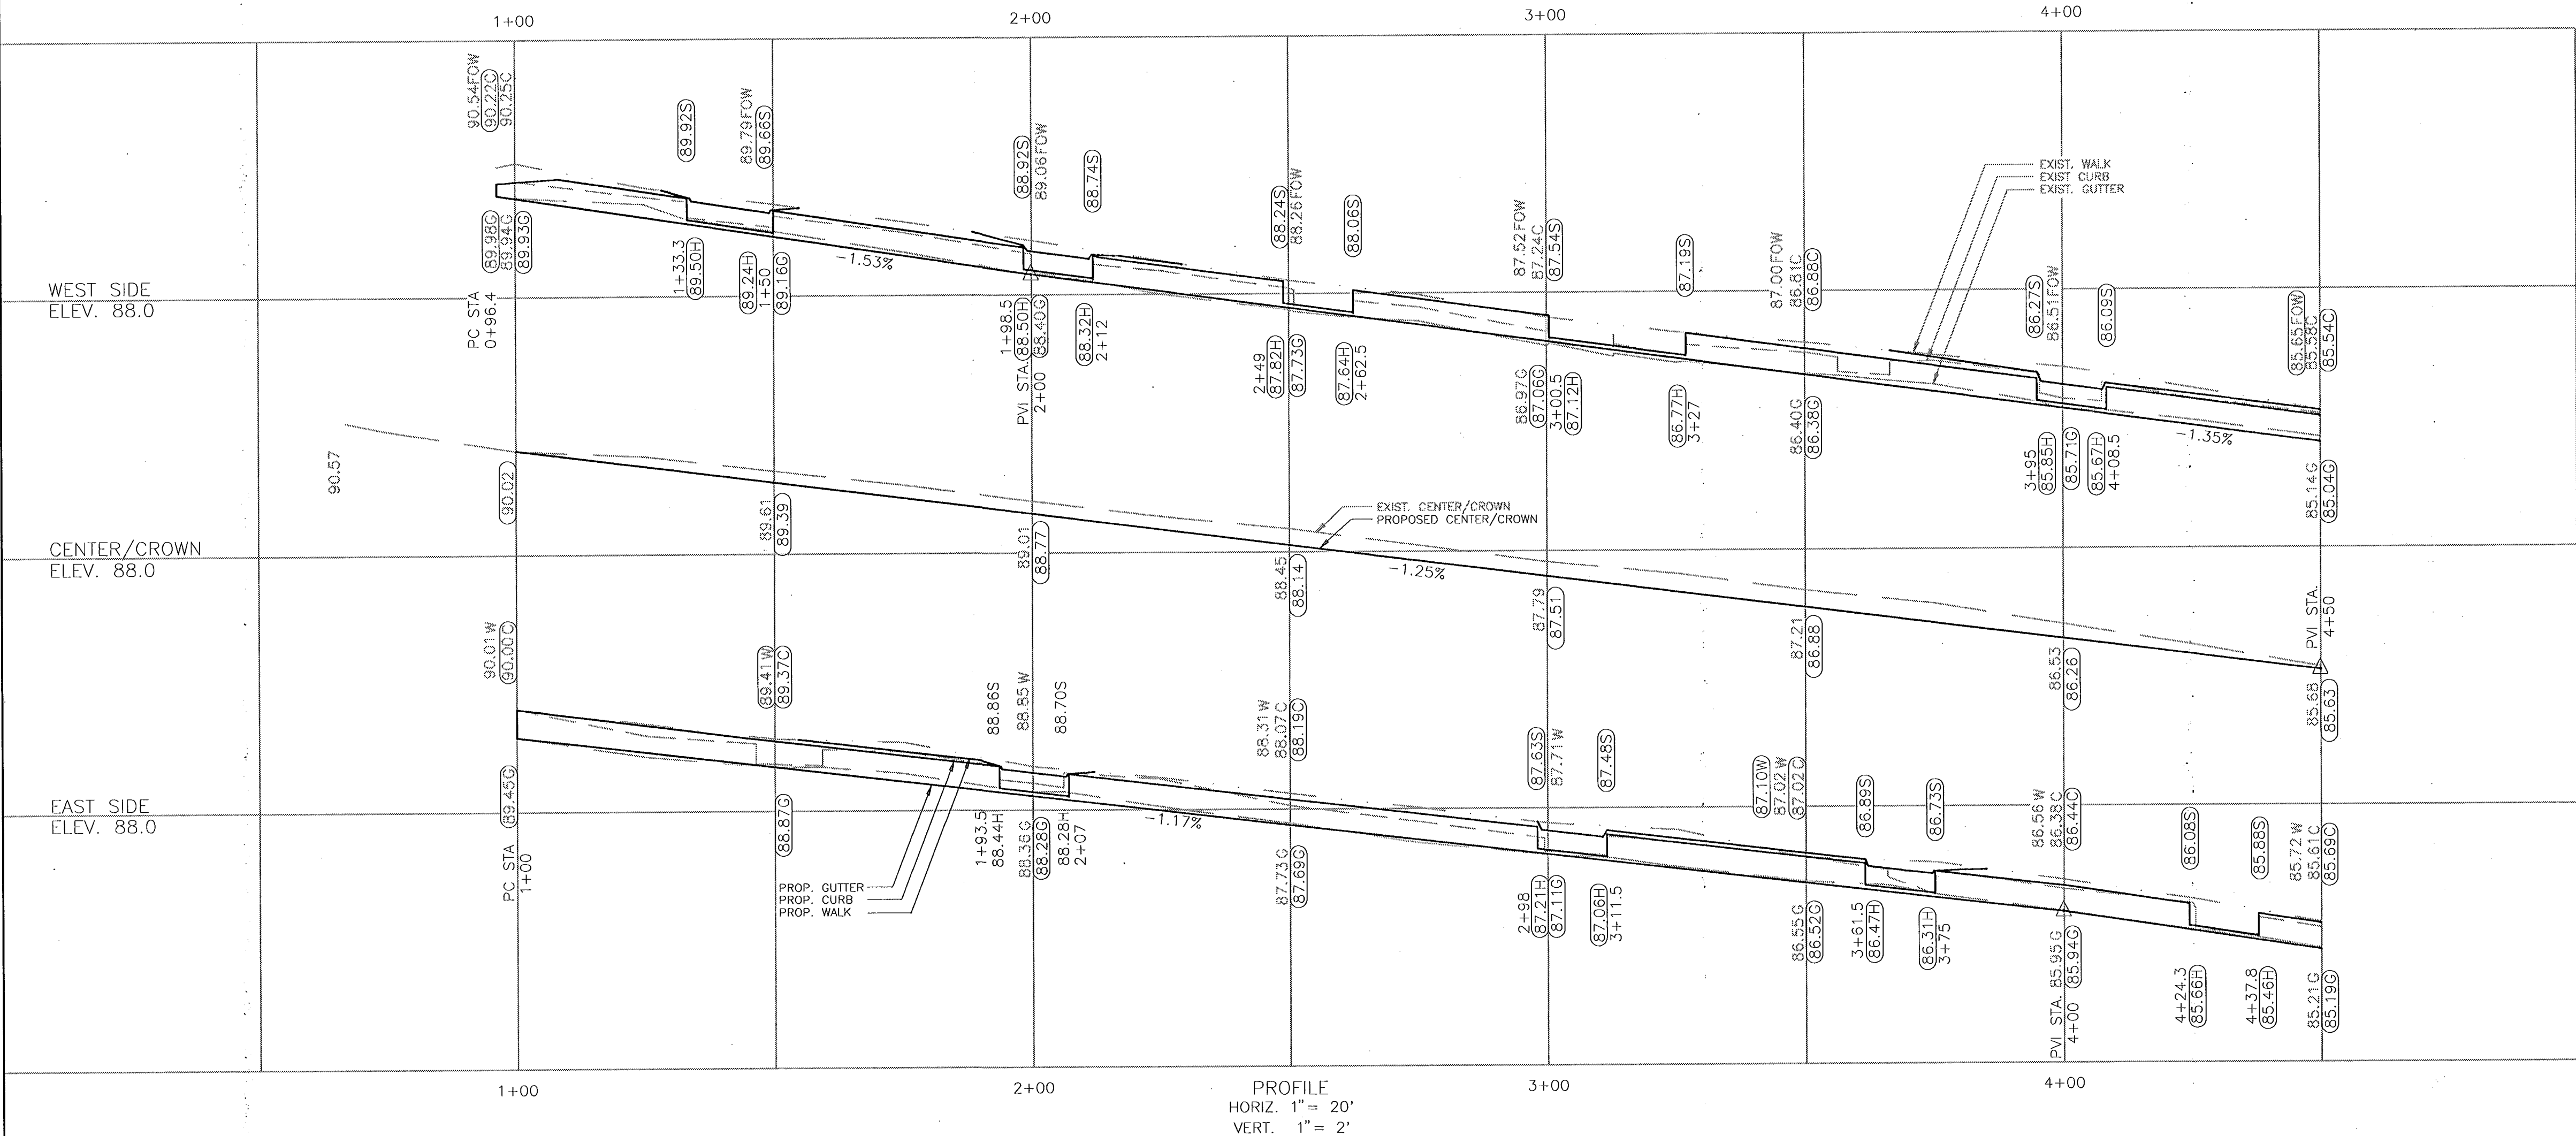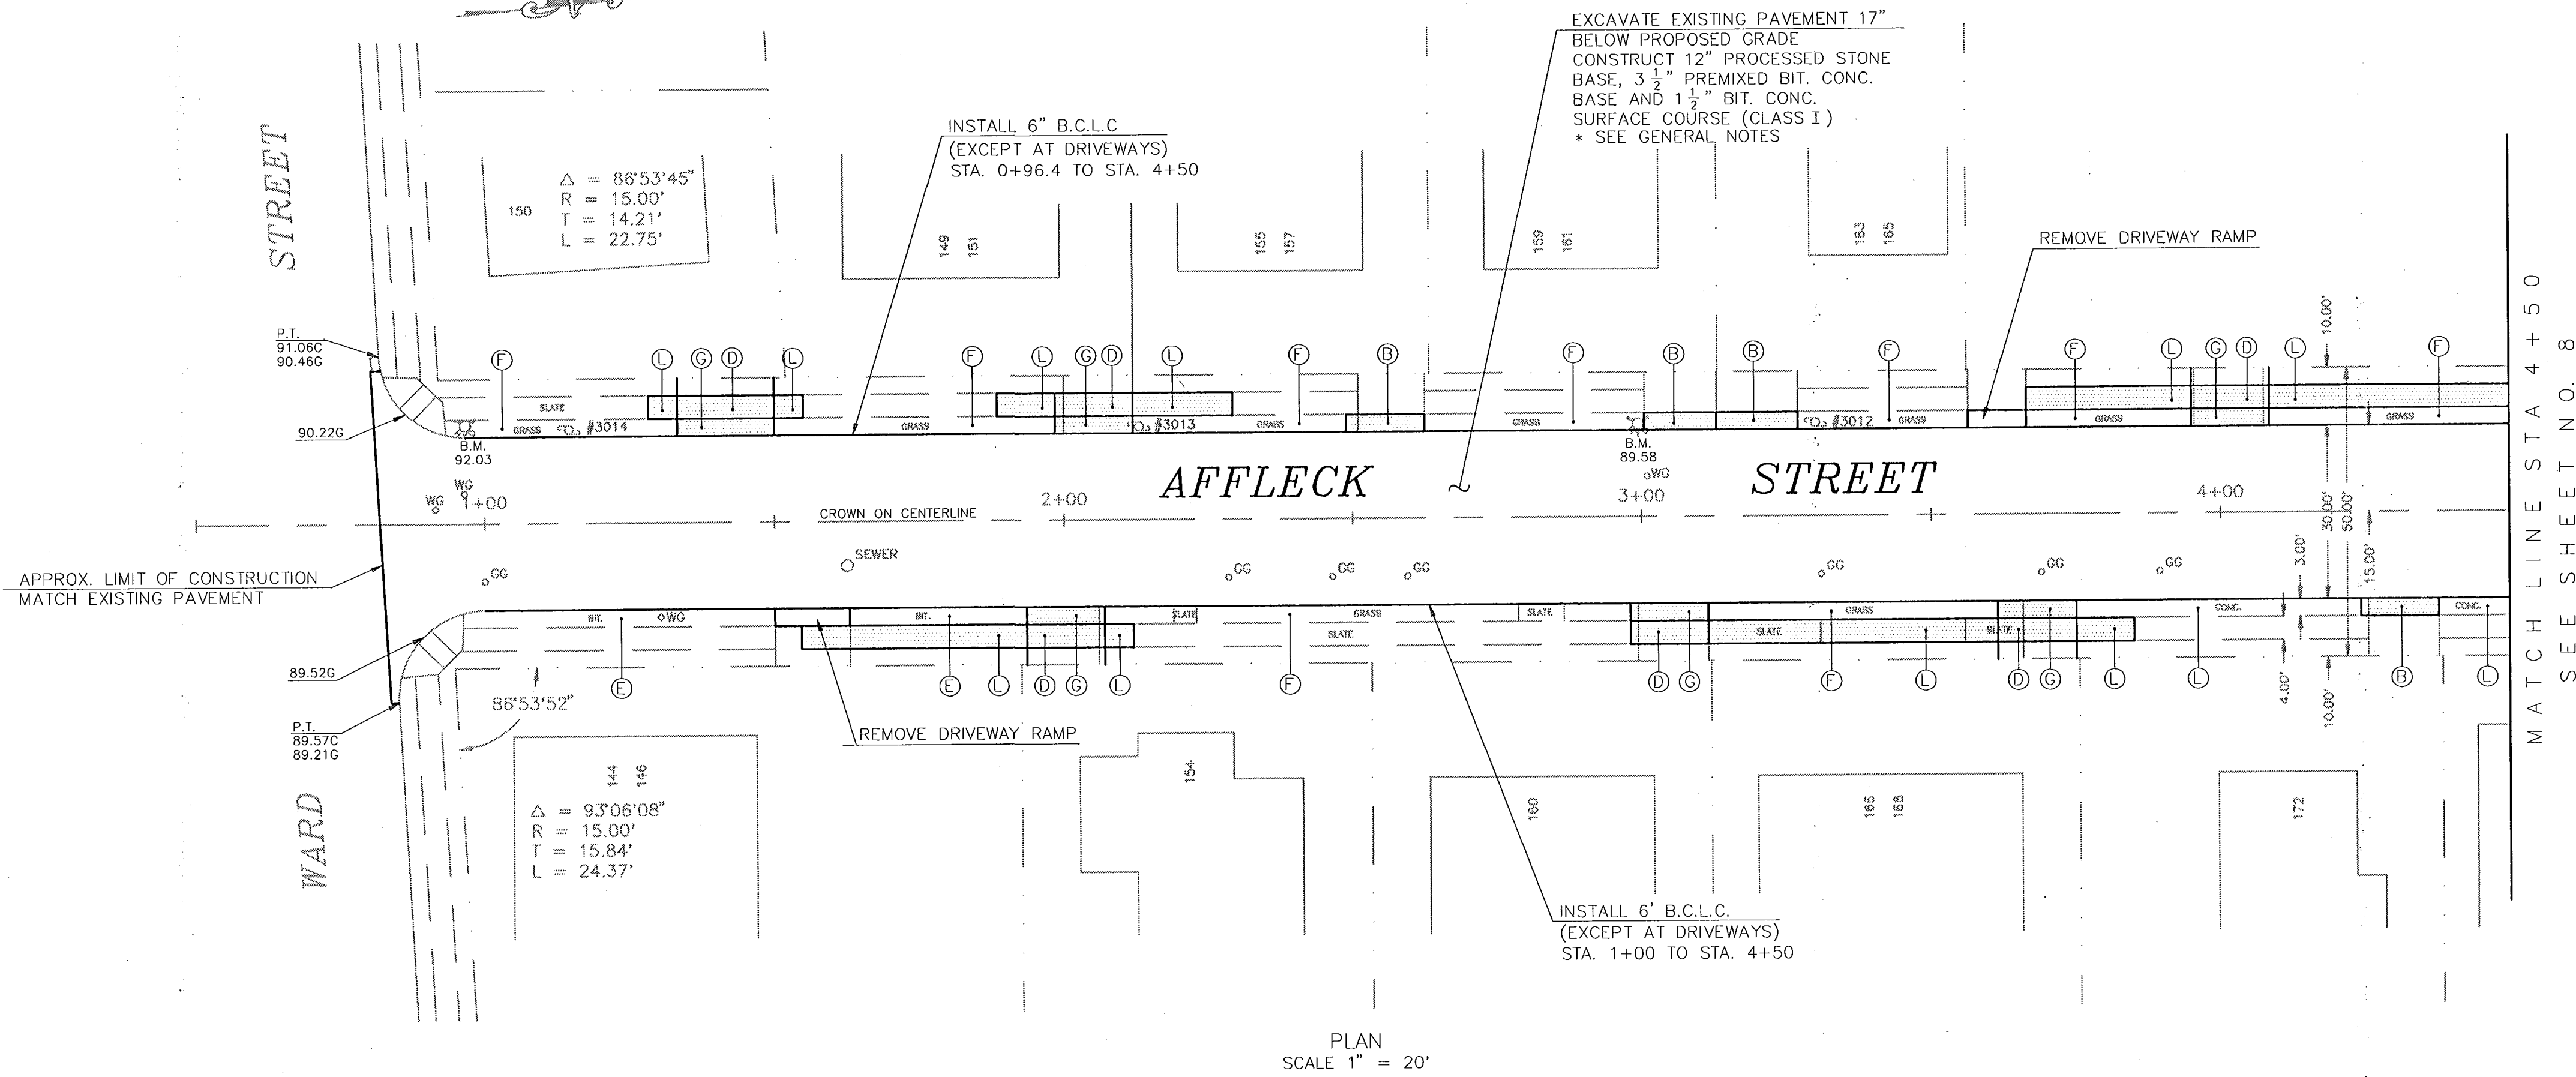

CITY OF HARTFORD, CONNECTICUT DEPARTMENT OF PUBLIC WORKS ENGINEERING SERVICES			
RECONSTRUCTION OF AFFLECK STREET PLAN & PROFILE			
SUBMITTED	RECOMMENDED	APPROVED	
PROJECT ENGINEER	MANAGER	CITY ENGINEER	
DRAWN RDS.	SCALE: HORIZ. 1"=20' VERT. 1"= 2'	DAYBOOK NO. 011282	SHEET 7
CHECKED	DATE	FILE NAME	OF 10