




PLAN
1" = 20'

MATCH LINE STA 4+75
SEE SHEET NO. 8

- ELEVATIONS ARE BASED ON METROPOLITAN DISTRICT COMMISSION (MDC) DATUM
- RIM OR FRAME ELEVATIONS OF ALL UTILITY GATE BOXES, HANDHOLES, MANHOLES AND CATCH BASINS ARE TO BE ADJUSTED AS REQUIRED TO MATCH PROPOSED FINISHED PAVED SURFACES
- CALL BEFORE YOU DIG - THE CONTRACTOR IS HEREBY REMINDED THAT PURSUANT TO PUBLIC ACT 87-71 REQUIRES NOTIFICATION TO UTILITY COMPANIES OF PENDING EXCAVATION AT OR NEAR THE LOCATION OF PUBLIC UTILITIES. THE CONTRACTOR SHALL CALL THIS NUMBER 1-800-922-4455 AT LEAST 48 HOURS, EXCLUDING SATURDAYS, SUNDAYS AND HOLIDAYS, BUT NOT MORE THAN THIRTY DAYS (ONE MONTH) PRIOR TO EXCAVATION
- Ⓑ SAWCUT BETWEEN EXISTING RAMPED SECTION AND SIDEWALK, AND CONSTRUCT NEW 8" REINFORCED CONC. DRIVEWAY RAMP
 - Ⓒ EXISTING DRIVEWAY RAMP TO REMAIN
 - Ⓓ CONSTRUCT 8" REINFORCED CONC. SIDEWALK ON NEW FOUNDATION
 - Ⓔ CONSTRUCT 2" BIT. CONC. SURFACE ON NEW FOUNDATION, EXCEPT AT DRIVEWAYS AND RAMPS
 - Ⓕ SEEDING, FERTILIZING & MULCHING
 - Ⓖ CONSTRUCT 8" REINFORCED CONC. DRIVEWAY RAMP ON NEW FOUNDATION
 - Ⓗ CONSTRUCT BIT. CONC. DRIVEWAY
 - Ⓘ RELAY FLAGSTONE WALK
 - Ⓚ CONSTRUCT 5" CONC. SIDEWALK ON NEW FOUNDATION EXCEPT AT DRIVEWAYS
- BENCH MARKS**
- EL. 75.11 PK NAIL IN POLE, SOUTH SIDE AT STA 1+10
- EL. 77.82 BOLT ON SOUTH FLANGE ON HYD. NORTH SIDE STA 3+56

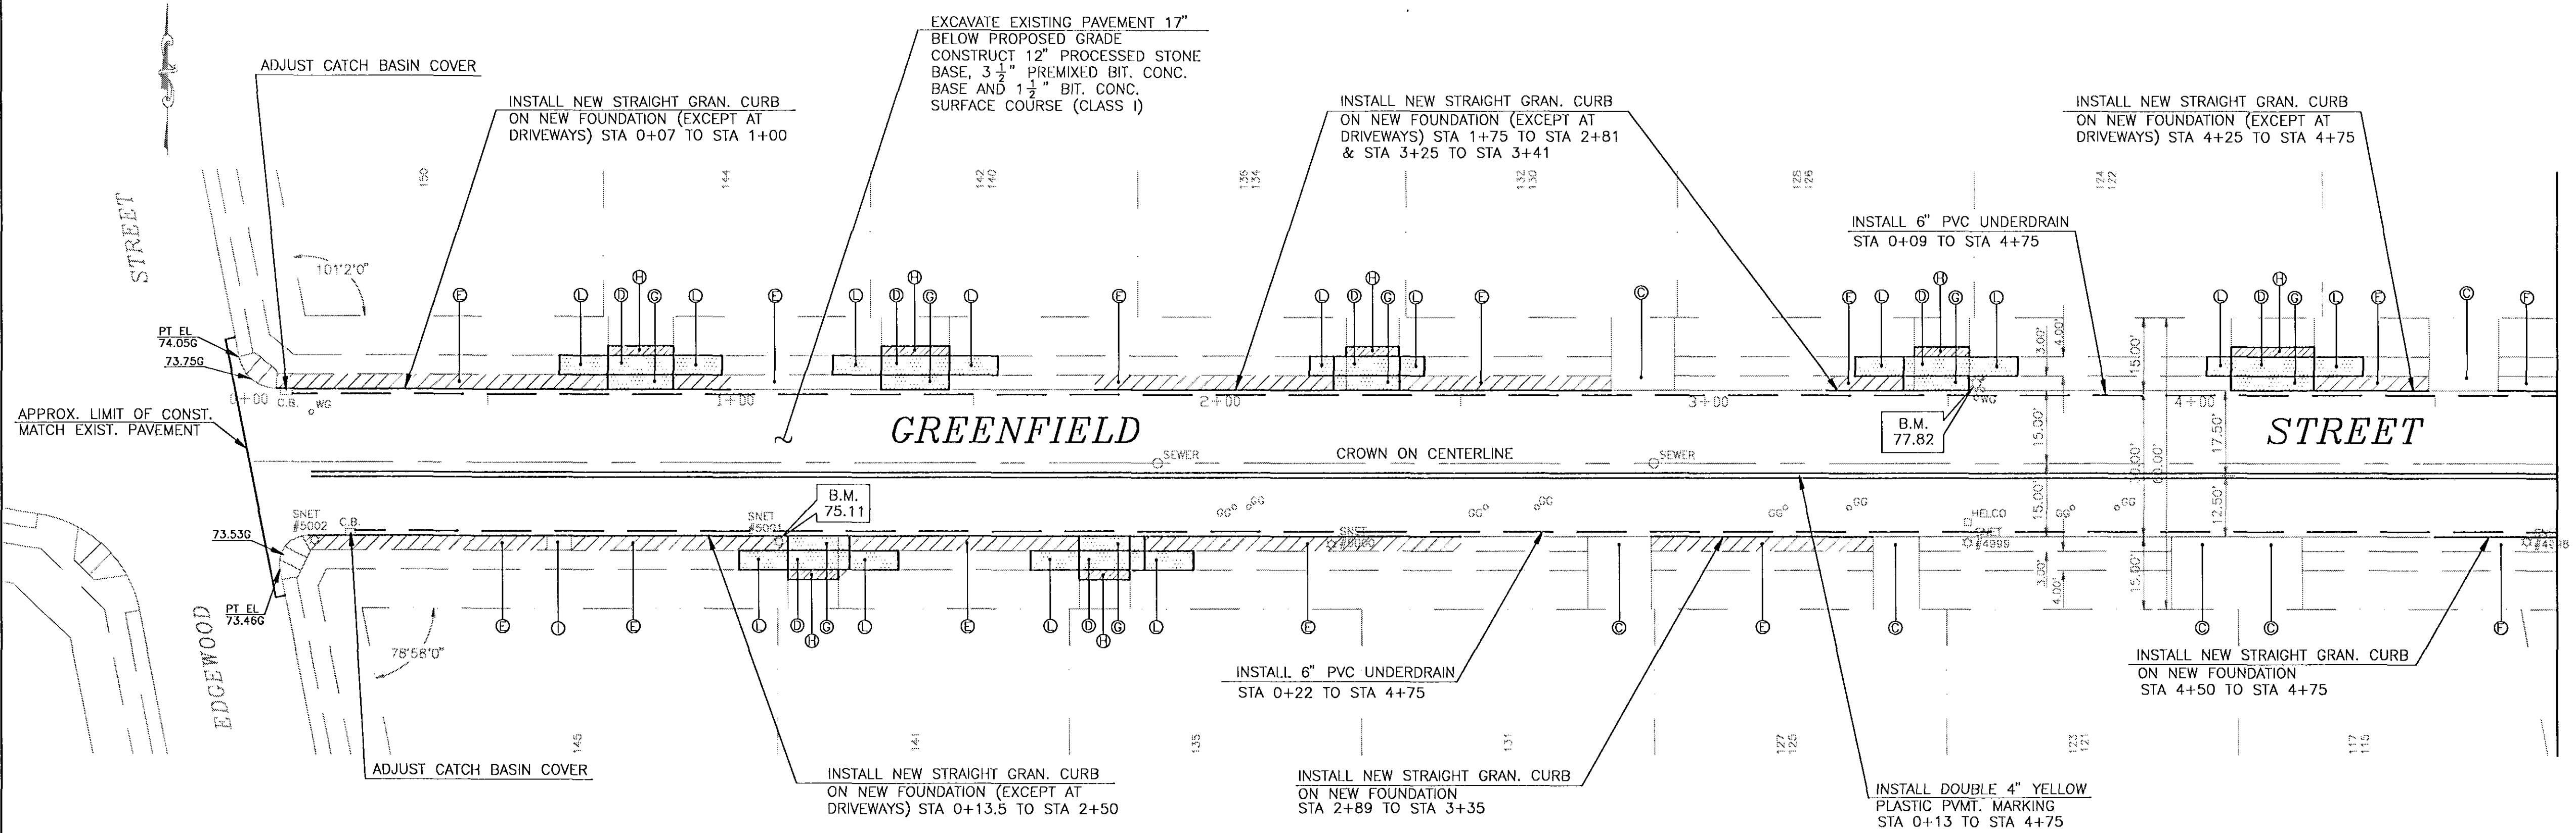