

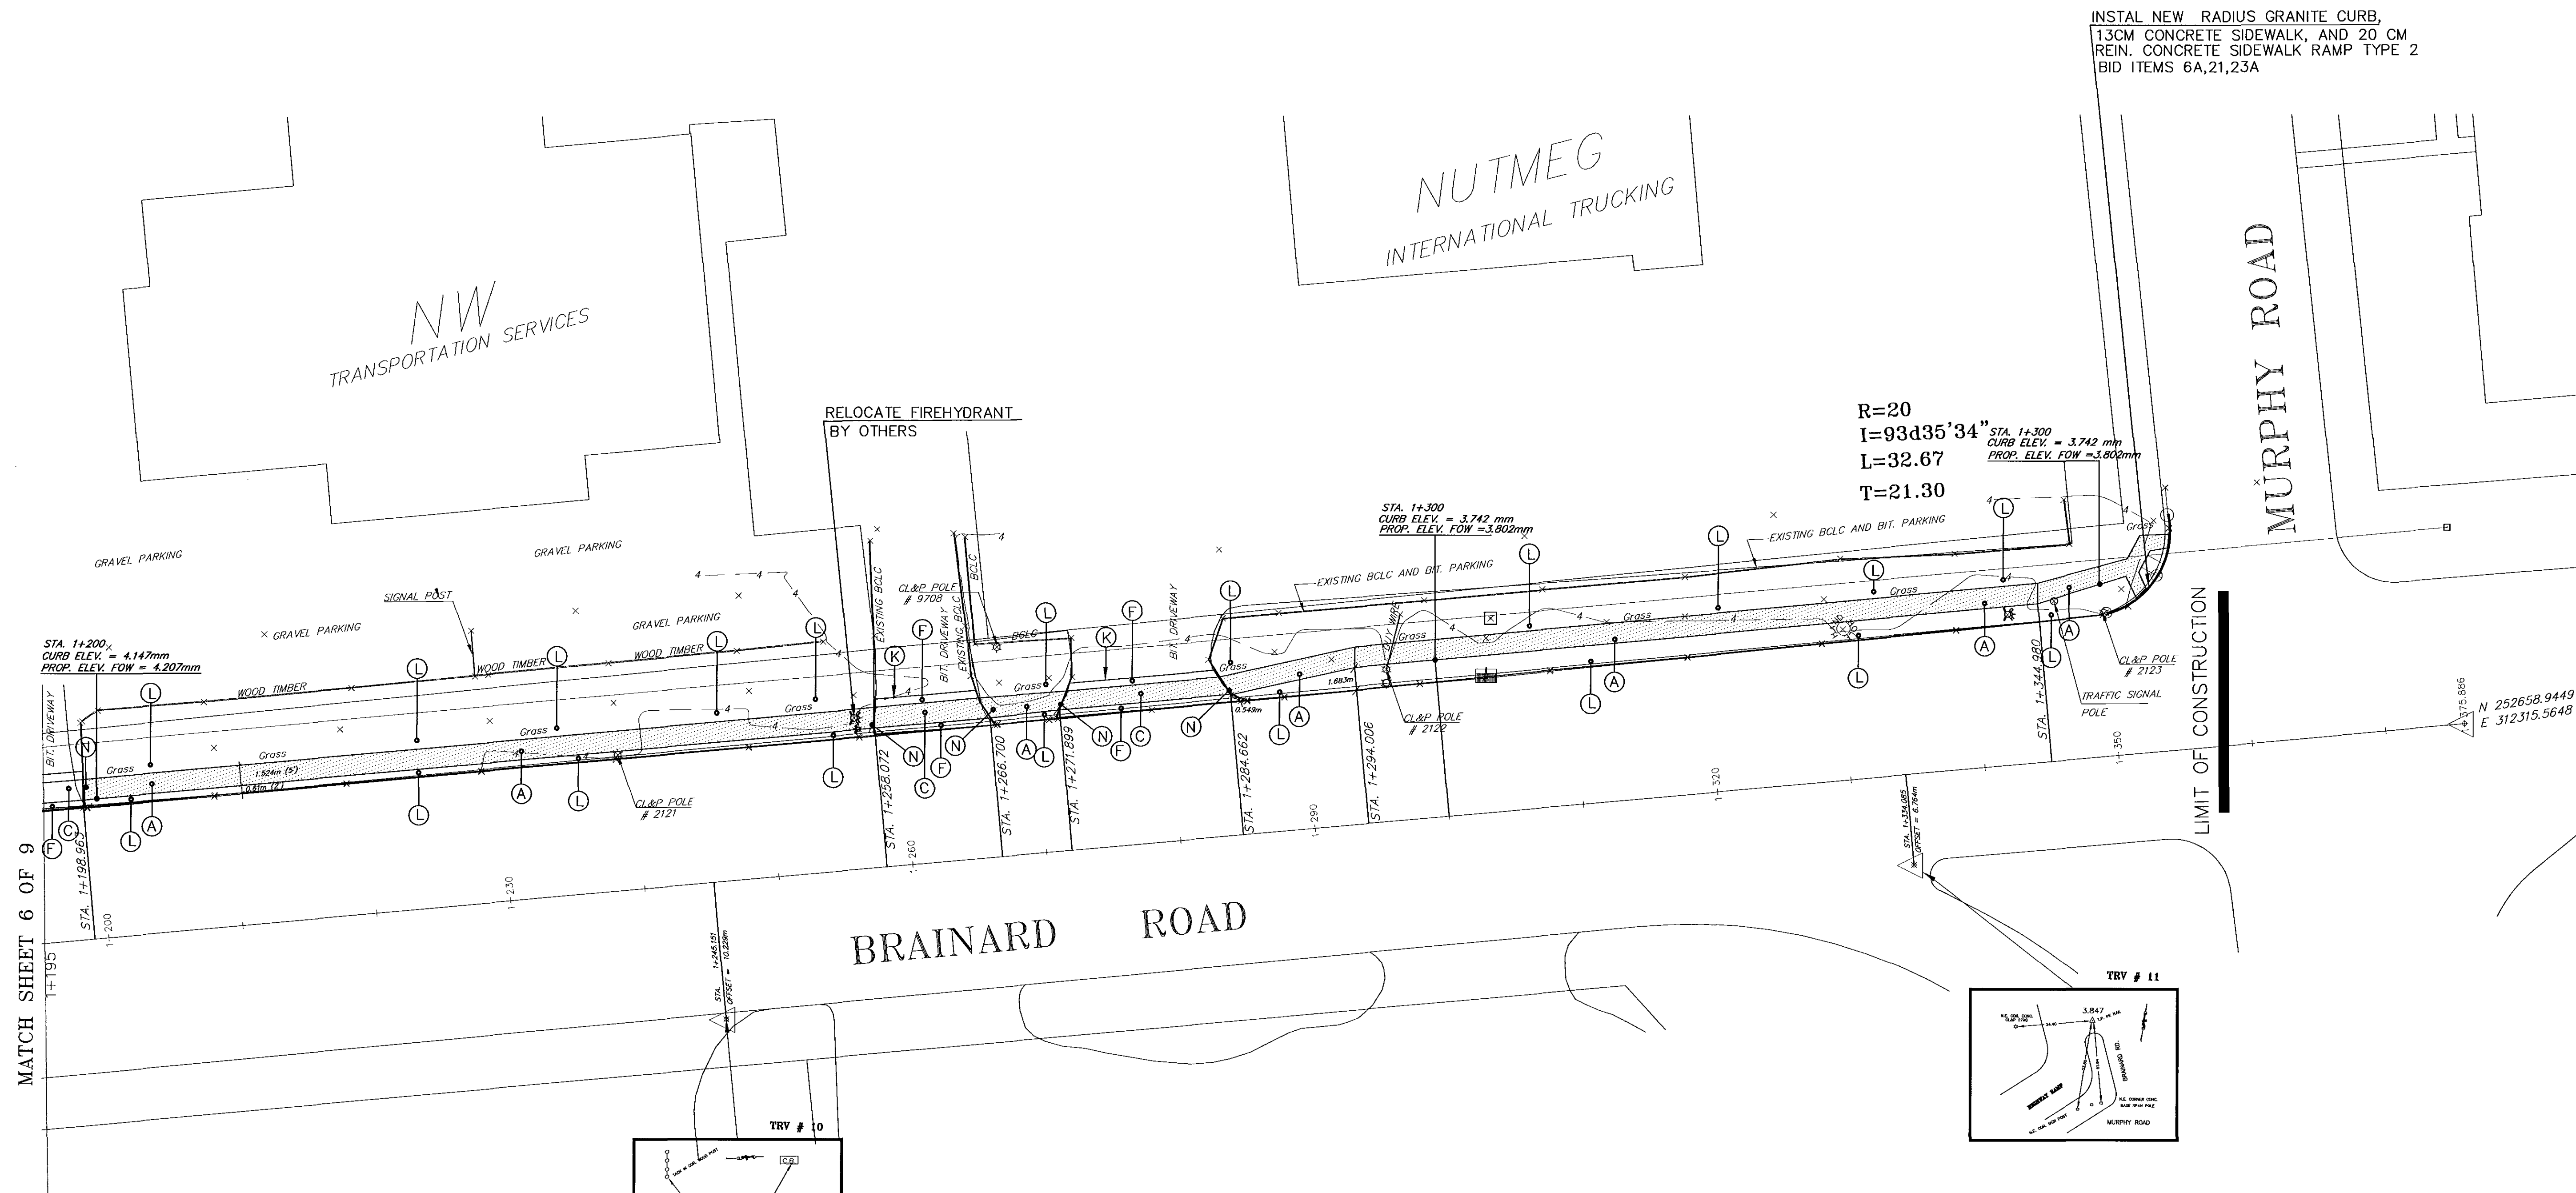


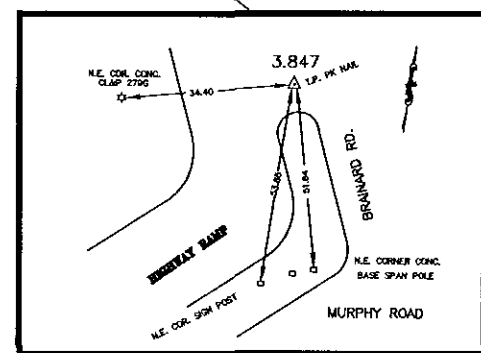

MATCH SHEET 6 OF 9

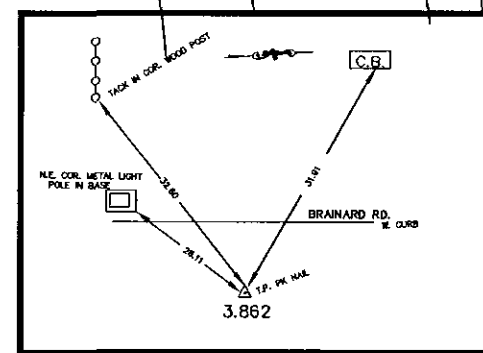

- (A) — CONSTRUCT NEW 125mm(5") CONCRETE SIDEWALK EXCEPT AT DRIVES (BID ITEM #21)
- (B) — CONSTRUCT NEW 200mm(8") REIN. CONCRETE DRIVE RAMP (BID ITEM #23B)
- (C) — CONSTRUCT NEW 200mm REIN. CONCRETE SIDEWALK (BID ITEM #23)
- (D) — CONSTRUCT NEW 200mm REIN. CONCRETE SIDEWALK RAMP (BID ITEM #23A)
- (E) — CONSTRUCT NEW 50mm (2") BIT. CONC. SURFACE ON NEW FOUNDATION (BID ITEM #24A)
- (F) — CONSTRUCT NEW 75mm (3") BIT. CONC. SURFACE ON NEW FOUNDATION (BID ITEM #24B)
- (G) — CONSTRUCT NEW 75mm BIT. CONC. SURFACE ON EXIST. FOUNDATION (BID ITEM #25B)
- (H) — CONSTRUCT NEW 50mm BIT. CONC. SURFACE ON EXIST. FOUNDATION (BID ITEM #25A)
- (I) — CONSTRUCT NEW DOWELED LONGITUDINAL EXPANSION JOINT IN SIDEWALK (BID ITEM #27)
- (J) — SAWCUT CEMENT CONCRETE (BID ITEM #28)
- (K) — SAWCUT BITUMINOUS CONCRETE (BID ITEM #28A)
- (L) — LOAM, SEED, FERTILIZE (BID ITEM #64)
- (M) — EXISTING SIDEWALK RAMP TO REMAIN IN PLACE
- (N) — RAMP WALK TO MEET EXISTING AND/OR PROPOSED WALK GRADES. RAMP SHOULD NOT EXCEED 2% PER ADA
- (O) — REMOVE EXISTING GRANITE CURB (BID ITEM #10A) NOTE: ONLY PAID FOR WHEN NEW CURB IS NOT REPLACING EXIST. CURB.
- (X) — CONSTRUCT NEW LONG./TRANS. CONSTRUCTION JOINT 600mm O.C. IN CONC. ROAD BASE (INCLUDE COST IN BID ITEM #41B)
- (Y) — CONTRACTOR SHALL GET ALL THE TRUE DIMENSIONS OF THE SIDEWALK, RAMPS AND LOCATION OF UTILITIES FROM THE PLANS

CITY OF HARTFORD, CONNECTICUT DEPARTMENT OF PUBLIC WORKS ENGINEERING SERVICES			
SIDEWALK CONSTRUCTION PLANS FOR AIRPORT ROAD AND BRAINARD ROAD BRAINARD (STA.1+195 TO STA. 1+375.886)			
SUBMITTED <i>[Signature]</i> PROJECT ENGINEER	RECOMMENDED <i>[Signature]</i> MANAGER	APPROVED <i>[Signature]</i> CITY ENGINEER	
DRAWN HYO CHECKED BNP	SCALE: 1=250m(H) 1=25m(V)	DATE DAYBOOK NO. 001371 FILE NAME AIRBRN1.DWG	SHEET 7 OF 9