



NO.	DATE	DESCRIPTION	APPROVED	DATE:
			<i>James Proctor</i>	9-17-99
REVISIONS			STRUCTURE NO.	BRIDGE LOG NO. STRUCTURE SHEET NO.
				4R of 15R

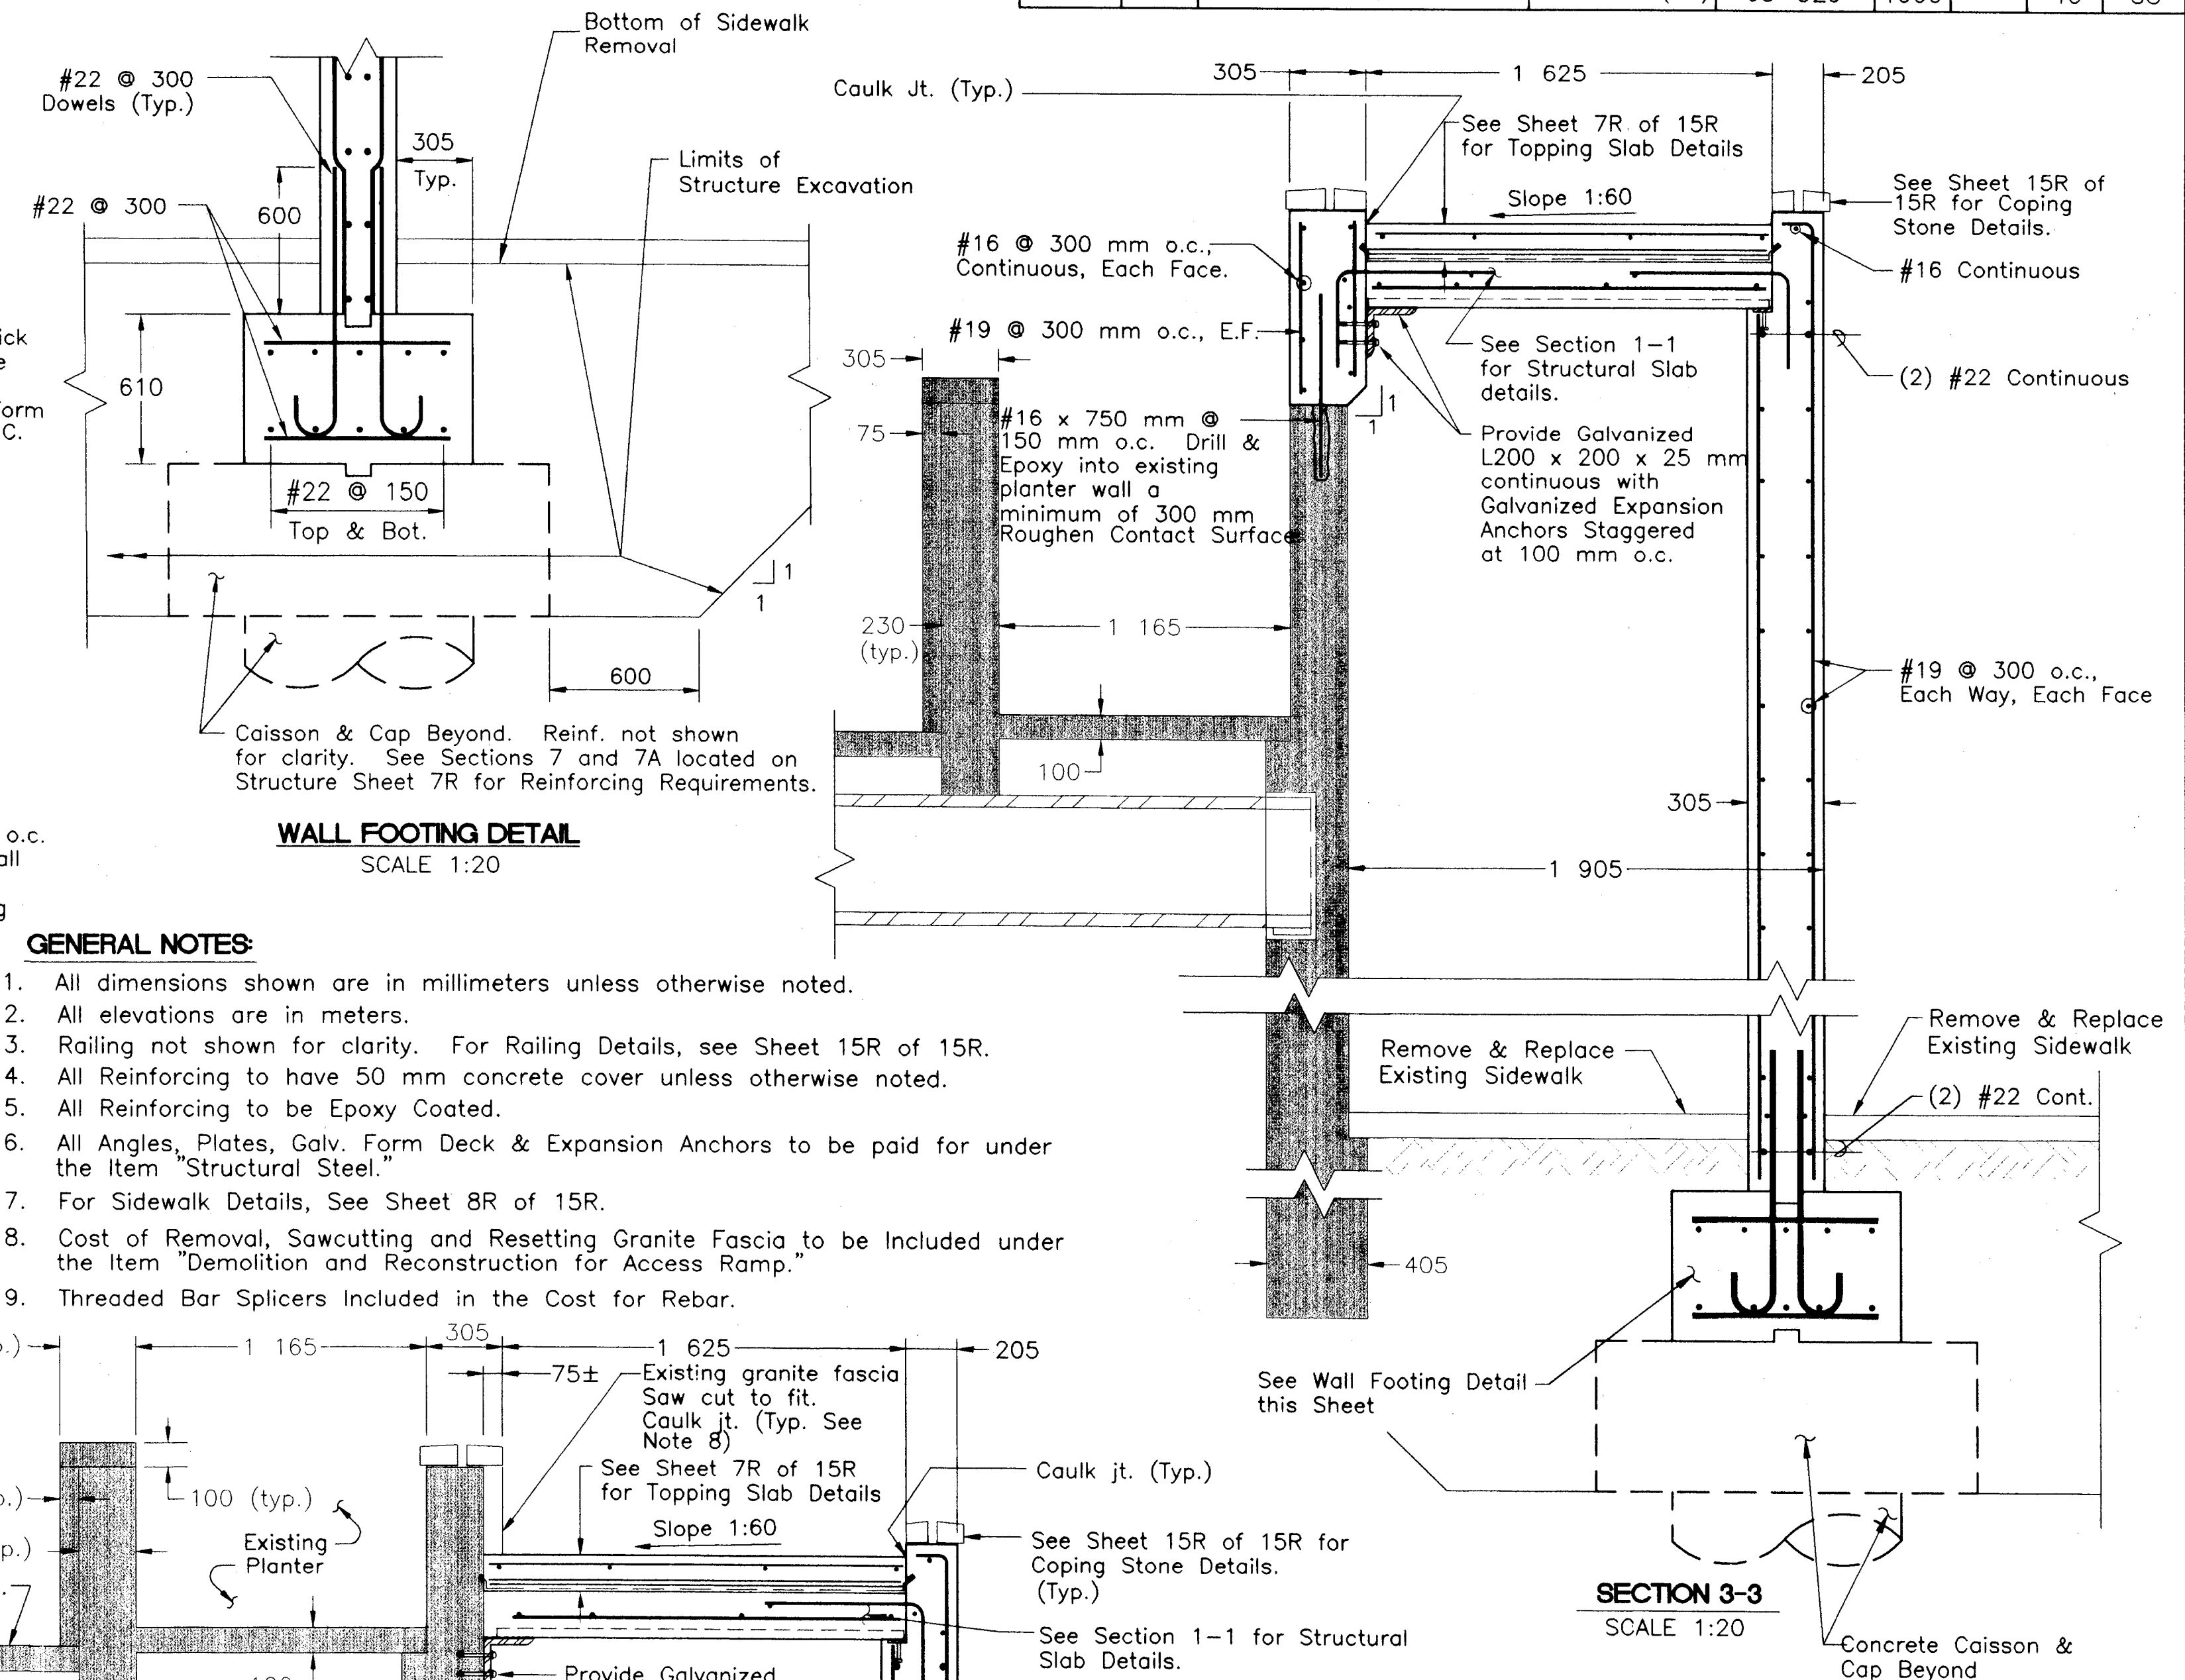

1. All dimensions shown are in millimeters unless otherwise noted.
2. All elevations are in meters.
3. Railing not shown for clarity. For Railing Details, see Sheet 15R of 15R.
4. All Reinforcing to have 50 mm concrete cover unless otherwise noted.
5. All Reinforcing to be Epoxy Coated.
6. All Angles, Plates, Galv. Form Deck & Expansion Anchors to be paid for under the Item "Structural Steel."
7. For Sidewalk Details, See Sheet 8R of 15R.
8. Cost of Removal, Sawcutting and Resetting Granite Fascia to be Included under the Item "Demolition and Reconstruction for Access Ramp."
9. Threaded Bar Splicers Included in the Cost for Rebar.

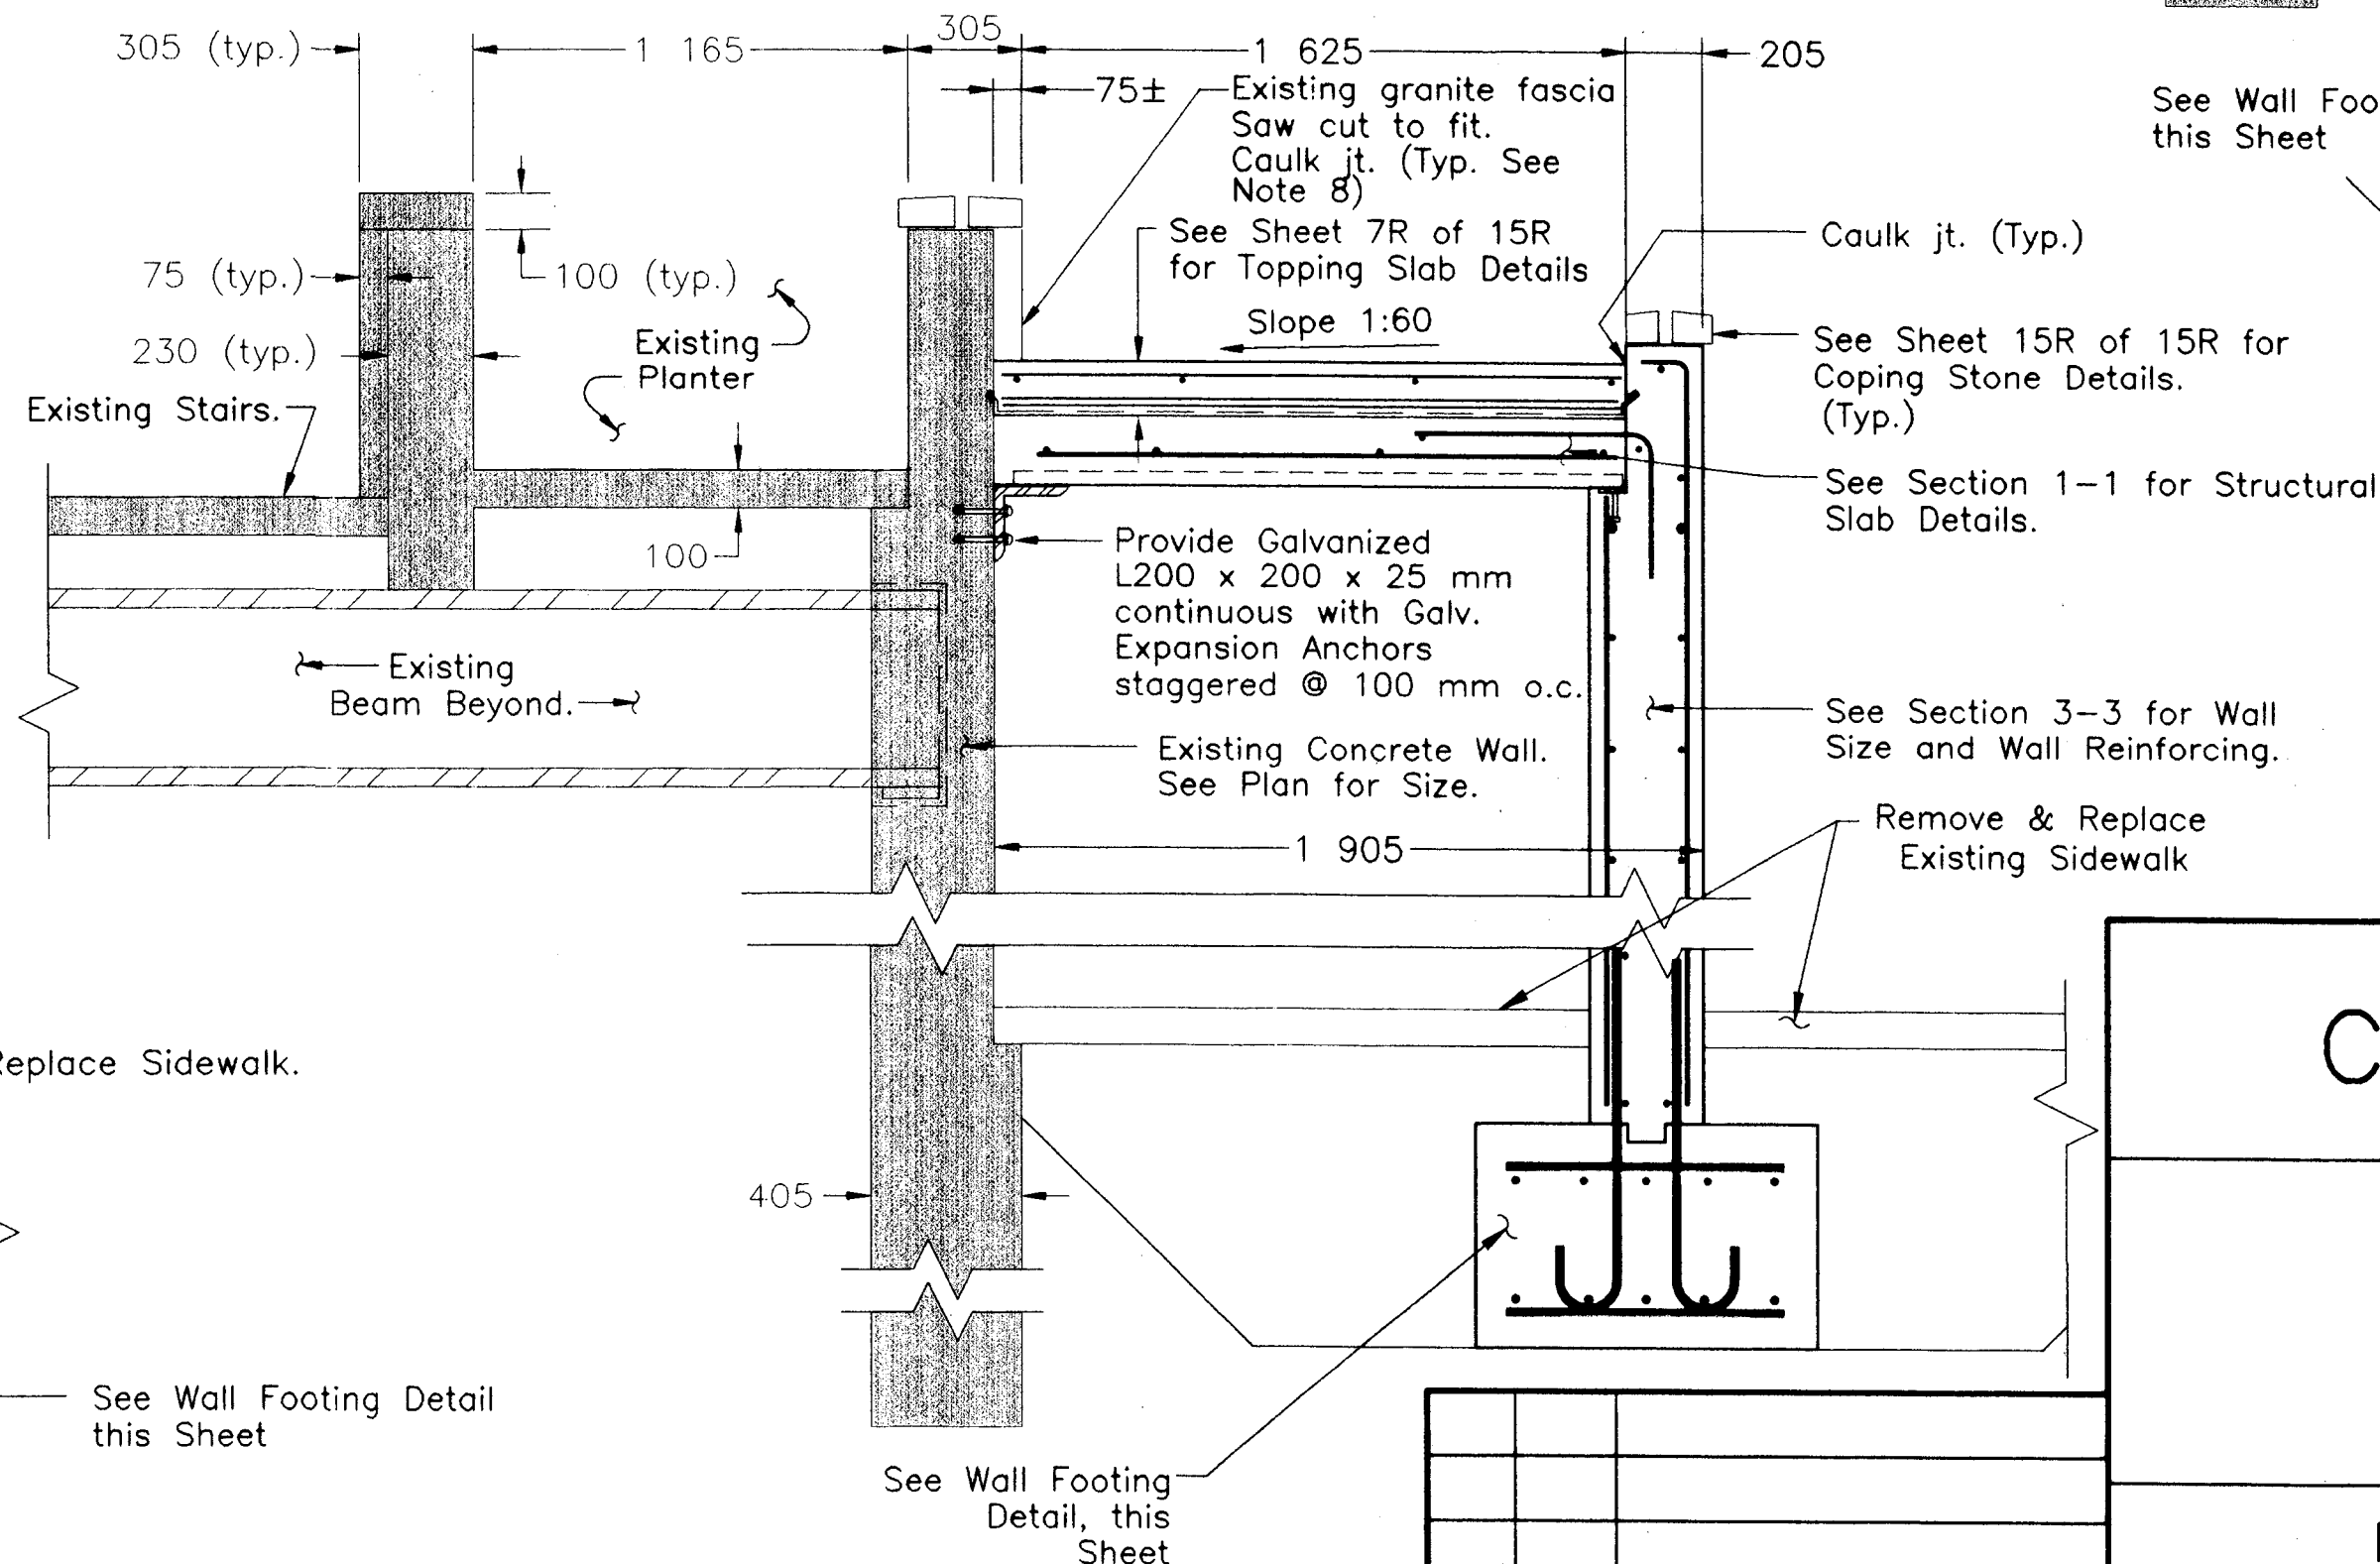

PROPOSED RAMP SECTIONS - 1

STRUCTURE SHEET NO.

REVISIONS