


POLICE SUBSTATION UNDER CONSTRUCTION

INSTALL 1" COPPER LINE

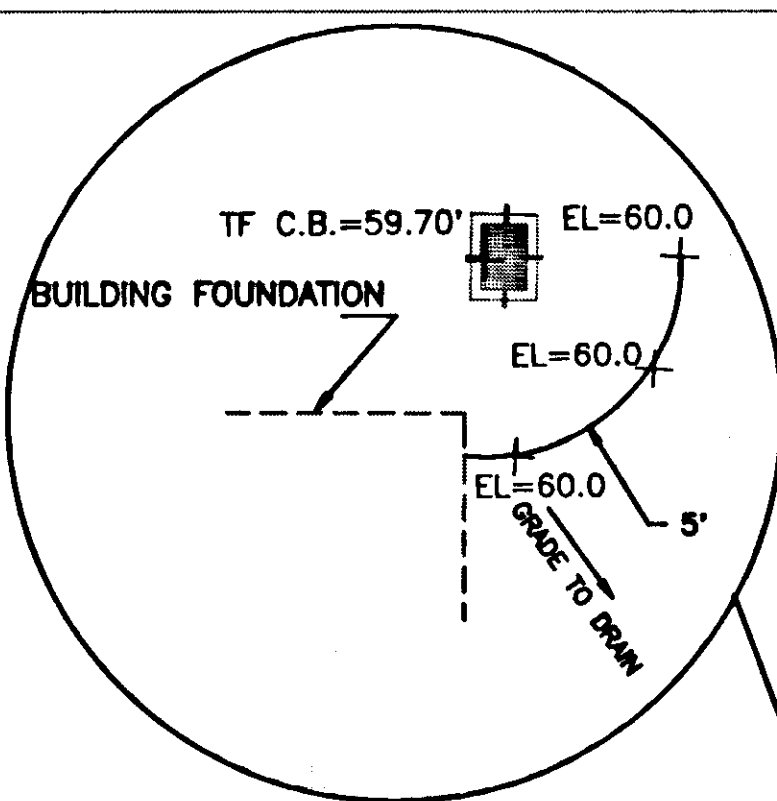

EXIST. WY. CURB TO BE REINFORCED

N/F
ECKFORD E. STREET
AND
VIOLA M. STREET

REMOVE EXISTING RETAINING WALL

REMOVE SECTION OF THE EXISTING WALL

INSTALL BASKETBALL STANDARD BACKBOARD AND GOAL
MODEL NO. BB-18-4C, AS MANUFACTURED BY
BURKE COMPANY INC. OR APPROVED EQUAL (SEE DETAILS)GRADE EXISTING SITE WITH RECYCLE
MILLING MATERIAL AND/OR BANKRUN GRAVEL
TO 3" BELOW PROPOSED GRADE AND PAVE
WITH 3" BITUMINOUS CONCRETE (CLASS 2).
TWO 1 1/2" COURSES.APPROX. NORTHERLY
LIMIT OF PAVINGCITY OF HARTFORD
614-630 ALBANY AVENUEREMOVE 20 L.F. OF EXISTING FENCE, PROVIDE TEMPORARY
BITUMINOUS ACCESS RAMP AND INSTALL GATE.

INSTALL TWO FLATTOP PRECAST CONCRETE BASINS WITH 2' SUMP

RESTORE EXISTING ROADWAY, CURB AND CONSTRUCT
5" CONCRETE WALK ON NEW FOUNDATIONINSTALL 104 LF OF 10" P.V.C. AND 45 LF OF
10" PVC TO CONNECT NEW CATCH BASINS TO M.H.

INSTALL TEMPORARY SHEET PILING

14 FT. CHAIN LINK FENCE TO BE INSTALLED BY OTHERS
1 FT OFF EXISTING CONCRETE WALKINSTALL TWO (400 WATTS) H.P.S. LUMINAIRES, STERNER MAKE
ON 25' POLE CONNECTED TO PANEL WITH 1" P.V.C. CONDUIT.
(WORK TO BE DONE BY OTHERS)

REMOVE EXISTING CONCRETE WALL

NEW C.B. # 2
TF=56.55'
FL=51.80'EXISTING M.H.
TF=55'
FL (OUT)=47.13'
FL (IN)=48.20'CITY OF HARTFORD, CONNECTICUT
DEPARTMENT OF PUBLIC WORKS
TRANSPORTATION SERVICES BUREAUPLAN TO DEVELOP
PROPERTY AT 614-630 ALBANY AVENUE
HARTFORD, CONNECTICUT

SUBMITTED	RECOMMENDED	APPROVED
PROJECT ENGINEER	MANAGER	CITY ENGINEER
DRAWN MK	SCALE:	DAYBOOK NO. 01397
CHECKED JS	1"=20'	DATE MAY 22, 1996
		FILE NAME ALBANY-BB.DWG
		SHEET 1 OF 3