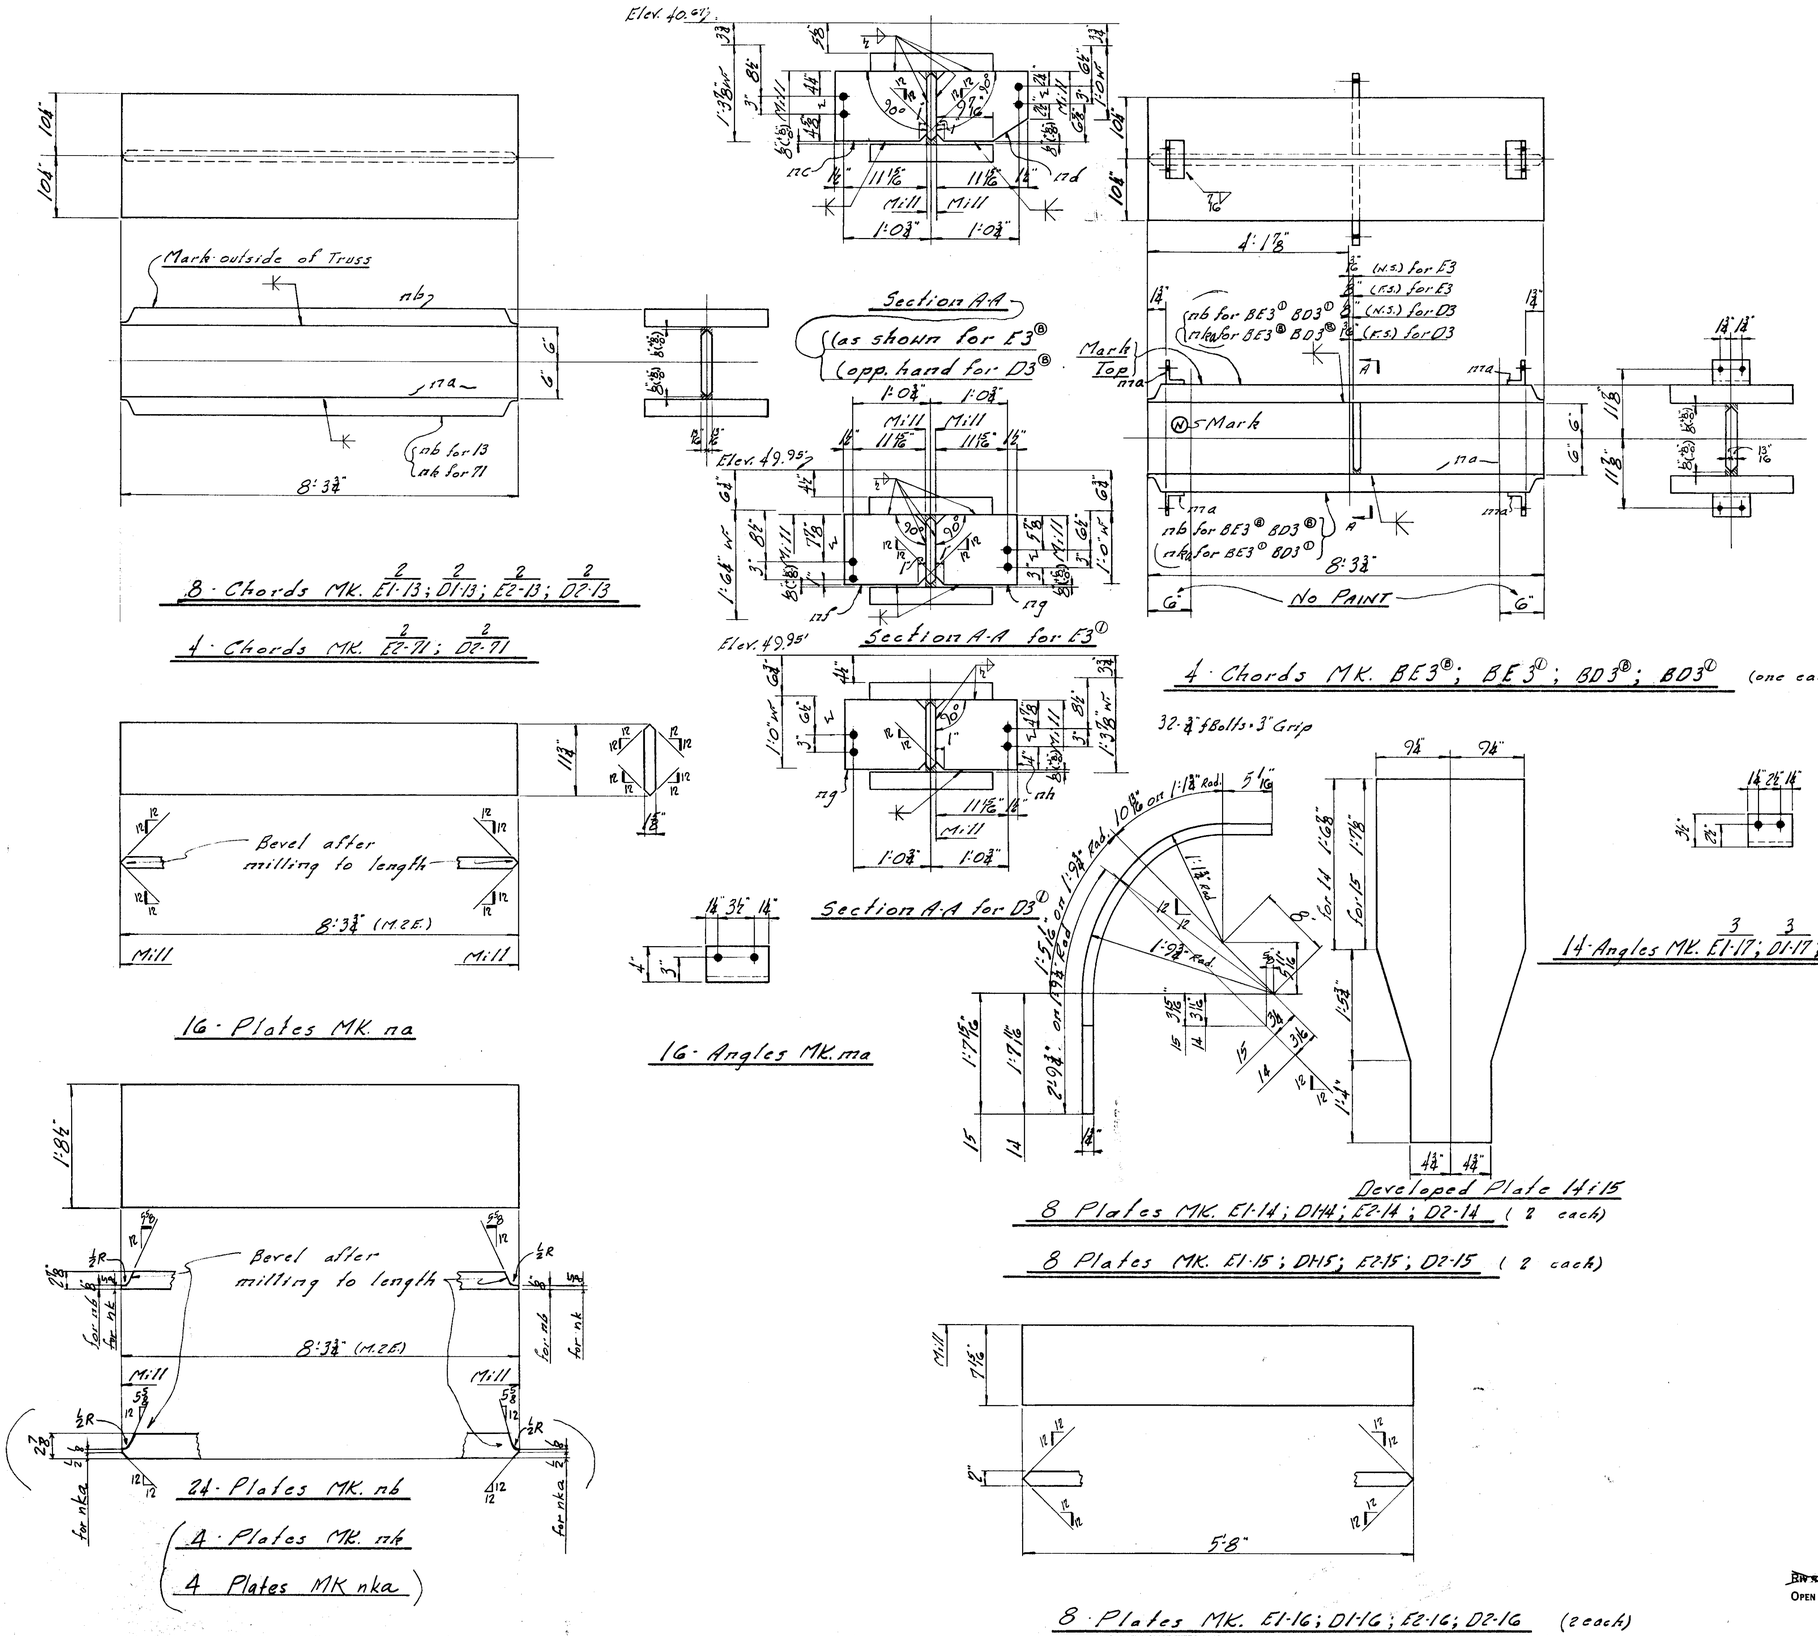

8 · Chords MK. E1-13; D1-13; E2-13; D2-13

4 · Chords MK. E2-71; D2-71

4 · Chords MK. BE3®; BE3①; BD3®; BD3① (one each)

32 · ¾ ϕ Bolts · 3" Grip

16 · Plates MK. na

16 · Angles MK. ma

14 · Angles MK. E1-17; D1-17; E2-17; D2-17

8 Plates MK. E1-14; D1-14; E2-14; D2-14 (2 each)

8 Plates MK. E1-15; D1-15; E2-15; D2-15 (2 each)

24 · Plates MK. nb

(4 · Plates MK. nk

4 Plates MK nka)

8 · Plates MK. E1-16; D1-16; E2-16; D2-16 (2 each)

WEIGHT	NO. PCS.	ASS'M MK.	SHAPE	LENGTH		REMARKS	ORDERED
				2	2	2 2	
	8 · Chords MK. E1-13; D1-13; E2-13; D2-13						
					2	2	
	4 · Chords MK. E2-71; D2-71						
4 566	12	na	PS 11½" · 1⅝"	8	3¾	M2E	ord 28-15-1⅝-1010 cut 11½-1⅝-8-4¾
32 736	20	nb	PS 20½" · 2⅞"	8	3¾	do 16 for 13 4 for 71	ord 30-13-2⅞-1011 cut 20½-2⅞-8-4¾
6 148	4	nk	PS 20½" · 2⅞"	8	3¾	do for 71	do
235	PAINT						
47 285	TOTAL						
	8 · Plates MK. E1-14; D1-14; E2-14; D2-14 (2 ea.)						
3 916	8		PS 18¾" · 1¼"	4	4⅜	(Bent) 12 13 Sh. 1 FD2	ord
20	PAINT						
3 936	TOTAL						
	8 · Plates MK. E1-15; D1-15; E2-15; D2-15 (2 ea.)						
3 934	8		PS 18¾" · 1¼"	4	4⅜	(Bent) 12 13 Sh. 1 FD1	ord
20	PAINT						
3 954							
	8 · Plates MK. E1-16; D1-16; E2-16; D2-16 (2 ea.)						
4 480	8		PS 7 15/16" · 2"	5	8	M. ledge	ord 18-12-15-10 cut 8-2-5-8
12	PAINT						
2 492	TOTAL						
				3	3	4 4	
	14 · Angles MK. E1-17; D1-17; E2-17; D2-17						
60	14		LS 3½" · 3" · ½"	0	5		
	4 · Chords MK. BE3®; BE3①; BD3®; BD3① (1 ea.)						
2 189	4	na	PS			Same crop end for Lot 4 Sh. 28	ord 28-15-1⅝-2879 cut 11½-1⅝-8-4¾
6 747	4	nb	PS				ord 30-13-2⅞-2011 cut 20½-2⅞-8-4¾
89	16	ma	LS 4" · 3" · ½"	0	6		
69	2	nc	PS 11⅞" · ¾"	1	1/16	Mitered for E2® D2®	3 Pieces 12'-3'-1 1/16"
68	2	nd	PS do	1	1/16	Mitered for E2① D2①	do
34	One	ne	PS do	1	1/16	Mitered for E3® D3®	do
69	2	nf	PS do	1	1/16	Mitered for E3① D3①	do
34	One	nh	PS do	1	1/16	for D3①	do
6 742	4	nka	PS 20½" x 2⅞"	8	3¾	M2E	ord 30-13-2⅞-2011 cut 20½-2⅞-8-4¾
80	PAINT						
16 128	TOTAL						

TOTAL	ORD.	PLATES	STD.	BOLT	RIV.	PAINT
73855	73064	275	149			367

DATE	REVISION	BY	CH'K'D
3/14/55	PL-nk quant. chg'd nka added	CLF	

Lehigh Structural Steel Co.
ALLENTOWN, PA.

HARTFORD PUBLIC LIBRARY
HARTFORD, CONN.
VIERENDEEL TRUSSES "D" & "E"

IN CHARGE OF C.L. DATE
DRAWN BY F.P.D. DATE 21 Oct 54
CHECKED BY R.C.C. DATE 11-8-54
SCALE

CONTRACT NUMBER 4089
SHEET NUMBER 9

OPEN HOLES:- 13/16 ϕ

Lot 2